

Calbrite™

Stainless Steel Conduit Systems

Stainless Steel EMT Compression Union (Coupling)

Features:

- Manufactured in type 316 stainless steel for increased corrosion resistance
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless EMT conduit
- Addition of stainless and plastic ferrule assures weatherproof seal
- Connectors assembled with ferrules, no separate pieces to purchase or stock
- No package qty. required

Certifications and Compliances:

Calbrite stainless steel EMT fittings and accessories are fabricated to UL standards NEMA 4X approved

Material:

Body: 316SS

Stainless Ferrule: 316SS



Red Ferrule: Nylon

Applications:

Used to join two lengths of stainless EMT.

Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Marine & Coastal Facilities
- Pulp and Paper Mills
- Along with other corrosive environments

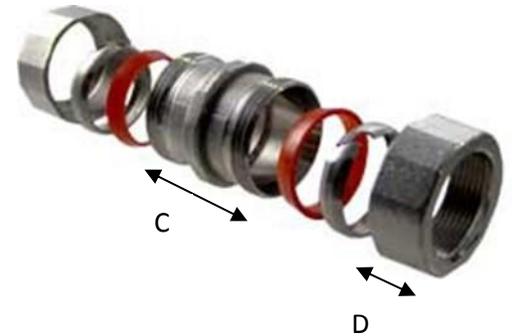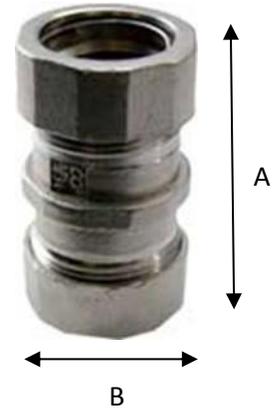

Size	Part Number	A	B	C	D	I.D.	Wt. ea per lb.
1/2"	S20500CC00	2.100"	1.050"	1.350"	0.540"	0.706"	0.16
3/4"	S20700CC00	2.100"	1.250"	1.350"	0.540"	0.922"	0.21
1"	S21000CC00	2.200"	1.550"	1.500"	0.570"	1.163"	0.31
1-1/4"	S21200CC00	2.500"	1.930"	1.770"	0.570"	1.510"	0.47
1-1/2"	S21500CC00	2.700"	2.250"	1.900"	0.600"	1.740"	0.65
2"	S22000CC00	2.770"	2.750"	2.125"	0.650"	2.200"	0.87

All dimensions are for informational purposes only * Tolerances +/- 5%