

Calbrite™

Stainless Steel Conduit Systems

Stainless Steel Grounding Locknuts

Features:

- Made from Type 316 stainless steel for increased corrosion resistance
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- No package qty. required



Certifications and Compliances:

Manufactured to UL 514B standards


All Locknuts are intended to be installed in accordance with ANSI/NFPA 70, "National Electrical Code" (NEC)

Applications:

Used to connect threaded conduit or connector to a threadless opening in a box, enclosure, or fitting. This heavy-duty Grounding Locknut is manufactured in type 316 stainless for superior strength and corrosion resistance.

Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Marine & Coastal Facilities
- Pulp and Paper Mills
- Along with other corrosive environments

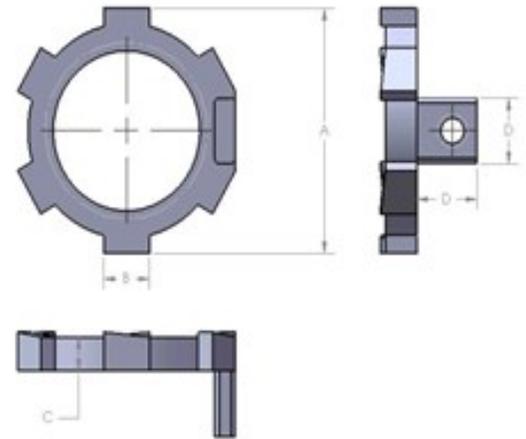

Size	Part Number	A	B	C	D	Weight Per Ea (lbs)
1/2"	S60500LNWG	1.250"	.250"	.140"	.450"	.02
3/4"	S60700LNWG	1.450"	.280"	.170"	.450"	.03
1"	S61000LNWG	1.810"	.280"	.200"	.500"	.05
1-1/4"	S61200LNWG	2.200"	.280"	.220"	.500"	.08
1-1/2"	S61500LNWG	2.440"	.280"	.220"	.500"	.10
2"	S62000LNWG	2.900"	.280"	.240"	.500"	.10
2-1/2"	S62500LNWG	3.550"	.315"	.240"	.500"	.16
3"	S63000LNWG	4.190"	.315"	.240"	.500"	.18
4"	S64000LNWG	5.240"	.325"	.240"	.500"	.24

All dimensions are for informational purposes only *Tolerances +/- 5%