




411-0081-000 - Single-Phase Encapsulated

PRODUCT DETAILS			
KVA:	1.50	Enclosure:	NEMA 3R Encapsulated
UPC#:	14722	Phase:	Single-Phase
Line Voltage	240x480V	Load Voltage	120/240V
E/S Shielded:	No	Windings:	Copper
Temp. rise:	135°	Hertz:	60 Hz
Taps:	None	Approvals:	UL, CUL
WEIGHT AND DIMENSIONS			
Height(A):	12.50"	Width(B):	6.69"
Depth(C):	5.34"	Shipping Weight:	33 lbs
ADDITIONAL INFORMATION			
How to Buy: This item is normally available through our Stocking Representatives and Distributors. To find the nearest stocking location, click here .			

Wiring Diagram

S480A Wiring Diagram & Connections*

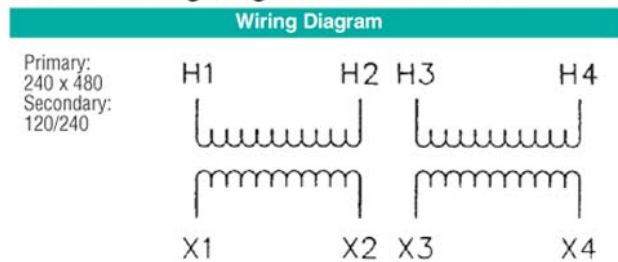

Connections		
Primary Volts	Interconnect	Primary Lines Connect To
480	H2 to H3	H1-H4
240	H1 to H3	H1-H4
	H2 to H4	
Sec. Volts	Interconnect	Secondary Lines Connect To
240	X2 to X3	X1-X4
120/240	X2 to X3	X1-X2-X4
120	X1 to X3	X1-X4
	X2 to X4	

Dimensional Drawing

