


VANGUARD START CAPACITORS

- Temperature range -40°C to 65°C
- Suitable for 50 or 60 Cycle
- Plastic case requires no insulation
- (2) 1/4" spade terminals per post
- UL Recognized

MOTOR START CAPACITORS

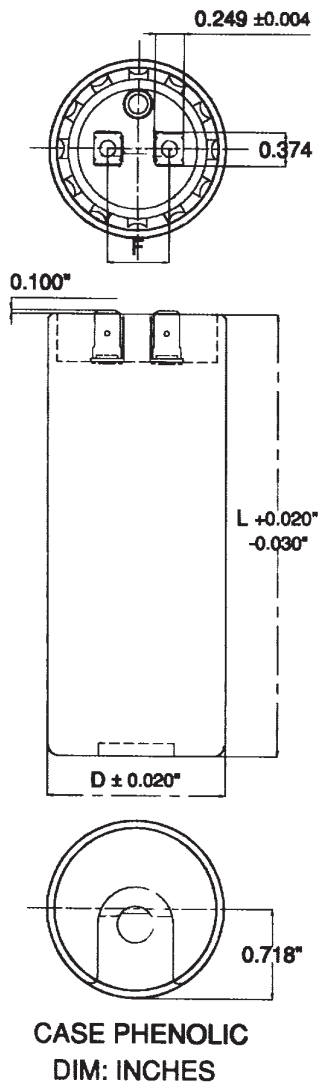

125 VOLT ROUND CASE

MFD	Part Number	Dia.	Height
21-25	BC-21	1 7/16"	2 3/4"
25-30	BC-25	1 7/16"	2 3/4"
30-36	BC-30	1 7/16"	2 3/4"
36-43	BC-36	1 7/16"	2 3/4"
43-53	BC-43	1 7/16"	2 3/4"
53-64	BC-56	1 7/16"	2 3/4"
64-77	BC-64	1 7/16"	2 3/4"
72-88	BC-75	1 7/16"	2 3/4"
88-108	BC-86	1 7/16"	2 3/4"
108-130	BC-108	1 7/16"	2 3/4"
124-149	BC-124	1 7/16"	2 3/4"
130-156	BC-130	1 7/16"	2 3/4"
145-175	BC-145	1 7/16"	2 3/4"
161-193	BC-161	1 7/16"	2 3/4"
189-227	BC-189	1 7/16"	2 3/4"
200-240	BC-200	1 7/16"	2 3/4"
216-259	BC-216	1 7/16"	2 3/4"
243-292	BC-243	1 7/16"	2 3/4"
270-324	BC-270	1 7/16"	2 3/4"
300-360	BC-300	1 7/16"	2 3/4"
324-388	BC-324	1 7/16"	2 3/4"
324-388	BC-324-S	1 13/16"	3 3/8"
334-401	SLF-6	1 7/16"	2 3/4"
340-408	BC-340	1 13/16"	3 3/8"
378-440	BC-378	1 13/16"	3 3/8"
400-480	BC-400	1 13/16"	3 3/8"
437-525	SLF-7	1 7/16"	3 3/8"
460-552	BC-460	1 13/16"	3 3/8"
540-648	BC-540	1 13/16"	4 3/8"
540-648	BC-540-S	1 13/16"	2 3/8"
590-708	BC-590	1 13/16"	4 3/8"
590-708	BC-590-S	1 7/16"	2 3/8"
708-849	BC-705	2 1/16"	4 3/8"
710-852	BC-705-S	1 13/16"	2 3/8"
829-994	BC-800	2 1/16"	4 3/8"
815-978	BC-815	1 13/16"	4 3/8"
1000-1200	BC-1000	2 1/16"	4 3/8"
1175-1400	BC-1175	2 1/16"	4 3/8"