
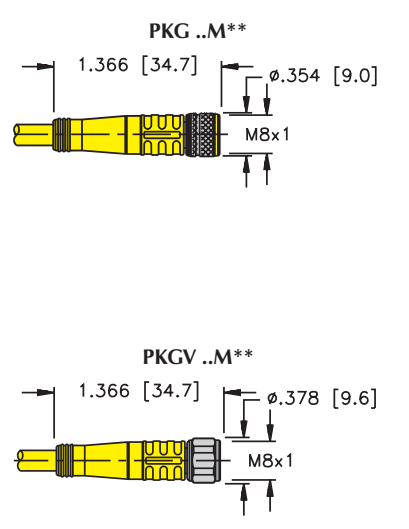


## 4-Wire *picofast*® Cordsets, Threaded Coupling Nut

- Straight Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 125 VAC/VDC, 2 A



Housing Style	Part Number	Cable	Features	Pinout	
 <p>PKG ..M**</p> <p>PKG ..M**</p>	PKG 4M-*	AWM PVC Yellow 4x26 AWG 105°C 4.4 mm OD Cable #RF50697-*M <sup>†</sup>	<i>flexlife</i> ®		
	PKG 4M-*/S90	AWM PUR Black 4x26 AWG 105°C 4.4 mm OD Cable #RF50586-*M <sup>†</sup>	<i>Cut/Abrasion Immune</i>		
	PKG 4M-*/S90/S101	AWM PUR Black 4x26 AWG 105°C 4.4 mm OD Cable #RF50935-*M <sup>†</sup>	<i>Cut/Abrasion Immune, flexlife-10, High Flex - Over 10 Million Cycles</i>		1. BN 2. WH 3. BU 4. BK
	PKG 4M-*/S90/S618	AWM PUR Black 4x26 AWG 105°C 4.4 mm OD Cable #RF50602-*M <sup>†</sup>	<i>Cut/Abrasion Immune, EMI/RFI Protection</i>		
	PKG 4M-*/S760	AWM PVC Black 4x26 AWG 105°C 4.4 mm OD Cable #RF50870-*M <sup>†</sup>	<i>flexlife</i>		
	PKG 4M-*/S90/S653	AWM PUR Black 3x24 AWG 105°C 4.4 mm OD Cable #RF50601-*M <sup>†</sup>	<i>Cut/Abrasion Immune, EMI/RFI Protection</i>		1. BN 2. Drain 3. BU 4. BK

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters.




\*\* Standard coupling material is nickel plated brass. "PKG..M"; "PKG..M" indicates 316 stainless steel.

† See Section N for *reelfast*® cable information.

4-Wire *picofast*® Cordsets, Threaded Coupling Nut

- Straight Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 125 VAC/VDC, 2 A

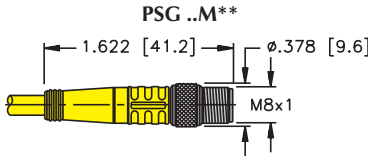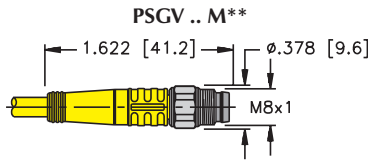

Housing Style	Part Number	Cable	Features	Pinout	
 	PSG 4M-*	AWM PVC Yellow 4x26 AWG 105° C 4.4 mm OD Cable #RF50697-*M <sup>†</sup>	<i>flexlife</i> ®		
	PSG 4M-*/S90	AWM PUR Black 4x26 AWG 105° C 4.4 mm OD Cable #RF50586-*M <sup>†</sup>	<i>Cut/Abrasion Immune</i>		
	PSG 4M-*/S90/S101	AWM PUR Black 4x26 AWG 105° C 4.4 mm OD Cable #RF50935-*M <sup>†</sup>	<i>Cut/Abrasion Immune, flexlife-10, High flex - over 10 million cycles</i>		1. BN 2. WH 3. BU 4. BK
	PSG 4M-*/S90/S618	AWM PUR Black 4x26 AWG 105° C 4.4 mm OD Cable #RF50602-*M <sup>†</sup>	<i>Cut/Abrasion Immune, EMI/RFI Protection</i>		
	PSG 4M-*/S760	AWM PVC Black 4x26 AWG 105° C 4.4 mm OD Cable #RF50870-*M <sup>†</sup>	<i>flexlife</i>		
	PSG 4M-*/S90/S653	AWM PUR Black 3x24 AWG 105° C 4.4 mm OD Cable #RF50601-*M <sup>†</sup>	<i>Cut/Abrasion Immune, EMI/RFI Protection</i>		1. BN 2. Drain 3. BU 4. BK

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters.

\*\* Standard coupling material is nickel plated brass. "PSG..M"; "PSGV..M" indicates 316 stainless steel.

† See Section N for *reelfast*® cable information.