


NEW ICT TRANSFORMERS



Industrial Control Transformers provide a low and safe control voltage for the operation of many electromagnetic devices

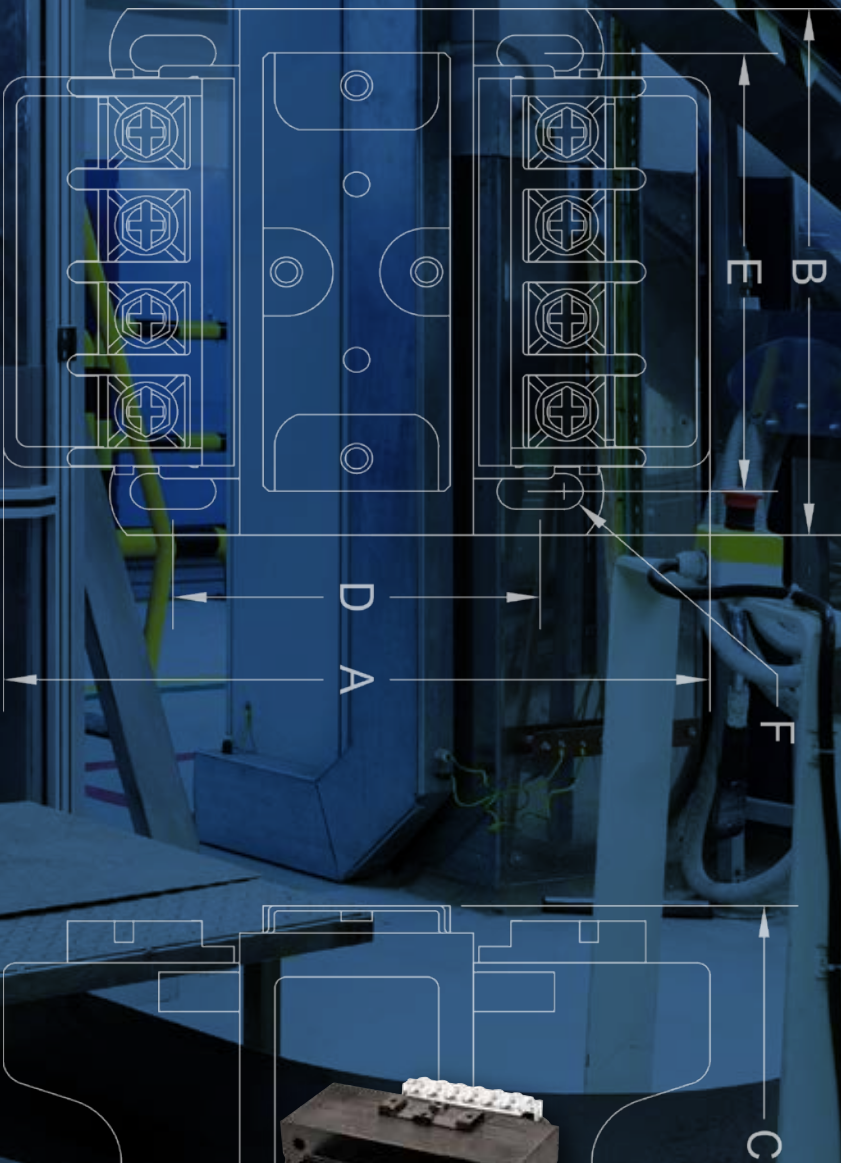

INDUSTRIAL CONTROL TRANSFORMERS

Industrial control transformers are used to reduce supply voltages to 240V or lower for the operation of electromagnetic devices such as contactors, solenoids, relays, and timers. They are especially designed to accommodate the momentary current inrush caused when electromagnetic components are energized without sacrificing secondary voltage stability beyond practical limits.

Acme Industrial Control Transformers are dry-type, step-down transformers with the secondary control circuit isolated from the primary line circuit to assure maximum safety.

Voltage regulation of Acme Industrial Control Transformers exceeds standards recommended by the National Electrical Manufacturers Association. Secondary circuit voltage drop between no-load and momentary overload remains exceptionally low. This excellent secondary circuit voltage regulation assures reliable operation of electromagnetic components and may permit the use of a smaller and less expensive industrial control transformer.

TB SERIES INDUSTRIAL CONTROL TRANSFORMER

Acme's TB Series Industrial Control Transformers are especially designed to accommodate the momentary current inrush caused when electromagnetic components are energized... without sacrificing secondary voltage stability beyond practical limits. The transformer's windings and internal terminations are sealed within an epoxy encapsulant encased in a durable thermoplastic end cap, protecting them from potentially damaging moisture, dirt and other ambient contaminants. Acme's TB Series transformers are dry-type, step-down transformers with the secondary control circuit isolated from the primary line circuit to assure maximum safety.

Voltage regulation of Acme's TB Series transformers exceeds standards recommended by the National Electrical Manufacturers Association. Secondary circuit voltage drop between no-load and momentary overload remains exceptionally low. This excellent secondary circuit voltage regulation assures reliable operation of electromagnetic components and may permit the use of a smaller and less expensive industrial control transformer.


Features

- 50 –5000 VA, 50/60 Hz.
- Epoxy encapsulated design protects core & coil assembly from potentially damaging contaminants
- Constructed with high quality silicon steel lamination to minimize core losses and increase efficiency
- Integrally molded terminal blocks with isolation barriers to prevent arc over
- Primary fuse blocks kits available and easily adaptable
- Secondary Fuse Clips factory installed, where applicable
- Series-parallel connecting links save wiring and labor costs
- Terminal blocks allow full access for ring terminals for easy installation even with solid strand conductors
- Copper windings on all groups
- Heavy gauge steel mounting plate adapts to various mounting dimensions
- Voltage regulation exceeds NEMA requirements
- UL Listed and CSA Certified or cUL
- Meets or exceeds UL, CSA, NEMA, ANSI and OSHA Standards
- **Twenty year limited warranty**
- **Assembled in the USA of imported and domestic components**

Applications

- Motor Starters
- Contactors
- Solenoids
- Timer Circuits
- Relays
- Control Panels
- Robotics



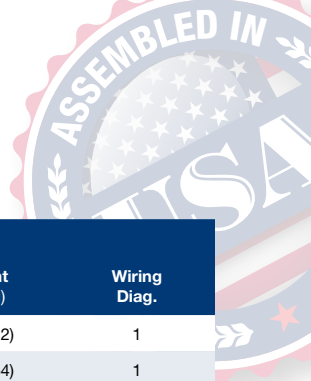

TB SERIES

Group A

120 X 240 PRIMARY VOLTS — 12/24 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A001①	3.78 (9.60)	3 (7.62)	3.14 (7.98)	1.96 (4.98)	2.5 (6.35)	2.7 (1.22)	1
75	TB75A001①	4 (10.16)	3 (7.62)	4.52 (11.47)	2.42 (6.15)	2.5 (6.35)	3.4 (1.54)	1
100	TB100A001①	4 (10.16)	3.38 (8.59)	4.84 (12.28)	2.42 (6.15)	2.81 (7.14)	4.4 (2.00)	1
150	TB150B001①	4.03 (10.24)	3.75 (9.53)	3.77 (9.58)	2.82 (7.16)	3.13 (7.95)	6 (2.72)	1
200	TB200B001①	4.38 (11.13)	4.5 (11.43)	5.78 (14.67)	2.42 (6.15)	3.75 (9.53)	8.9 (4.04)	1
250	TB250B001①	4.38 (11.13)	4.5 (11.43)	5.78 (14.67)	2.82 (7.16)	3.75 (9.53)	9.3 (4.22)	1
300	TB300B001②	4.75 (12.07)	4.5 (11.43)	3.98 (10.11)	3.18 (8.08)	3.75 (9.53)	11 (4.99)	1
350	TB350B001②	5 (12.7)	4.5 (11.43)	3.98 (10.11)	3.43 (8.71)	3.75 (9.53)	11.3 (5.13)	1
500	TB500B001②	5.45 (13.84)	5.25 (13.34)	4.64 (11.79)	3.87 (9.83)	4.38 (11.1)	18 (8.16)	1
750	TB750B001②	6.95 (17.65)	5.25 (13.34)	4.64 (11.79)	5.37 (13.64)	4.38 (11.13)	26.5 (12.02)	1

Group B

120 X 240 PRIMARY VOLTS — 120 X 240 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A003①	3.78 (9.60)	3 (7.62)	2.72 (6.91)	1.96 (4.98)	2.5 (6.35)	2.7 (1.22)	3
100	TB100A003①	4 (10.16)	3.38 (8.59)	3.03 (7.70)	2.42 (6.15)	2.81 (7.14)	4.4 (2.00)	3
150	TB150B003①	4.03 (10.24)	3.75 (9.53)	3.35 (8.51)	2.82 (7.16)	3.13 (7.95)	6 (2.72)	3
250	TB250B003①	4.38 (11.13)	4.5 (11.43)	3.97 (10.08)	2.82 (7.16)	3.75 (9.53)	9.3 (4.22)	3
350	TB350B003①	4.75 (12.07)	4.5 (11.43)	3.97 (10.08)	3.74 (9.50)	3.75 (9.53)	11.6 (5.26)	3
500	TB500B003①	6.11 (15.52)	5.25 (13.34)	4.63 (11.76)	3.87 (9.83)	4.38 (11.13)	17.4 (7.89)	3
750	TB750B003①	7.61 (19.33)	5.25 (13.34)	4.63 (11.76)	5.37 (13.64)	4.38 (11.13)	26.5 (12.02)	3

Group C

200, 208/220, 230, 240/440, 460, 480 PRIMARY VOLTS — 23, 24, 25/110, 115, 120 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A004C*①	4.53 (11.51)	3 (7.62)	3.14 (7.98)	2.82 (7.16)	2.5 (6.35)	4.3 (1.95)	4
75	TB75A004C*①	4.5 (11.43)	3.38 (8.59)	3.46 (8.79)	2.82 (7.16)	2.81 (7.14)	5.5 (2.49)	4
100	TB100A004C*①	4.53 (11.51)	3.75 (9.53)	3.78 (9.60)	2.99 (7.59)	3.13 (7.95)	6.5 (2.95)	4
150	TB150B004C*①	5.03 (12.78)	3.75 (9.53)	3.78 (9.60)	3.18 (8.08)	3.13 (7.95)	9.5 (4.31)	4
200	TB200B004C*①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.99 (7.59)	3.75 (9.53)	9.8 (4.45)	4
250	TB250B004C*①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.74 (9.50)	3.75 (9.53)	11.3 (5.13)	4
300	TB300B004C*①	6.11 (15.52)	5.25 (13.34)	5.14 (13.06)	3.87 (9.83)	4.38 (11.13)	14.1 (6.40)	4
350	TB350B004C*①	6.11 (15.52)	5.25 (13.34)	5.14 (13.06)	3.87 (9.83)	4.38 (11.13)	16.4 (7.44)	4
500	TB500B004C*①	7.11 (18.06)	5.25 (13.34)	5.14 (13.06)	5.37 (13.64)	4.38 (11.13)	23.1 (10.48)	4
750	TB750B004C*①	7.11 (18.06)	6.75 (17.15)	6.3 (16.00)	4.97 (12.62)	6.13 (15.57)	38.6 (17.51)	4
1000	TB1000B004C*②	8.13 (20.65)	6.75 (17.15)	5.73 (14.55)	6.13 (15.57)	6.13 (15.57)	48.4 (21.95)	4

*Secondary Fuse Clips Factory Installed



Group D

208/230/460 PRIMARY VOLTS — 115 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A005C* ^①	3.78 (9.60)	3 (7.62)	3.14 (7.98)	2.21 (5.61)	2.5 (6.35)	2.7 (1.22)	5
75	TB75A005C* ^①	4 (10.16)	3.38 (8.59)	3.46 (8.79)	2.42 (6.15)	2.81 (7.14)	3.4 (1.54)	5
100	TB100A005C* ^①	4 (10.16)	3.38 (8.59)	3.46 (8.79)	2.42 (6.15)	2.81 (7.14)	4.4 (2.00)	5
150	TB150B005C* ^①	4.03 (10.24)	3.75 (9.53)	3.77 (9.58)	2.82 (7.16)	3.13 (7.95)	5.6 (2.54)	5
200	TB200B005C* ^①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.82 (7.16)	3.75 (9.53)	9.1 (4.13)	5
250	TB250B005C* ^①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.18 (8.08)	3.75 (9.53)	10.8 (4.90)	5
300	TB300B005C* ^①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.74 (9.50)	3.75 (9.53)	11.2 (5.08)	5
350	TB350B005C* ^①	5.75 (14.61)	4.5 (11.43)	4.4 (11.18)	4.72 (11.99)	3.75 (9.53)	12.4 (5.62)	5
500	TB500B005C* ^①	6.11 (15.52)	5.25 (13.34)	5.14 (13.06)	4.37 (11.10)	4.38 (11.13)	17.4 (7.89)	5
750	TB750B005C* ^①	7.61 (19.33)	5.25 (13.34)	5.14 (13.06)	5.87 (14.91)	4.38 (11.13)	26.2 (11.88)	5
1000	TB1000B005C* ^②	7.45 (18.92)	6.75 (17.15)	5.42 (13.77)	5.06 (12.85)	5.31 (13.49)	37 (16.78)	5
1500	TB1500B005C* ^②	8.5 (21.59)	6.75 (17.15)	5.75 (14.61)	6.13 (15.57)	6.13 (15.57)	53.9 (24.45)	5
2000	TB2000F005C* ^②	8.13 (20.65)	6.75 (17.15)	6.28 (15.95)	5.25 (13.34)	6.13 (15.57)	51.6 (23.41)	5
3000	TB3000F005* ^②	8.5 (21.59)	9 (22.86)	7.5 (19.05)	5.74 (14.58)	7.5 (19.05)	77.1 (34.97)	5
5000	TB5000F005 ^②	10.31 (26.19)	9 (22.86)	7.5 (19.05)	7.56 (19.20)	7.5 (19.05)	114.6 (51.98)	5

*Secondary Fuse Clips Factory Installed

Group E

208, 277 PRIMARY VOLTS — 120 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A006C* ^①	3.78 (9.60)	3 (7.62)	3.14 (7.98)	1.96 (4.98)	2.5 (6.35)	2.7 (1.22)	6
75	TB75A006C* ^①	4 (10.16)	3 (7.62)	3.14 (7.98)	2.42 (6.15)	2.5 (6.35)	3.4 (1.54)	6
100	TB100A006C* ^①	4 (10.16)	3.38 (8.59)	3.46 (8.79)	2.42 (6.15)	2.81 (7.14)	4.4 (2.00)	6
150	TB150B006C* ^①	4.03 (10.24)	3.75 (9.53)	3.77 (9.58)	2.82 (7.16)	3.13 (7.95)	6 (2.72)	6
200	TB200B006C* ^①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.42 (6.15)	3.75 (9.53)	8.9 (4.04)	6
250	TB250B006C* ^①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.82 (7.16)	3.75 (9.53)	9.3 (4.22)	6
300	TB300B006C* ^①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.18 (8.08)	3.75 (9.53)	11 (4.99)	6
350	TB350B006C* ^①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.74 (9.50)	3.75 (9.53)	11.6 (5.26)	6
500	TB500B006C* ^①	6.11 (15.52)	5.25 (13.34)	5.14 (13.06)	3.87 (9.83)	4.38 (11.13)	17.4 (7.89)	6
750	TB750B006C* ^①	7.61 (19.33)	5.25 (13.34)	5.14 (13.06)	5.37 (13.64)	4.38 (11.13)	26.5 (12.02)	6

*Secondary Fuse Clips Factory Installed





Group F

208/500, 220/380/440/550, 230/400/460/575, 240/416/480/600 — PRIMARY VOLTS
85/100/110, 91/110/120, 95/115/125, 99/120/130 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A007C*②	3.44 (8.74)	3.88 (9.86)	3.38 (8.59)	2.42 (6.15)	2.81 (7.14)	4 (1.81)	7
100	TB100A007C*②	4 (10.16)	3.75 (9.53)	3.62 (9.19)	2.99 (7.59)	3.13 (7.95)	6.8 (3.08)	7
150	TB150B007C*②	4 (10.16)	4.5 (11.43)	4.11 (10.44)	2.82 (7.16)	3.75 (9.53)	7.9 (3.58)	7
250	TB250B007C*②	5.75 (14.61)	4.5 (11.43)	4.11 (10.44)	4.72 (11.99)	3.75 (9.53)	10 (4.54)	7
350	TB350B007C*②	5.69 (14.45)	5.25 (13.34)	4.64 (11.79)	4.37 (11.10)	4.38 (11.13)	13.6 (6.17)	7
500	TB500B007C*②	7.19 (18.26)	5.25 (13.34)	4.95 (12.57)	5.87 (14.91)	4.38 (11.13)	18.2 (8.26)	7
750	TB750B007C*②	6.44 (16.36)	6.75 (17.15)	5.73 (14.55)	4.25 (10.80)	6.13 (15.57)	30.7 (13.93)	7

*Secondary Fuse Clips Factory Installed

Group G

220, 230, 240 X 440, 460, 480 PRIMARY VOLTS — 110/115/120 SECONDARY VOLTS —1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A008C*①	3.78 (9.60)	3 (7.62)	3.14 (7.98)	1.96 (4.98)	2.5 (6.35)	2.7 (1.22)	8
75	TB75A008C*①	4 (10.16)	3 (7.62)	3.14 (7.98)	2.42 (6.15)	2.5 (6.35)	3.4 (1.54)	8
100	TB100A008C*①	4 (10.16)	3.38 (8.59)	3.46 (8.79)	2.42 (6.15)	2.81 (7.14)	4.4 (2.00)	8
150	TB150B008C*①	4.03 (10.24)	3.75 (9.53)	3.77 (9.58)	2.82 (7.16)	3.13 (7.95)	6 (2.72)	8
200	TB200B008C*①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.42 (6.15)	3.75 (9.53)	8.9 (4.04)	8
250	TB250B008C*①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.82 (7.16)	3.75 (9.53)	9.3 (4.22)	8
300	TB300B008C*①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.18 (8.08)	3.75 (9.53)	11 (4.99)	8
350	TB350B008C*①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.74 (9.50)	3.75 (9.53)	11.6 (5.26)	8
500	TB500B008C*①	6.11 (15.52)	5.25 (13.34)	5.14 (13.06)	3.87 (9.83)	4.38 (11.13)	17.4 (7.89)	8
750	TB750B008C*①	7.61 (19.33)	5.25 (13.34)	5.14 (13.06)	5.37 (13.64)	4.38 (11.13)	26.5 (12.02)	8
1000	TB1000B008C*①	6.11 (15.52)	6.75 (17.15)	6.3 (16.00)	3.91 (9.93)	6.13 (15.57)	31 (14.06)	8
1500	TB1500B008C*①	8.11 (20.60)	6.75 (17.15)	6.32 (16.05)	6.13 (15.57)	6.13 (15.57)	51.58 (23.40)	8
2000	TB2000F008C*②	7.75 (19.69)	6.75 (17.15)	6.28 (15.95)	6.13 (15.57)	6.13 (15.57)	46.1 (20.91)	8
3000	TB3000F008②	8 (20.32)	9 (22.86)	7.5 (19.05)	5.24 (13.31)	7.5 (19.05)	68.8 (31.21)	8
5000	TB5000F008②	10 (25.4)	9 (22.86)	7.5 (19.05)	7.18 (18.24)	7.5 (19.05)	109.4 (49.62)	8

*Secondary Fuse Clips Factory Installed



Group H

230, 460, 575 PRIMARY VOLTS — 95, 115 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A011①	4.03 (10.24)	3 (7.62)	2.72 (6.9088)	2.21 (5.61)	2.5 (6.35)	3.2 (1.45)	11
75	TB75A011①	4.03 (10.24)	3.38 (8.59)	3.04 (7.72)	2.42 (6.15)	2.81 (7.14)	4.2 (1.91)	11
100	TB100A011①	4.5 (11.43)	3.38 (8.59)	3.04 (7.72)	2.82 (7.16)	2.81 (7.14)	5.5 (2.49)	11
150	TB150B011①	4.53 (11.51)	3.75 (9.53)	3.36 (8.53)	3.18 (8.08)	3.13 (7.95)	7.7 (3.49)	11
200	TB200B011①	4.38 (11.13)	3.75 (9.53)	3.98 (10.11)	2.82 (7.16)	3.75 (9.53)	9.1 (4.13)	11
250	TB250B011①	4.38 (11.13)	4.5 (11.43)	3.98 (10.11)	3.18 (8.08)	3.75 (9.53)	9.5 (4.31)	11
300	TB300B011①	4.75 (12.07)	4.5 (11.43)	3.98 (10.11)	3.74 (9.50)	3.75 (9.53)	11.6 (5.26)	11
350	TB350B011①	5.61 (14.25)	5.25 (13.34)	4.63 (11.76)	3.37 (8.56)	4.38 (11.13)	13.8 (6.26)	11
500	TB500B011①	6.19 (15.72)	5.25 (13.34)	4.63 (11.76)	4.37 (11.10)	4.38 (11.13)	17.6 (7.98)	11
750	TB750B011①	8.11 (20.60)	5.25 (13.34)	4.63 (11.76)	5.87 (14.91)	4.38 (11.13)	29.9 (13.56)	11
1000	TB1000F011②	7 (17.78)	6.38 (16.21)	5.42 (13.77)	5.06 (12.85)	5.31 (13.49)	31.8 (14.42)	11
1500	TB1500F011②	7.45 (18.92)	6.75 (17.15)	6.29 (15.98)	5.25 (13.34)	6.13 (15.57)	44.2 (20.05)	11
2000	TB2000F011②	7.56 (19.20)	9 (22.86)	7.8 (19.81)	4.81 (12.22)	7.5 (19.05)	57.7 (26.17)	11
3000	TB3000F011②	8.69 (22.07)	9 (22.86)	7.5 (19.05)	5.93 (15.06)	7.5 (19.05)	83.6 (37.92)	11
5000	TB5000F011②	11 (27.94)	9 (22.86)	7.5 (19.05)	8.18 (20.78)	7.5 (19.05)	129.4 (58.69)	11

Group I

240, 347, 380 PRIMARY VOLTS — 120 X 240 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
1000	TB1000B012②	7.19 (18.26)	6.38 (16.21)	5.42 (13.77)	5.06 (12.85)	5.31 (13.49)	29 (13.15)	12
1500	TB1500F012②	8.13 (20.65)	6.38 (16.21)	5.44 (13.82)	5.06 (12.85)	5.31 (13.49)	33.3 (15.10)	12
2000	TB2000F012②	8.88 (22.56)	6.75 (17.15)	5.79 (14.71)	6.13 (15.57)	6.13 (15.57)	61.1 (27.71)	12
3000	TB3000F012②	8.5 (21.59)	9 (22.86)	7.62 (19.35)	5.68 (14.43)	7.5 (19.05)	80 (36.29)	12
5000	TB5000F012②	10.31 (26.19)	9 (22.86)	7.5 (19.05)	7.56 (19.20)	7.5 (19.05)	114.6 (51.98)	12


Group J

240 X 480 PRIMARY VOLTS — 24 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A013C*①	3.78 (9.60)	3 (7.62)	3.14 (7.98)	1.96 (4.98)	2.5 (6.35)	2.7 (1.22)	13
75	TB75A013C*①	4 (10.16)	3 (7.62)	3.14 (7.98)	2.42 (6.15)	2.5 (6.35)	3.4 (1.54)	13
100	TB100A013C*①	4 (10.16)	3.38 (8.59)	3.46 (8.79)	2.42 (6.15)	2.81 (7.14)	4.4 (2.00)	13
150	TB150B013C*①	4.03 (10.24)	3.75 (9.53)	3.77 (9.58)	2.82 (7.16)	3.13 (7.95)	6 (2.72)	13
200	TB200B013C*①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.42 (6.15)	3.75 (9.53)	8.9 (4.04)	13
250	TB250B013C*①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.82 (7.16)	3.75 (9.53)	9.3 (4.22)	13
300	TB300B013C*①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.18 (8.08)	3.75 (9.53)	11 (4.99)	13
350	TB350B013C*①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.74 (9.50)	3.75 (9.53)	11.6 (5.26)	13
500	TB500B013C*①	6.11 (15.52)	5.25 (13.34)	5.14 (13.06)	3.87 (9.83)	4.38 (11.13)	17.4 (7.89)	13
750	TB750B013C*①	7.61 (19.33)	5.25 (13.34)	5.14 (13.06)	5.37 (13.64)	4.38 (11.13)	26.5 (12.02)	13

*Secondary Fuse Clips Factory Installed



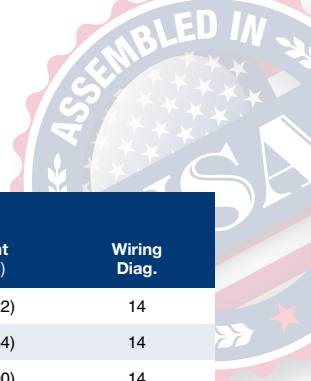

Group K

240 X 480 PRIMARY VOLTS — 120 X 240 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A014①	3.78 (9.60)	3 (7.62)	2.72 (6.9088)	1.96 (4.98)	2.5 (6.35)	2.7 (1.22)	14
75	TB75A014①	4 (10.16)	3 (7.62)	3.14 (7.98)	2.42 (6.15)	2.5 (6.35)	3.4 (1.54)	14
100	TB100A014①	4 (10.16)	3.38 (8.59)	3.03 (7.70)	2.42 (6.15)	2.81 (7.14)	4.4 (2.00)	14
150	TB150B014①	4.03 (10.24)	3.75 (9.53)	3.35 (8.51)	2.82 (7.16)	3.13 (7.95)	6 (2.72)	14
200	TB200B014①	4.38 (11.13)	4.5 (11.43)	3.97 (10.08)	2.42 (6.15)	3.75 (9.53)	8.9 (4.04)	14
250	TB250B014①	4.38 (11.13)	4.5 (11.43)	3.97 (10.08)	2.82 (7.16)	3.75 (9.53)	9.3 (4.22)	14
300	TB300B014①	4.75 (12.07)	4.5 (11.43)	3.97 (10.08)	3.43 (8.71)	3.75 (9.53)	11 (4.99)	14
350	TB350B014①	4.75 (12.07)	4.5 (11.43)	3.97 (10.08)	3.74 (9.50)	3.75 (9.53)	11.6 (5.26)	14
500	TB500B014①	6.11 (15.52)	5.25 (13.34)	4.63 (11.76)	3.87 (9.83)	4.38 (11.13)	17.4 (7.89)	14
750	TB750B014①	7.61 (19.33)	5.25 (13.34)	4.63 (11.76)	5.37 (13.64)	4.38 (11.13)	26.5 (12.02)	14
1000	TB1000B014②	7 (17.78)	5.25 (13.34)	4.48 (11.38)	5.37 (13.64)	4.38 (11.13)	28.8 (13.06)	14
1500	TB1500F014②	7 (17.78)	6.75 (17.15)	5.75 (14.61)	4.25 (10.80)	6.13 (15.57)	37 (16.78)	14
2000	TB2000F014②	7.75 (19.69)	6.75 (17.15)	5.73 (14.55)	4.97 (12.62)	6.13 (15.57)	46 (20.87)	14
3000	TB3000F014②	8 (20.32)	9 (22.86)	7.62 (19.35)	5.24 (13.31)	7.5 (19.05)	80 (36.29)	14
5000	TB5000F014②	10 (25.4)	9 (22.86)	7.5 (19.05)	7.18 (18.24)	7.5 (19.05)	114.6 (51.98)	14

Group L

380, 400, 415 PRIMARY VOLTS — 110 X 220 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A016①	3.78 (9.60)	3 (7.62)	3.14 (7.98)	1.96 (4.98)	2.5 (6.35)	2.7 (1.22)	16
75	TB75A016①	4 (10.16)	3 (7.62)	3.14 (7.98)	2.42 (6.15)	2.5 (6.35)	3.4 (1.54)	16
100	TB100A016①	4 (10.16)	3.38 (8.59)	3.46 (8.79)	2.42 (6.15)	2.81 (7.14)	4.4 (2.00)	16
150	TB150B016①	4.03 (10.24)	3.75 (9.53)	3.77 (9.58)	2.82 (7.16)	3.13 (7.95)	6 (2.72)	16
200	TB200B016①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.42 (6.15)	3.75 (9.53)	8.9 (4.04)	16
250	TB250B016①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.82 (7.16)	3.75 (9.53)	9.3 (4.22)	16
300	TB300B016①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.18 (8.08)	3.75 (9.53)	11 (4.99)	16
350	TB350B016①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.74 (9.50)	3.75 (9.53)	11.6 (5.26)	16
500	TB500B016①	6.11 (15.52)	5.25 (13.34)	5.14 (13.06)	3.87 (9.83)	4.38 (11.13)	17.4 (7.89)	16
750	TB750B016①	7.61 (19.33)	5.25 (13.34)	5.14 (13.06)	5.37 (13.64)	4.38 (11.13)	26.5 (12.02)	16



Group M

550/575/600 PRIMARY VOLTS — 110/115/120 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A017C*①	3.78 (9.60)	3 (7.62)	3.14 (7.98)	1.96 (4.98)	2.5 (6.35)	2.7 (1.22)	17
75	TB75A017C*①	4 (10.16)	3 (7.62)	3.14 (7.98)	2.42 (6.15)	2.5 (6.35)	3.4 (1.54)	17
100	TB100A017C*①	4 (10.16)	3.38 (8.59)	3.46 (8.79)	2.42 (6.15)	2.81 (7.14)	4.4 (2.00)	17
150	TB150B017C*①	4.03 (10.24)	3.75 (9.53)	3.77 (9.58)	2.82 (7.16)	3.13 (7.95)	6 (2.72)	17
200	TB200B017C*①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.42 (6.15)	3.75 (9.53)	8.9 (4.04)	17
250	TB250B017C*①	4.38 (11.13)	4.5 (11.43)	4.4 (11.18)	2.82 (7.16)	3.75 (9.53)	9.3 (4.22)	17
300	TB300B017C*①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.18 (8.08)	3.75 (9.53)	11 (4.99)	17
350	TB350B017C*①	4.75 (12.07)	4.5 (11.43)	4.4 (11.18)	3.74 (9.50)	3.75 (9.53)	11.6 (5.26)	17
500	TB500B017C*①	6.11 (15.52)	5.25 (13.34)	5.14 (13.06)	3.87 (9.83)	4.38 (11.13)	17.4 (7.89)	17
750	TB750B017C*①	7.61 (19.33)	5.25 (13.34)	5.14 (13.06)	5.37 (13.64)	4.38 (11.13)	26.5 (12.02)	17

*Secondary Fuse Clips Factory Installed

Group N

690 PRIMARY VOLTS — 120 X 240 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	TB50A018*	3.78 (9.60)	3 (7.62)	2.95 (7.49)	1.96 (4.98)	2.5 (6.35)	2.7 (1.22)	18
100	TB100A018*	4 (10.16)	3.38 (8.59)	3.27 (8.31)	2.42 (6.15)	2.81 (7.14)	4.1 (1.86)	18
150	TB150B018*	4.03 (10.24)	3.75 (9.53)	3.57 (9.07)	2.42 (6.15)	3.13 (7.95)	5.1 (2.31)	18
250	TB250B018*	4.37 (11.10)	4.5 (11.43)	4.2 (10.67)	2.82 (7.16)	3.75 (9.53)	8.8 (3.99)	18
350	TB350B018*	4.74 (12.04)	4.5 (11.43)	4.18 (10.62)	3.18 (8.08)	3.75 (9.53)	10.9 (4.94)	18
500	TB500B018*	6.11 (15.52)	5.25 (13.34)	4.94 (12.55)	3.87 (9.83)	4.38 (11.13)	16.2 (7.35)	18
750	TB750B018*	7.61 (19.33)	5.25 (13.34)	4.94 (12.55)	5.37 (13.64)	4.38 (11.13)	24.9 (11.29)	18

*Non UL, Non CSA

INTEGRALLY MOUNTED FUSE BLOCKS

Add Suffix to Catalog Number	Configuration
F2	Factory installed integrally mounted 2-pole primary block
F4	Factory installed 2-pole primary block and secondary fuse clips (50 & 75 VA)

Consult Technical Service for available models

TB SERIES PROTECTIVE DEVICES — Primary Fuse Kits, Terminal Covers

FUSES ARE NOT INCLUDED. CONSULT CATALOG FOR PROPER FUSE SELECTION

Catalog Number	Approximate Ship Weight (Lbs.)(Kg.)
PL112800*	4 Terminal cover (10 pack)
PL112801*	6 Terminal cover (10 pack)
PL112802*	Pri. Fuse Block Cover (10 pack)
PL112803*	Field install Pri. Fuse kit

*Parts not covered under (Assembled in USA)



CE SERIES INDUSTRIAL CONTROL TRANSFORMERS FOR GLOBAL APPLICATIONS



The Acme Electric CE Series Industrial Control Transformers are designed specifically for machine tool control circuit applications. These transformers have the ability to handle potentially damaging high in-rush currents that occur when electromagnetic components are energized, without sacrificing the required stable output voltage. Designed to meet or exceed the demands of international standards, combined with the full breadth of product offering, the CE Series Transformers from Acme Electric are the ideal solution for your industrial control applications. Acme's CE Series Encapsulated Industrial Control Transformers carry the CE mark, indicating it complies with the requirements established by the International Electro technical Commission (IEC) for use of control circuit transformers in the countries of the European Union. Regulations that apply to control transformers include Low Voltage Directive 2006/95/EC and Electromagnetic Compatibility (EMC) Directive 2004/108/EC

Cooler. Cleaner. More Compact.

The CE Series design improves the dissipation of the heat away from the core and coil assembly providing cooler operation. In addition, the CE Series industrial control transformers seal the transformer's windings and internal terminations within an epoxy encapsulant encased in a durable thermoplastic end cap, protecting them from potentially damaging moisture, dirt and other ambient contaminants. Furthermore, Acme's compact design helps minimize the mounting footprint, providing more flexibility in applications where space is at a premium.

Features

- 50 -5000 VA, 50/60 Hz
- Epoxy encapsulated design protects core & coil assembly from potentially damaging contaminants
- Integrally molded terminal blocks with isolation barriers to prevent arc over
- Terminal blocks allow full access for ring terminals for easy installation and solid termination
- Heavy gauge steel mounting feet
- UL Listed, and CSA approved, CE Marked (EN61558-2-2)
- **Twenty-year limited Warranty**
- **Assembled in the USA of imported and domestic components**



CE SERIES

Group O

120 X 240 PRIMARY VOLTS — 24 SECONDARY VOLTS — 1Ø 50/60 Hz



VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	CE50A002	3.38 (8.59)	3 (7.62)	3 (7.62)	2.21 (5.61)	2.5 (6.35)	3.4 (1.54)	2
75	CE75A002	3.38 (8.59)	3.38 (8.59)	3.25 (8.26)	2.21 (5.61)	2.81 (7.14)	4.2 (1.91)	2
100	CE100A002	3.38 (8.59)	3.75 (9.53)	3.5 (8.89)	2.42 (6.15)	3.13 (7.95)	5.9 (2.68)	2
150	CE150B002	4 (10.16)	4.5 (11.43)	4 (10.16)	2.42 (6.15)	3.75 (9.53)	8.5 (3.86)	2
200	CE200B002	4 (10.16)	4.5 (11.43)	4 (10.16)	2.82 (7.16)	3.75 (9.53)	10 (4.54)	2
250	CE250B002	4 (10.16)	4.5 (11.43)	4 (10.16)	3.18 (8.08)	3.75 (9.53)	11 (4.99)	2
300	CE300B002	4.38 (11.13)	4.5 (11.43)	4 (10.16)	3.74 (9.50)	3.75 (9.53)	13.2 (5.99)	2
350	CE350B002	4.5 (11.43)	5.25 (13.34)	4.5 (11.43)	3.37 (8.56)	4.38 (11.13)	14.9 (6.76)	2
500	CE500B002	5.13 (13.03)	5.25 (13.34)	4.5 (11.43)	3.87 (9.83)	4.38 (11.13)	19.2 (8.71)	2
750	CE750B002	7 (17.78)	5.25 (13.34)	5 (12.70)	5.87 (14.91)	4.38 (11.13)	28.1 (12.75)	2
1000	CE1000B002	7 (17.78)	6.38 (16.21)	5.42 (13.77)	3.75 (9.53)	5.31 (13.49)	31.8 (14.42)	2



Group P

200, 208/220, 230, 240/440, 460, 480 PRIMARY VOLTS — 23, 24, 25/110, 115, 120 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	CE50A004	3.38 (8.59)	3 (7.62)	3.25 (8.26)	2.21 (5.61)	2.81 (7.14)	4.2 (1.91)	4
75	CE75A004	3.38 (8.59)	3.38 (8.59)	3.5 (8.89)	2.42 (6.15)	3.13 (7.95)	5.9 (2.68)	4
100	CE100A004	3.63 (9.22)	3.75 (9.53)	3.5 (8.89)	3.18 (8.08)	3.13 (7.95)	7.9 (3.58)	4
150	CE150B004	3.75 (9.53)	4.5 (11.43)	4 (10.16)	2.82 (7.16)	3.75 (9.53)	10 (4.54)	4
200	CE200B004	4.38 (11.13)	4.5 (11.43)	4 (10.16)	3.43 (8.71)	3.75 (9.53)	12.8 (5.81)	4
250	CE250B004	4.75 (12.07)	4.5 (11.43)	4 (10.16)	3.74 (9.50)	3.75 (9.53)	14 (6.35)	4
300	CE300B004	4.88 (12.40)	5.25 (13.34)	4.5 (11.43)	3.87 (9.83)	4.38 (11.13)	16.8 (7.62)	4
350	CE350B004	4.88 (12.40)	5.25 (13.34)	4.5 (11.43)	3.87 (9.83)	4.38 (11.13)	19.2 (8.71)	4
500	CE500B004	5.63 (14.30)	5.25 (13.34)	4.6 (11.68)	5.87 (14.91)	4.38 (11.13)	29 (13.15)	4
750	CE750B004	6.75 (17.15)	6.38 (16.21)	5.56 (14.12)	5.06 (12.85)	5.31 (13.49)	29.8 (13.52)	4
1000	CE1000F004	7.06 (17.93)	6.38 (16.21)	6 (15.24)	5.06 (12.85)	5.31 (13.49)	30.2 (13.70)	4

Group Q

**208/500, 220/380/440/550, 230/400/460/575, 240/416/480/600 PRIMARY VOLTS
85/100/110, 91/110/120, 95/115/125, 99/120/130 SECONDARY VOLTS — 1Ø 50/60 Hz**

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
250	CE250B007	4.25 (10.80)	4.5 (11.43)	4 (10.16)	3.43 (8.71)	3.75 (9.53)	11.4 (5.17)	7
300	CE300B007	4.75 (12.07)	4.5 (11.43)	4 (10.16)	3.74 (9.50)	3.75 (9.53)	13.6 (6.17)	7
350	CE350B007	5.25 (13.34)	4.5 (11.43)	4.11 (10.44)	3.74 (9.50)	3.75 (9.53)	14.2 (6.44)	7
500	CE500B007	5.5 (13.97)	5.25 (13.34)	4.66 (11.84)	3.87 (9.83)	4.38 (11.13)	17.4 (7.89)	7
750	CE750B007	7.38 (18.75)	5.25 (13.34)	4.75 (12.07)	5.87 (14.91)	4.38 (11.13)	27.5 (12.47)	7
1000	CE1000F007	7 (17.78)	6.38 (16.21)	5.5 (13.97)	5.06 (12.85)	5.31 (13.49)	27.9 (12.66)	7
1500	CE1500F007	7.75 (19.69)	6.75 (17.15)	6 (15.24)	4.97 (12.62)	6.13 (15.57)	43.1 (19.55)	7
2000	CE2000F007	7.63 (19.38)	9 (22.86)	8 (20.32)	4.81 (12.22)	7.5 (19.05)	56 (25.40)	7
3000	CE3000F007	8.56 (21.74)	9 (22.86)	7.63 (19.38)	5.74 (14.58)	7.5 (19.05)	76.2 (34.56)	7





Group R

220 X 440, 230 X 460, 240 X 480 PRIMARY VOLTS — 110/115/120 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	CE50A008	3.38 (8.59)	3 (7.62)	3 (7.62)	2.42 (6.15)	2.5 (6.35)	3.4 (1.54)	8
75	CE75A008	3.46 (8.79)	3.38 (8.59)	3.25 (8.26)	2.42 (6.15)	2.81 (7.14)	4.8 (2.18)	8
100	CE100A008	3.38 (8.59)	3.75 (9.53)	3.5 (8.89)	2.42 (6.15)	3.13 (7.95)	5.9 (2.68)	8
150	CE150B008	3.75 (9.53)	4.5 (11.43)	4 (10.16)	2.42 (6.15)	3.75 (9.53)	8.5 (3.86)	8
200	CE200B008	3.75 (9.53)	4.5 (11.43)	4 (10.16)	2.82 (7.16)	3.75 (9.53)	10 (4.54)	8
250	CE250B008	4 (10.16)	4.5 (11.43)	4 (10.16)	3.18 (8.08)	3.75 (9.53)	11 (4.99)	8
300	CE300B008	4.38 (11.13)	4.5 (11.43)	4 (10.16)	3.74 (9.50)	3.75 (9.53)	13 (5.90)	8
350	CE350B008	4.95 (12.57)	5.25 (13.34)	4.5 (11.43)	3.37 (8.56)	4.38 (11.13)	15 (6.80)	8
500	CE500B008	5.43 (13.79)	5.25 (13.34)	4.5 (11.43)	4.37 (11.10)	4.38 (11.13)	20 (9.07)	8
750	CE750B008	7 (17.78)	5.25 (13.34)	5 (12.70)	5.87 (14.91)	4.38 (11.13)	29.8 (13.52)	8
1000	CE1000F008	6.63 (16.84)	6.38 (16.21)	5.5 (13.97)	3.75 (9.53)	5.31 (13.49)	35 (15.88)	8
1500	CE1500F008	7.31 (18.57)	6.75 (17.15)	6 (15.24)	4.97 (12.62)	6.13 (15.57)	40 (18.14)	8
2000	CE2000F008	8.13 (20.65)	6.75 (17.15)	6 (15.24)	4.97 (12.62)	6.13 (15.57)	45 (20.41)	8
3000	CE3000F008	8.06 (20.47)	9 (22.86)	8 (20.32)	5.24 (13.31)	7.5 (19.05)	65.2 (29.57)	8
5000	CE5000F008	10 (25.4)	9 (22.86)	8 (20.32)	7.18 (18.24)	7.5 (19.05)	104.8 (47.54)	8

Group S

220, 230, 240/380, 400, 416/440, 460, 480/550, 575,600 PRIMARY VOLTS — 23, 24, 25/110, 115, 120 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
250	CE250B009	4.75 (12.07)	4.5 (11.43)	4 (10.16)	3.72 (9.45)	3.75 (9.53)	14.3 (6.49)	9
300	CE300B009	5 (12.7)	4.5 (11.43)	4 (10.16)	4.72 (11.99)	3.75 (9.53)	15.8 (7.17)	9
350	CE350B009	5.19 (13.18)	5.25 (13.34)	4.5 (11.43)	3.87 (9.83)	4.38 (11.13)	146.5 (66.45)	9
500	CE500B009	6.19 (15.72)	5.25 (13.34)	4.5 (11.43)	4.87 (12.37)	4.38 (11.13)	20.5 (9.30)	9
750	CE750B009	7 (17.78)	6.38 (16.21)	5.56 (14.12)	5.06 (12.85)	5.31 (13.49)	28.8 (13.06)	9
1000	CE1000F009	8.13 (20.65)	6.38 (16.21)	6 (15.24)	5.06 (12.85)	5.31 (13.49)	34.9 (15.83)	9

Group T

250VA-1KVA 208/230/400/460/575 PRIMARY VOLTS — 24/115/230 SECONDARY VOLTS — 1Ø 50/60 Hz

1.5KVA-5KVA 208/230/400/460/575 PRIMARY VOLTS — 115/230 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
250	CE250B010	4.75 (12.07)	4.5 (11.43)	4 (10.16)	4.72 (11.99)	3.75 (9.53)	14.9 (6.76)	10
300	CE300B010	5.25 (13.34)	4.5 (11.43)	4 (10.16)	4.72 (11.99)	3.75 (9.53)	17.4 (7.89)	10
350	CE350B010	5.6 (14.22)	5.25 (13.34)	4.5 (11.43)	4.37 (11.10)	4.38 (11.13)	17.8 (8.07)	10
500	CE500B010	7.19 (18.26)	5.25 (13.34)	4.75 (12.07)	5.87 (14.91)	4.38 (11.13)	26.6 (12.07)	10
750	CE750B010	7.44 (18.90)	6.38 (16.21)	5.56 (14.12)	5.06 (12.85)	5.31 (13.49)	32.5 (14.74)	10
1000	CE1000F010	7.75 (19.69)	6.75 (17.15)	6.25 (15.88)	5.25 (13.34)	6.13 (15.57)	44 (19.96)	10
1500	CE1500F010 *	7.75 (19.69)	6.75 (17.15)	6 (15.24)	4.97 (12.62)	6.13 (15.57)	45.4 (20.59)	10A
2000	CE2000F010 *	7.63 (19.38)	9 (22.86)	7.63 (19.38)	4.81 (12.22)	7.5 (19.05)	58.6 (26.58)	10A
3000	CE3000F010 *	8.75 (22.23)	9 (22.86)	7.63 (19.38)	5.93 (15.06)	7.5 (19.05)	92.9 (42.14)	10A
5000	CE5000F010 *	10.31 (26.19)	9 (22.86)	7.63 (19.38)	7.62 (19.35)	7.5 (19.05)	127.4 (57.79)	10A

* Secondary 115/230 only



Group U

240 X 480 PRIMARY VOLTS — 24 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	CE50A013	3.38 (8.59)	3 (7.62)	3 (7.62)	2.21 (5.61)	2.5 (6.35)	3.4 (1.54)	13
75	CE75A013	3.38 (8.59)	3.38 (8.59)	3.25 (8.26)	2.21 (5.61)	2.81 (7.14)	4.2 (1.91)	13
100	CE100A013	3.38 (8.59)	3.75 (9.53)	3.5 (8.89)	2.42 (6.15)	3.13 (7.95)	5.9 (2.68)	13
150	CE150B013	4 (10.16)	4.5 (11.43)	4 (10.16)	2.42 (6.15)	3.75 (9.53)	8.5 (3.86)	13
200	CE200B013	4 (10.16)	4.5 (11.43)	4 (10.16)	2.42 (6.15)	4.5 (11.43)	10 (4.54)	13
250	CE250B013	4 (10.16)	4.5 (11.43)	4 (10.16)	3.18 (8.08)	4.5 (11.43)	11 (4.99)	13
300	CE300B013	4.38 (11.13)	4.5 (11.43)	4 (10.16)	3.74 (9.50)	3.75 (9.53)	13.2 (5.99)	13
350	CE350B013	4.5 (11.43)	5.25 (13.34)	4.5 (11.43)	3.37 (8.56)	4.38 (11.13)	14.9 (6.76)	13
500	CE500B013	5.13 (13.03)	5.25 (13.34)	4.5 (11.43)	3.87 (9.83)	4.38 (11.13)	19.2 (8.71)	13
750	CE750B013	7 (17.78)	5.25 (13.34)	5 (12.70)	5.37 (13.64)	4.38 (11.13)	28.1 (12.75)	13
1000	CE1000B013	7 (17.78)	6.38 (16.21)	5.42 (13.77)	3.75 (9.53)	5.31 (13.49)	31.8 (14.42)	13

Group V

380 PRIMARY VOLTS — 24 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	CE50A015	3.38 (8.59)	3 (7.62)	3 (7.62)	2.21 (5.61)	2.5 (6.35)	3.5 (1.59)	15
75	CE75A015	3.46 (8.79)	3.38 (8.59)	3.25 (8.26)	2.21 (5.61)	2.81 (7.14)	4.2 (1.91)	15
100	CE100A015	3.38 (8.59)	3.75 (9.53)	3.5 (8.89)	2.42 (6.15)	3.13 (7.95)	5.9 (2.68)	15
150	CE150B015	3.63 (9.22)	3.75 (9.53)	3.5 (8.89)	2.99 (7.59)	3.13 (7.95)	8.5 (3.86)	15
200	CE200B015	3.75 (9.53)	4.5 (11.43)	4 (10.16)	2.82 (7.16)	3.75 (9.53)	10 (4.54)	15
250	CE250B015	4 (10.16)	4.5 (11.43)	4 (10.16)	3.18 (8.08)	3.75 (9.53)	11 (4.99)	15
300	CE300B015	4.38 (11.13)	4.5 (11.43)	4 (10.16)	3.74 (9.50)	3.75 (9.53)	13.2 (5.99)	15
350	CE350B015	4.5 (11.43)	5.25 (13.34)	4.5 (11.43)	3.87 (9.83)	4.38 (11.13)	14.9 (6.76)	15
500	CE500B015	5.13 (13.03)	5.25 (13.34)	4.5 (11.43)	3.87 (9.83)	4.38 (11.13)	19.2 (8.71)	15
750	CE750B015	7 (17.78)	5.25 (13.34)	5 (12.70)	5.87 (14.91)	4.38 (11.13)	28.1 (12.75)	15

Group W


380, 400, 415 PRIMARY VOLTS — 110 X 220 SECONDARY VOLTS — 1Ø 50/60 Hz

VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	CE50A016	3.38 (8.59)	3 (7.62)	3 (7.62)	2.42 (6.15)	2.5 (6.35)	3.4 (1.54)	16
75	CE75A016	3.46 (8.79)	3.38 (8.59)	3.25 (8.26)	2.42 (6.15)	2.81 (7.14)	4.8 (2.18)	16
100	CE100A016	3.38 (8.59)	3.75 (9.53)	3.5 (8.89)	2.42 (6.15)	3.13 (7.95)	5.9 (2.68)	16
150	CE150B016	3.75 (9.53)	4.5 (11.43)	4 (10.16)	2.42 (6.15)	3.75 (9.53)	8.5 (3.86)	16
200	CE200B016	3.75 (9.53)	4.5 (11.43)	4 (10.16)	2.99 (7.59)	3.75 (9.53)	10 (4.54)	16
250	CE250B016	4 (10.16)	4.5 (11.43)	4 (10.16)	3.18 (8.08)	3.75 (9.53)	11 (4.99)	16
300	CE300B016	4.38 (11.13)	4.5 (11.43)	4 (10.16)	3.74 (9.50)	3.75 (9.53)	13 (5.90)	16
350	CE350B016	4.75 (12.07)	4.5 (11.43)	4 (10.16)	3.74 (9.50)	3.75 (9.53)	15 (6.80)	16
500	CE500B016	5.13 (13.03)	5.25 (13.34)	4.5 (11.43)	4.37 (11.10)	4.38 (11.13)	20 (9.07)	16
750	CE750B016	7 (17.78)	5.25 (13.34)	4.5 (11.43)	5.87 (14.91)	4.38 (11.13)	27 (12.25)	16




Group X

550/575/600 PRIMARY VOLTS — 110/115/120 SECONDARY VOLTS — 1Ø 50/60 Hz

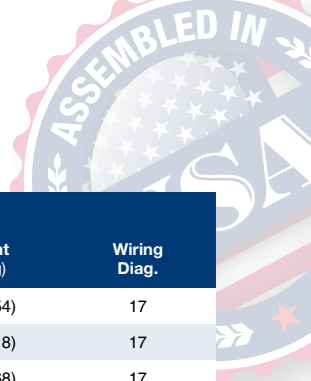



VA Rating	Catalog Number	Dimensions (inches)(cm)					Weight (lb)(kg)	Wiring Diag.
		A	B	C	D	E		
50	CE50A017	3.38 (8.59)	3 (7.62)	3 (7.62)	2.42 (6.15)	2.5 (6.35)	3.4 (1.54)	17
75	CE75A017	3.38 (8.59)	3.38 (8.59)	3.25 (8.26)	2.42 (6.15)	2.81 (7.14)	4.8 (2.18)	17
100	CE100A017	3.38 (8.59)	3.75 (9.53)	3.5 (8.89)	2.42 (6.15)	3.13 (7.95)	5.9 (2.68)	17
150	CE150B017	3.75 (9.53)	4.5 (11.43)	4 (10.16)	2.42 (6.15)	3.75 (9.53)	8.5 (3.86)	17
200	CE200B017	3.75 (9.53)	4.5 (11.43)	4 (10.16)	2.99 (7.59)	3.75 (9.53)	10 (4.54)	17
250	CE250B017	4 (10.16)	4.5 (11.43)	4 (10.16)	3.18 (8.08)	3.75 (9.53)	11 (4.99)	17
300	CE300B017	4.38 (11.13)	4.5 (11.43)	4 (10.16)	3.74 (9.50)	3.75 (9.53)	13 (5.90)	17
350	CE350B017	4.5 (11.43)	5.25 (13.34)	4.5 (11.43)	3.37 (8.56)	4.38 (11.13)	15 (6.80)	17
500	CE500B017	5.13 (13.03)	5.25 (13.34)	4.5 (11.43)	4.37 (11.10)	4.38 (11.13)	20 (9.07)	17
750	CE750B017	7 (17.78)	5.25 (13.34)	4.5 (11.43)	5.37 (13.64)	4.38 (11.13)	28 (12.70)	17

TB/CE SERIES DIMENSIONAL DRAWING

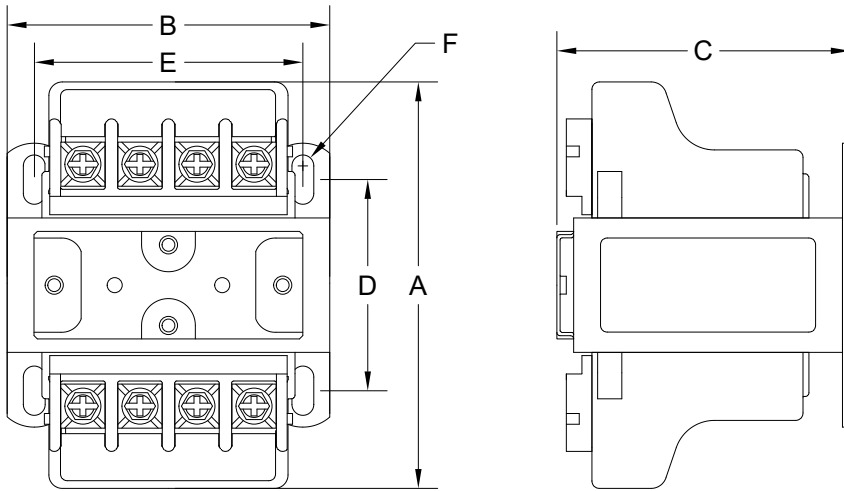

TB/CE SERIES WIRING DIAGRAMS

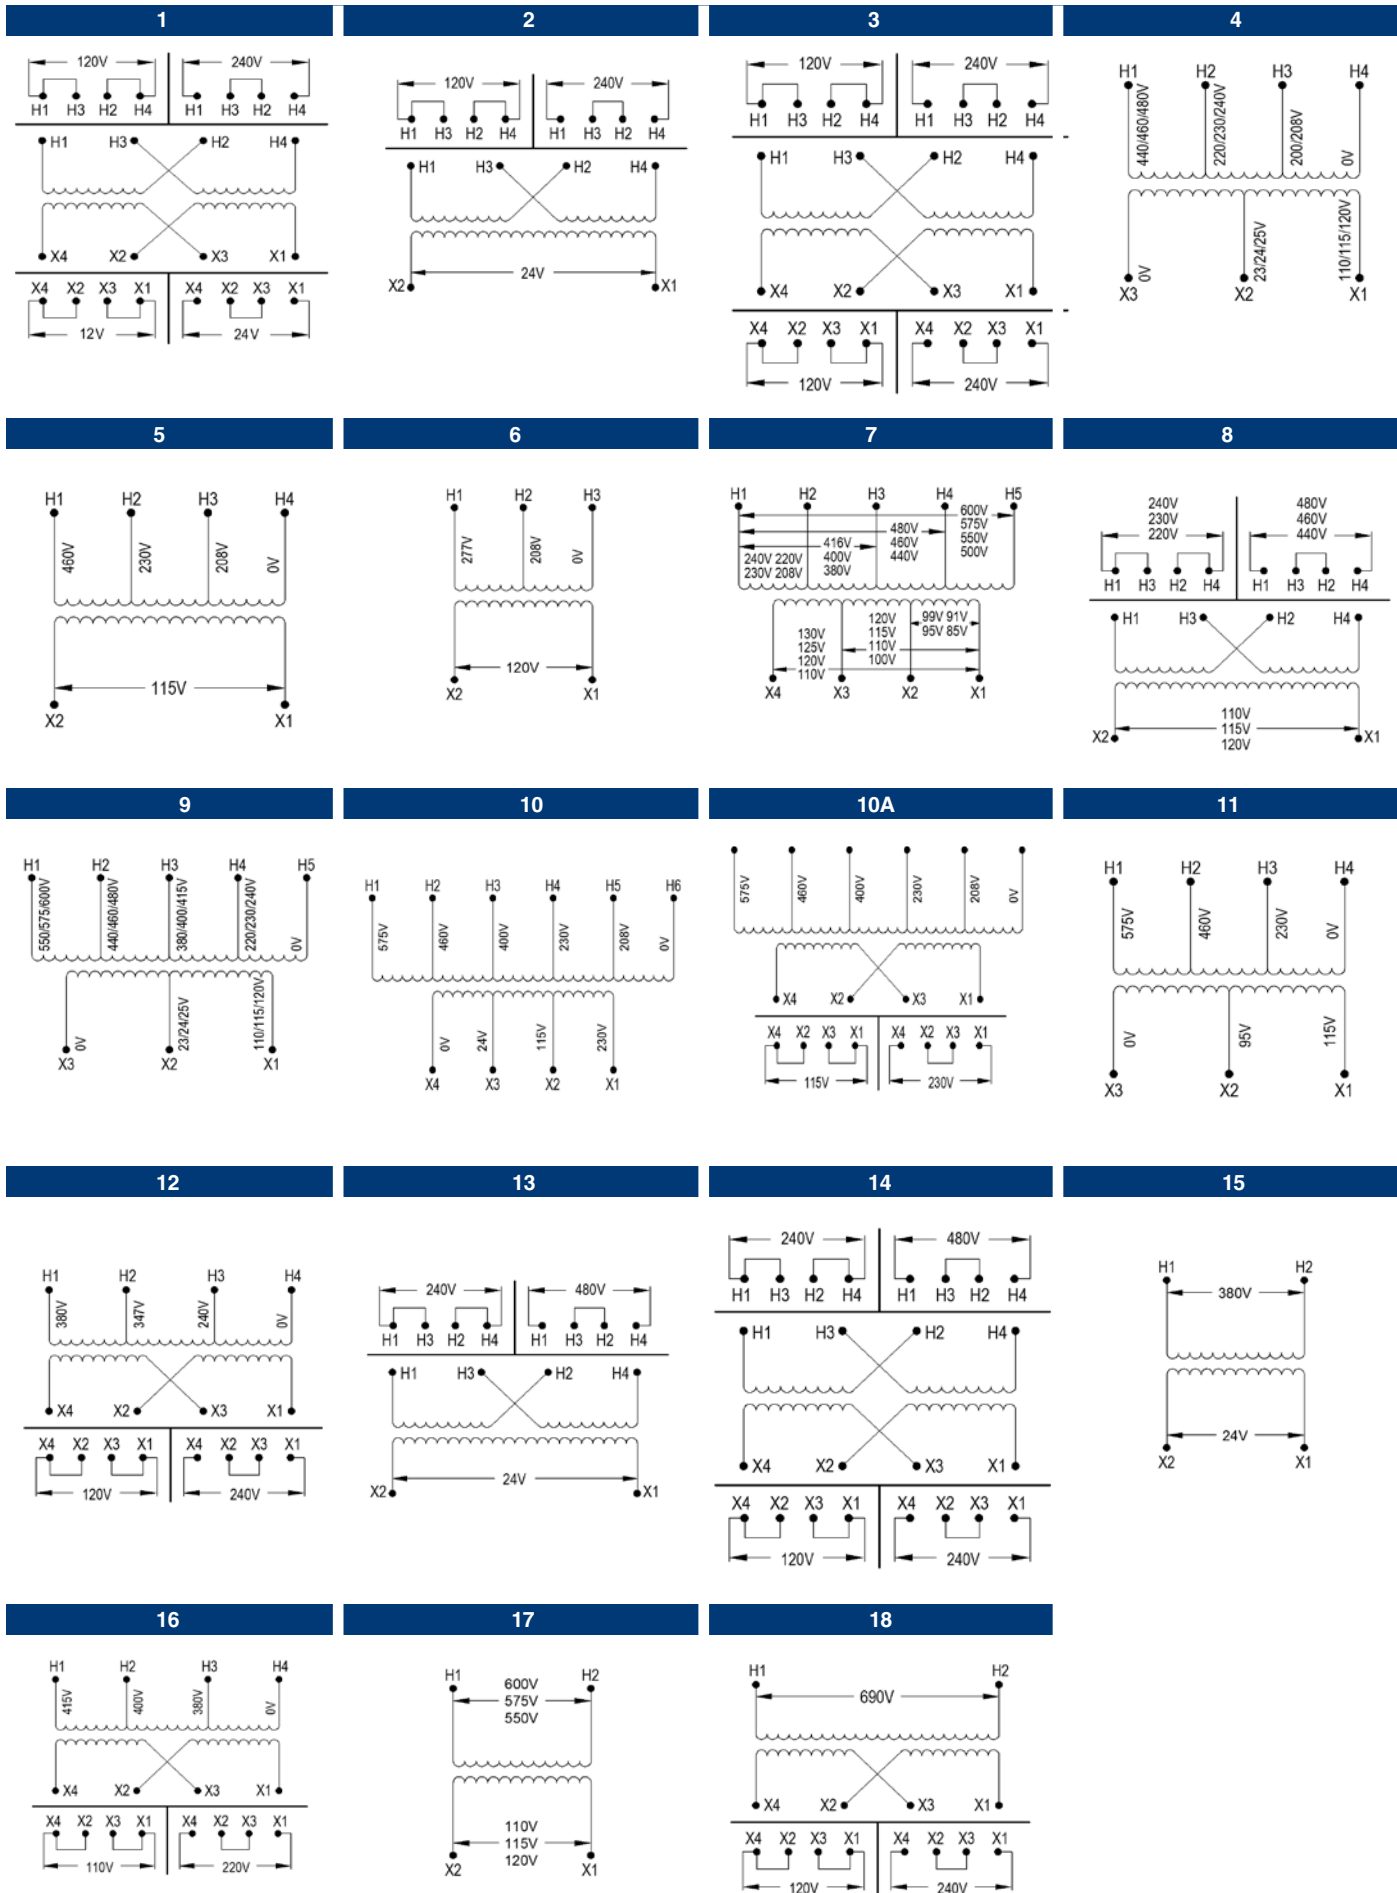

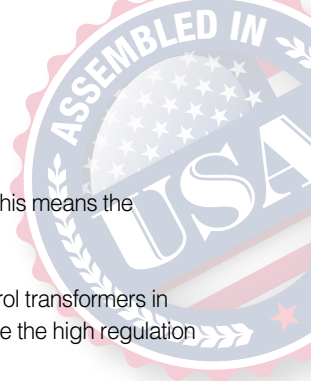

INDUSTRIAL CONTROL TRANSFORMERS FOR HARSH ENVIRONMENTS

Designed for control panels where internal installation of Control Transformers is prohibited

Some specifications require installation of large control transformers, usually 1000 to 5000 VA outside the control cabinet. This means the transformer must be in a sheet metal enclosure instead of the usual open core and coil construction method.

Acme meets this need by providing all of the power, protection, regulation and performance of our standard industrial control transformers in one UL-3R enclosure. These transformers are wound with copper magnet wire, deliver full nameplate capacity, and provide the high regulation required in control applications.

Voltage combinations available are: 240 X 480V Primary, 120V Secondary and 240/480/600V Primary, 120/100V Secondary. Ratings available are 1000, 2000, 3000 and 5000 VA. All units are UL listed, CSA certified, and covered by Acme's exclusive 10-year limited warranty.

Features

- Fully encapsulated and enclosed
- 55°C temperature rise, 155°C insulation
- Copper windings
- 1000, 2000, 3000, 5000 and 10000 VA sizes
- Voltage regulation exceeds NEMA requirements
- UL and UL-3R listed
- CSA certified
- 10-year limited warranty






240 X 480 PRIMARY VOLTS — 120 SECONDARY VOLTS — 1Ø, 50/60 Hz

VA Rating	Catalog Number	Output Amps	Height (inches)(cm)	Width (inches)(cm)	Depth (inches)(cm)	Weight (lbs.)(kg)	Wiring Diagram
1000	T181217	8.33	13.10 (33.3)	10.31 (26.2)	7.13 (18.1)	55 (24.9)	B
2000	T181219	16.67	14.77 (37.5)	10.31 (26.2)	7.13 (18.1)	80 (36.3)	B
3000	T181220	25.00	14.77 (37.5)	10.31 (26.2)	7.13 (18.1)	100 (45.4)	B
5000	T181221	41.67	13.85 (35.2)	13.25 (33.7)	10.19 (25.9)	140 (63.5)	B
10000	T181223	83.3	16.47 (41.8)	13.88 (35.3)	12.94 (32.9)	308 (139.7)	B

240/480/600 PRIMARY VOLTS — 120/100 SECONDARY VOLTS — 1Ø, 50/60 Hz

VA Rating	Catalog Number	Output Amps	Height (Inches)(Cm.)	Width (Inches)(Cm.)	Depth (Inches)(Cm.)	Weight (Lbs.)(Kg.)	Wiring Diagram
2000	T153929	16.67	14.77 (37.5)	10.31 (26.2)	7.13 (18.1)	80 (36.3)	C
3000	T153930	25.00	13.85 (35.2)	13.25 (33.7)	10.19(25.9)	130 (59.0)	C
5000	T153931	41.67	13.85 (35.2)	13.25 (33.7)	10.19 (25.9)	140 (63.5)	C

HARSH ENVIRONMENT WIRING DIAGRAMS

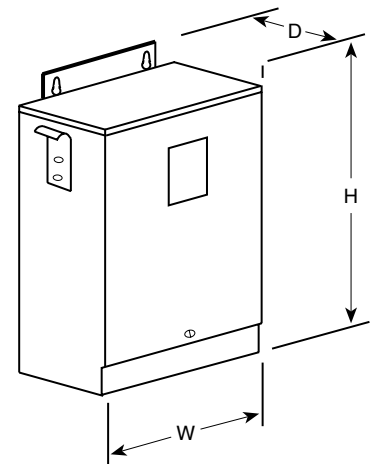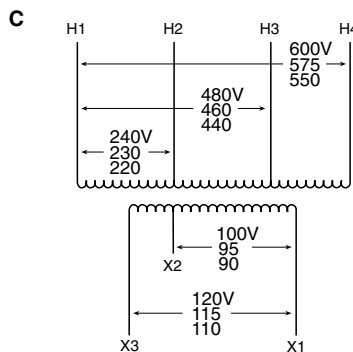



N56 W13355 Silver Spring Drive
Menomonee Falls, WI 53051
800.334.5214

hubbell.com/acmeelectric/en



Hubbell Canada Inc.
905-839-1138

Hubbell de Mexico, S.A. de C.V.
52-55-9151-9999



© 2018 Acme Electric All Rights Reserved.

ACM_BRO_027_0218