
IB IL 24 DO 4/EF(-2MBD)-PAC

**Inline digital output terminal,
4 outputs, 24 V DC, 500 mA**

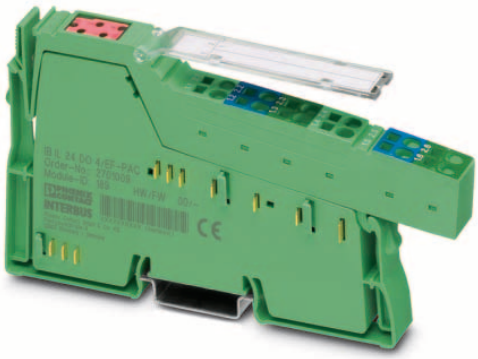

Data sheet
8265_en_00

© PHOENIX CONTACT 2012-01-04

1 Description

The terminal is designed for use within an Inline station. It is used to output digital signals.

Features

- Connections for four digital actuators
- Connection of actuators in 2 and 3-wire technology
- Nominal current per output: 0.5 A
- Total current of the terminal: 2 A
- Short-circuit and overload protected outputs
- Diagnostic and status indicators
- Approved for use in a safety-related segment circuit.

	This data sheet is only valid in association with the IL SYS INST UM E user manual.
	Make sure you always use the latest documentation. It can be downloaded from the product at www.phoenixcontact.net/catalog.
	When using the terminal in a safety-related segment circuit, pay attention to the corresponding notes!

2 Table of contents

1 Description 1
2 Table of contents 2
3 Ordering data 3
4 Technical data 3
5 Additional tables 7
5.1 Output characteristic curve 7
5.2 Power dissipation 7
5.3 Limitation of simultaneity, derating 7
6 Internal circuit diagram 8
7 Local status and diagnostic indicators 8
8 Terminal point assignment 9
9 Connection notes and examples 9
10 Notes on using the terminal in a safety-related segment circuit 9
11 Process data 10

3 Ordering data


Description	Type	Order No.	Pcs. / Pkt.
Inline digital output terminal block, complete with accessories (connector and labeling field), 4 outputs, 24 V DC, 500 mA, 3-wire connection method	IB IL 24 DO 4/EF-PAC	2701009	1
Inline digital output terminal, complete with accessories (plug connector and labeling field), 4 outputs, 24 V DC, 2 Mbaud transmission speed, 3-wire connection method	IB IL 24 DO 4/EF-2MBD-PAC	2701010	1

Accessories	Type	Order No.	Pcs. / Pkt.
Labeling field, width: 12.2 mm (Marking)	IB IL FIELD 2	2727501	10
Labeling field, width: 48.8 mm (Marking)	IB IL FIELD 8	2727515	10
Insert strip for laser printer, lettering field: 62 x 10 mm (Marking)	ESL 62X10	0809492	1
Insert strip for laser printer, lettering field: 62 x 46 mm (Marking)	ESL 62X46	0809502	5
Connector, for digital 4 or 16-channel Inline terminals (Plug/Adapter)	IB IL SCN-12	2726340	10
Connector, colored identification, for digital 4, or 16-channel Inline output terminal blocks (Plug/Adapter)	IB IL SCN-12-OCP	2727624	10

Documentation	Type	Order No.	Pcs. / Pkt.
User manual, English, Automation terminals of the Inline product range	IL SYS INST UM E	-	-
Data sheet, English, INTERBUS addressing	DB GB IBS SYS ADDRESS	-	-
Application note, English, The safety-related segment circuit	AH EN IL SAFE	-	-

4 Technical data

Dimensions (nominal sizes in mm)

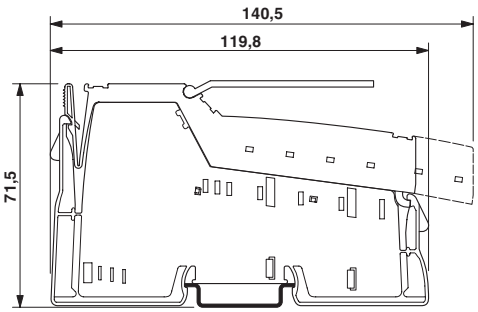

Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

General data	
Color	green
Weight	66 g (With connector)
Operating mode	Process data operation with 4 bits
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20
Protection class	III, IEC 61140, EN 61140, VDE 0140-1

Connection data	
Name	Inline connectors
Connection method	Spring-cage connection
Conductor cross section solid / stranded	0.08 mm² ... 1.5 mm²
Conductor cross section [AWG]	28 ... 16

Interface Inline local bus	
Connection method	Inline data jumper

Transmission speed Inline local bus	
IB IL 24 DO 4/EF-PAC	500 kBit/s
IB IL 24 DO 4/EF-2MBD-PAC	2 MBit/s

Power consumption (500 kBit/s)	
Segment supply voltage U_S	24 V DC (nominal value)
Current consumption from U_S	max. 2 A
Communications power U_L	7.5 V DC
Current consumption from U_L	max. 44 mA
Power consumption	max. 0.33 W (at U_L)

Power consumption (2 MBit/s)	
Segment supply voltage U_S	24 V DC (nominal value)
Current consumption from U_S	max. 2 A
Communications power U_L	7.5 V DC
Current consumption from U_L	max. 65 mA
Power consumption	max. 0.49 W (at U_L)

Digital outputs	
Number of outputs	4
Connection method	Spring-cage connection
Connection method	2, 3-wire
Nominal output voltage	24 V DC (voltage difference at $I_{nom} \leq 1$ V)
Maximum output current per channel	500 mA
Maximum output current per device	2 A
Nominal load, ohmic	12 W (48 Ω)
Nominal load, inductive	12 VA (1.2 H; 50 Ω)
Nominal load, lamp	12 W
Signal delay when switching on an ohmic nominal load	Typ. 100 µs

Digital outputs	
Signal delay when switching on an inductive nominal load	Typ. 100 ms (1.2 H; 50 Ω)
Signal delay when switching on a lamp nominal load	Typ. 100 ms (for switching frequencies up to 8 Hz; above this frequency, the lamp load behaves like an ohmic load)
Signal delay when switching off an ohmic nominal load	Typ. 1 ms
Signal delay when switching off an inductive nominal load	Typ. 50 ms (1.2 H; 50 Ω)
Signal delay when switching off a lamp nominal load	Typ. 1 ms
Maximum operating frequency with ohmic nominal load	max. 300 Hz (this switching frequency is limited by the data rate selected, the number of bus devices, the structure of the bus, the software used and the control or computer system used)
Maximum operating frequency with inductive nominal load	max. 0.5 Hz (1.2 H; 50 Ω)
Maximum operating frequency with lamp nominal load	max. 300 Hz (this switching frequency is limited by the data rate selected, the number of bus devices, the structure of the bus, the software used and the control or computer system used)
Reaction time with short-circuit	ca. 850 ms
Reaction time with ohmic overload	ca. 3 s
Behavior at voltage switch-off	The output follows the power supply without delay
Output data validity	Typ. 5 ms (after switching the 24 V voltage supply (power up))
One-time unsolicited energy	400 mJ
Limitation of the voltage induced on circuit interruption	-15 V ≤ U_{Demag} ≤ -46 V (U_{demag} = demagnetization voltage)
Output voltage when switched off	max. 2 V
Output current when switched off	max. 300 µA
Behavior with overload	Auto restart
Restart frequency with ohmic overload	250 Hz
Restart frequency with lamp overload	250 Hz
Behavior with inductive overload	Output can be destroyed
Reverse voltage resistance to short pulses	Reverse voltage proof
Resistance to permanent reverse voltage	to 2 A DC
Resistance to permanently applied surge voltage	No
Overcurrent shut-down	min. 0.7 A
Output current with ground connection interrupt when switched off	max. 25 mA
Switching capacity	Typ. 100 mW (In the case of ground connection interrupt; at 1 kΩ load resistance)
Inrush current	max. 1.5 A (for 20 ms)
Overload protection, short-circuit protection of outputs	Zener diode in output chip The four channels are thermally coupled, i.e. an error in one channel can also influence the other channels.

Programming Data	
ID code (hex)	BD
ID code (dec.)	189
Length code (hex)	41
Length code (dec.)	65
Process data channel	4 Bit
Input address area	0 Byte
Output address area	4 Bit
Parameter channel (PCP)	0 Bit
Register length (bus)	4 Bit



For the programming data/configuration data of other bus systems, please refer to the corresponding electronic device data sheet (e.g., GSD, EDS).

PROFIBUS telegram data

Required parameter data	3 Byte
Need for configuration data	4 Byte

Error messages to the higher level control or computer system

Short-circuit / overload of the digital outputs	Error message in the diagnostic code (bus) and display (2 Hz) via the LED (D) on the module

Electrical isolation/isolation of the voltage areas

5 V supply, incoming remote bus/7.5 V supply (bus logics)	500 V AC , 50 Hz , 1 min
5 V supply, outgoing remote bus/7.5 V supply (bus logics)	500 V AC , 50 Hz , 1 min
7.5 V supply (bus logics)/24 V supply (I/O)	500 V AC , 50 Hz , 1 min
24 V supply (I/O) / functional earth ground	500 V AC , 50 Hz , 1 min



To achieve electrical isolation between the logic level and the I/O area, supply these areas from separate power supply units. Interconnection of the power supply units in the 24 V area is not permitted (see also user manual).

Approvals

For the latest approvals, please visit www.phoenixcontact.net/catalog.

5 Additional tables

5.1 Output characteristic curve

Output characteristic curve when switched on (typical)	
Output current (A)	**Differential output voltage (V)**
0	0
0.1	0.04
0.2	0,08
0.3	0.12
0.4	0,16
0.5	0,20

5.2 Power dissipation

Formula for calculating the power dissipation of the electronics

500 Kbps

$$P_{EL} = 0{,}19\ W + \sum_{i=1}^{n} (0{,}10\ W + I_{Li}^{2} \times 0{,}40\ \Omega)$$

2 Mbps

$$P_{EL} = 0{,}40\ W + \sum_{i=1}^{n} (0{,}10\ W + I_{Li}^{2} \times 0{,}40\ \Omega)$$

Where:

P_{EL}	Total power dissipation in the terminal
i	Continuous index
n	Number of outputs set (n = 1 ... 4)
I_{Li}	Load current of output i

Power dissipation of the housing

Maximum 0.6 W (within the permissible operating temperature)

5.3 Limitation of simultaneity, derating

Ambient temperature T_U	Maximum load current		
-	100 % simultaneity	75 % simultaneity	50 % simultaneity
≤ 35 °C	0.5 A	0.5 A	0.5 A
≤ 45 °C	0.375 A	0.5 A	0.5 A
≤ 55 °C	0.25 A	0.33 A	0.5 A

At 100 % simultaneity, a load current of 0.5 A per channel is permissible within the ambient temperature range up to 35 °C, a load current of 0.375 A in the range from 35 °C to 45 °C and a load current of 0.25 A in the range from 45 °C to 55 °C.

If a maximum of two channels are operated in the permissible ambient temperature range (50 % simultaneity), a load current of 0.5 A may be tapped.

If all channels are used, the permissible working point must be defined according to the above-stated formula.

An example for calculating the working point can be found in the user manual IL SYS INST UM E.

6 Internal circuit diagram

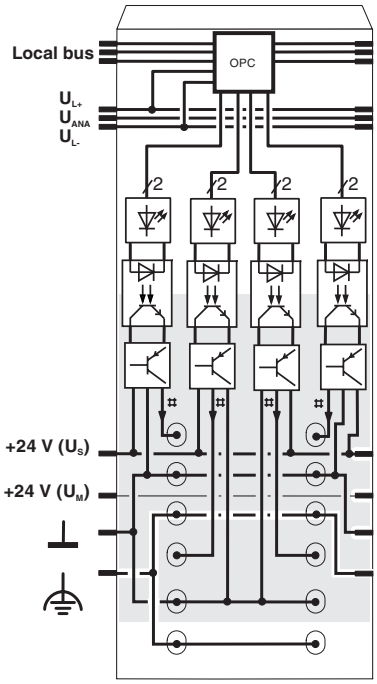


Figure 1 Internal wiring of the terminal points

OPC Protocol chip
(Bus logic including voltage conditioning)

LED (status indicator)

Optocoupler

Transistor

Digital output

Electrically isolated area

Explanation for other used symbols has been provided in the IL SYS INST UM E user manual.

7 Local status and diagnostic indicators




Figure 2 Local status and diagnostic indicators

Designation	Color	Meaning
D	Green	Diagnostics (bus and logic voltage)
1 ... 4	Yellow	Status of the outputs

Function identification

Pink

2 Mbps: White stripe in the vicinity of the D LED

8 Terminal point assignment

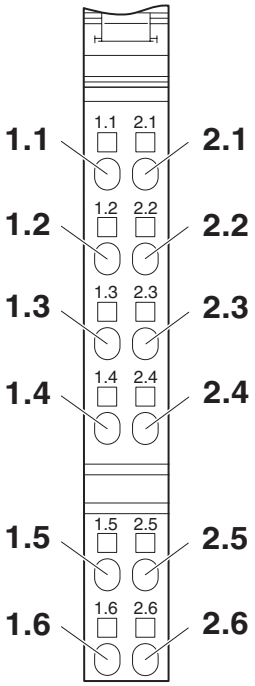


Figure 3 Terminal point assignment

Terminal point	Assignment
1.1 / 2.1	Signal output (OUT 1 / OUT 2)
1.2 / 2.2	Ground contact (GND) for 2 and 3-wire connection
1.3 / 2.3	FE connection for 3-wire connection
1.4 / 2.4	Signal output (OUT 3 / OUT 4)
1.5 / 2.5	Ground contact (GND) for 2 and 3-wire connection
1.6 / 2.6	FE connection for 3-wire connection

9 Connection notes and examples

When connecting the actuators, observe the assignment of the terminal points to the process data.

The connection of actuators in 3 and 2-wire technology is illustrated.




Figure 4 Typical connection of actuators

10 Notes on using the terminal in a safety-related segment circuit

The terminals listed below are approved approved for use within a safety-related segment circuit from hardware revision stated.

Order No.	Type	Hardware revision
2701009	IB IL 24 DO 4/EF-PAC	00
2701010	IB IL 24 DO 4/EF-2MBD-PAC	00

The hardware revision is marked on the side of the housing of each terminal.

When using the terminal in a safety-related segment circuit, also observe the requirements in the documentation of the safety terminal as well as in the AH DE IL SAFE / AH EN IL SAFE application notes!

The documentation can be found on the Internet at www.phoenixcontact.net/catalog.

11 Process data

Assignment of the terminal points to the output process data

(Byte.Bit) view	Byte.Bit	0.3	0.2	0.1	0.0
Assignment	Terminal point (signal)	2.4	1.4	2.1	1.1
	Terminal point (GND)	2.5	1.5	2.2	1.2
	Terminal point (FE)	2.6	1.6	2.3	1.3
Status indicator	LED	4	3	2	1



For the assignment of the illustrated (byte.bit) view to your INTERBUS control or computer system, please refer to the DB GB IBS SYS ADDRESS data sheet.