



T-3 1/4 BAYONET BASE SINGLE CHIP LEDs

ORDERING INFORMATION: MB111 WC 2 - 24V/25 - DP
(A) (B) (C) (D) (E)

(A) MODEL

MB111= SINGLE DOME LED
MBF111= FLAT-TOP SINGLE LED
RMB1191 = SINGLE DOME LED

(B) LED LENS COLOR


WC= WATER CLEAR

(C) LED EMITTING COLOR & WAVELENGTH

- 1= ULTRA RED (660nm) **OBSELETE**
- 2= STD. RED (630-635nm)
- U2= ULTRA HI EFF. RED (623-630nm)
- 3= STD. ORANGE (605-610nm)
- U3= ULTRA ORANGE (612-620nm)
- 4= STD. YELLOW (585nm)
- *S4= ULTRA YELLOW (590-595nm)
- 5= STD. GREEN (565-570nm)
- *6NW= ULTRA PURE GREEN (520-530nm)
- *8NW= FLUORESCENT "WHITE" (NO nm VALUE)
- *10NW= ULTRA BLUE (465-475nm)
- *12NW= SOFT WHITE (NO nm VALUE)
- *MAX. CONTINUOUS CURRENT 10mA.



MODEL: MB111

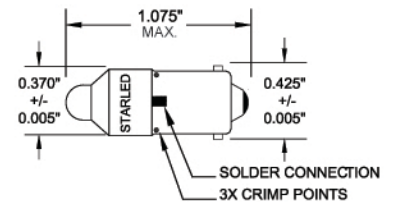


(D) STANDARD DC & AC OPERATING VOLTAGES/mA

5V/25, 12V/25, 24V/25, 28V/25, 36V/12, 48V/12, 60V/12 & 120V/6
MAX. CONTINUOUS CURRENT @ 120V/6mA
*VOLTAGES FROM 5-60V/10mA



MODEL: MBF111

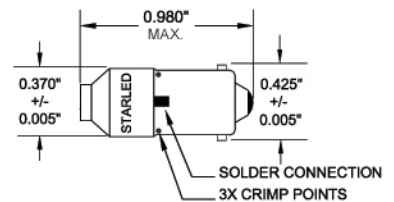

*VOLTAGES 6-48-DP: AVAILABLE IN ULTRA COLORS ONLY


NOTE: PLEASE CALL FACTORY FOR OTHER VOLTAGES

(E) CENTER CONTACT POLARITY

DP= DUAL POLARITY



MODEL: RMB1191

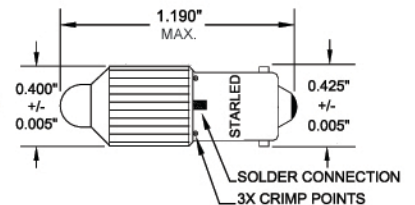

DIRECT INCANDESCENT LAMP REPLACEMENTS

53, 55, 57

HOUSING MAT'L. UL94VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE