


Inductive sensor Bi8U-M18E-AP6X-H1141




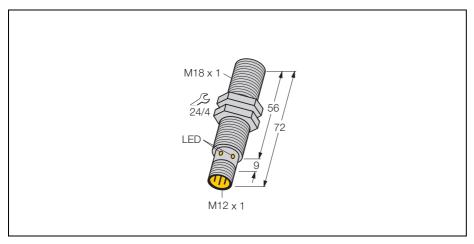

≤ -25 °C v ≥ +70 °C
nally open, pnp
ete
rrel, M18 x 1
n, chrome-plated
P-GF30
M12 x 1
٦)
1)
n)

- Threaded barrel, M18 x 1
- Chrome-plated brass
- factor 1 for all metals
- degree of protection IP68
- magnetic field immune
- high switching distance
- recessed mounting possible
- 3-wire DC, 10...30 VDC
- normally open, pnp output
- connector, M12 x 1

Wiring diagram



Functional principle

Inductive sensors are designed for wear-free and non-contact detection of metal objects. uprox+ sensors have considerable advantages due to their patented multi-coil system. They excel in highest switching distances, maximum flexibility and operational reliability as well as efficient standardisation.





Accessories

Type code	Ident-	Short text	Dimension drawing
PN-M18	No. 6905310	Screw cap; material: Stainless steel A2 1.4305 (AISI 303)	26 Mill x 1 0 20
QM-18	6945102	quick-mount fixing clamp with dead-stop; material: chrome-plated brass male thread M24 x 1.5. Note: The switching distance of proximity switches can be reduced by the use of quick mounting brackets.	MC4 to 10
BST-18B	6947214	fixing clamp with dead-stop; material: PA6	20 28 40 24
MW-18	6945004	mounting bracket; material: stainless steel A2 1.4301 (AISI 304)	19.7 19.7 19.1 50.8 19.1 50.8
BSS-18	6901320	fixing clamp; material: polypropylene	1.8 7.9 39.8