

Compact range
Buzzers



CB1-600G

15FC15157V0001



CB1-610R

15FC15159V0001



CB1-610Y

15FC15158V0001



CB1-620B

15FC15160V0001

Illuminated

| Color | Light and sound output | Rated current mA | Luminance mcd | Type | Order code | Pkg qty | Weight (1 pce) kg |
|-------|------------------------|---------------------|------------------|------|------------|---------|----------------------|
|-------|------------------------|---------------------|------------------|------|------------|---------|----------------------|

Rated voltage 24 V AC / DC

| | | | | | | | |
|----------|------------|----|-----|----------|-----------------|----|-------|
| ● Green | Continuous | 48 | 126 | CB1-600G | 1SFA619600R6002 | 10 | 0.021 |
| ● Red | Pulsation | 53 | 60 | CB1-610R | 1SFA619600R6101 | 10 | 0.021 |
| ● Yellow | Pulsation | 53 | 60 | CB1-610Y | 1SFA619600R6103 | 10 | 0.021 |

Rated voltage 110 ... 130 V AC

| | | | | | | | |
|----------|------------|----|-----|----------|-----------------|----|-------|
| ● Green | Continuous | 55 | 126 | CB1-601G | 1SFA619600R6012 | 10 | 0.021 |
| ● Red | Pulsation | 70 | 60 | CB1-611R | 1SFA619600R6111 | 10 | 0.021 |
| ● Yellow | Pulsation | 70 | 60 | CB1-611Y | 1SFA619600R6113 | 10 | 0.021 |

Rated voltage 110 ... 130 V DC

| | | | | | | | |
|----------|------------|----|-----|----------|-----------------|----|-------|
| ● Green | Continuous | 15 | 126 | CB1-602G | 1SFA619600R6022 | 10 | 0.021 |
| ● Red | Pulsation | 15 | 60 | CB1-612R | 1SFA619600R6121 | 10 | 0.021 |
| ● Yellow | Pulsation | 15 | 60 | CB1-612Y | 1SFA619600R6123 | 10 | 0.021 |

Rated voltage 230 V AC

| | | | | | | | |
|----------|------------|----|-----|----------|-----------------|----|-------|
| ● Green | Continuous | 55 | 126 | CB1-603G | 1SFA619600R6032 | 10 | 0.021 |
| ● Red | Pulsation | 70 | 60 | CB1-613R | 1SFA619600R6131 | 10 | 0.021 |
| ● Yellow | Pulsation | 70 | 60 | CB1-613Y | 1SFA619600R6133 | 10 | 0.021 |

Non-Illuminated

| Color | Light and sound output | Rated current mA | Luminance mcd | Type | Order code | Pkg qty | Weight (1 pce) kg |
|-------|------------------------|---------------------|------------------|------|------------|---------|----------------------|
|-------|------------------------|---------------------|------------------|------|------------|---------|----------------------|

Rated voltage 24 V AC / DC

| | | | | | | | |
|---------|------------|----|---|----------|-----------------|----|-------|
| ● Black | Continuous | 40 | - | CB1-620B | 1SFA619600R6206 | 10 | 0.021 |
| | Pulsation | 48 | - | CB1-630B | 1SFA619600R6306 | 10 | 0.021 |

Rated voltage 110 ... 130 V AC


| | | | | | | | |
|---------|------------|----|---|----------|-----------------|----|-------|
| ● Black | Continuous | 40 | - | CB1-621B | 1SFA619600R6216 | 10 | 0.021 |
| | Pulsation | 48 | - | CB1-631B | 1SFA619600R6316 | 10 | 0.021 |

Rated voltage 110 ... 130 V DC

| | | | | | | | |
|---------|------------|----|---|----------|-----------------|----|-------|
| ● Black | Continuous | 15 | - | CB1-622B | 1SFA619600R6226 | 10 | 0.021 |
| | Pulsation | 15 | - | CB1-632B | 1SFA619600R6326 | 10 | 0.021 |

Rated voltage 230 V AC

| | | | | | | | |
|---------|------------|----|---|----------|-----------------|----|-------|
| ● Black | Continuous | 40 | - | CB1-623B | 1SFA619600R6236 | 10 | 0.021 |
| | Pulsation | 40 | - | CB1-633B | 1SFA619600R6336 | 10 | 0.021 |

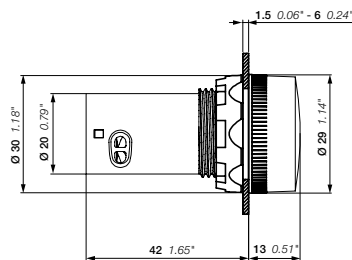

CB1
Dimensions (mm, inches)