
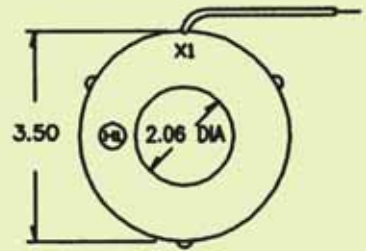
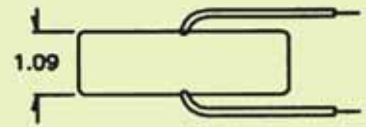
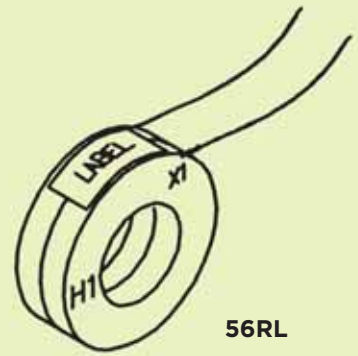
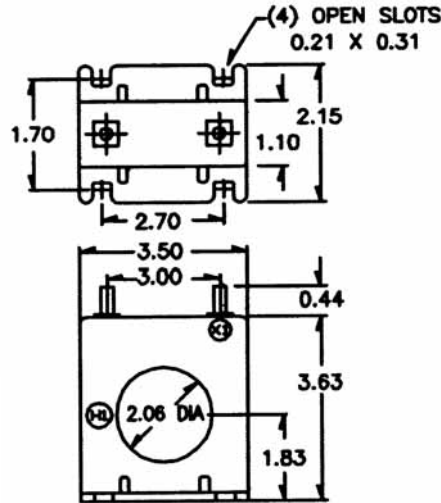


Model 56

Window Diameter 2.06"



Catalogue Number	Current Ratio	Accuracy at 60Hz	Burden VA at 60Hz
56 **-500	50:5	± 3%	0.5
56 **-750	75:5	± 1%	0.5
56 **-101	100:5	± 1%	1.0
56 **-151	150:5	± 1%	2.5
56 **-201	200:5	± 1%	4.0
56 **-251	250:5	± 1%	6.0
56 **-301	300:5	± 1%	7.5
56 **-401	400:5	± 1%	10.0
56 **-501	500:5	± 1%	12.5
56 **-601	600:5	± 1%	15.0
56 **-751	750:5	± 1%	7.0
56 **-801	800:5	± 1%	8.0
56 **-102	1000:5	± 1%	10.0
56 **-122	1200:5	± 1%	12.5

****NOTE:** When ordering, prefix Catalogue Number with model designation required, i.e. 56RL - 101.

Application

With ammeters, wallmeters and cross current compensation.

Frequency

50-400Hz

Insulation Level

0.6kV, 10kV full wave

- Flexible leads are UL 1015 105°C, CSA approved #16 AWG, 24" long
- Non-standard length to be specified.
- Terminals are brass studs No. 8 - 32 UNC with one flat washer, lockwasher and regular nut
- SFT case style also available as SFL with leads
- Approximate weight: 0.6 lb

Approvals

