


2 and 3-Wire *minifast*® Cordsets, Standard

- Straight Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 300 V, 9 A

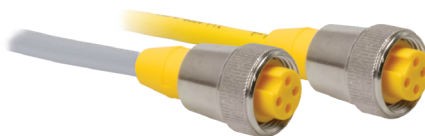

| Housing Style | Part Number | Cable | Features | Pinout | |
|---------------|---------------------|--|--|-------------------------------|--|
| | RKM 20- *M | AWM PVC Yellow 2x18 AWG 105°C 7.3 mm OD Cable #RF50511-*M† | <i>flexlife</i> ® | 1. BN 2. BU | |
| | RKM 30-*M | AWM PVC Yellow 3x18 AWG 105°C 7.3 mm OD Cable #RF50512-*M† | <i>flexlife</i> | | |
| | RKM 30-*M/S90 | AWM PUR Yellow 3x18 AWG 105°C 7.3 mm OD Cable #RF50545-*M† | <i>Cut Abrasion Immune</i> | 1. GN/YE 2. BN 3. BU | |
| | RKM 30-*M/S101 | AWM TPE Yellow 3x18 AWG 105°C 7.3 mm OD Cable #RF50545-*M† | <i>flexlife-10, high flex over 10 million cycles</i> | | |
| | RKM 311-*M | AWM PVC Yellow 3x18 AWG 105°C 7.2 mm OD Cable #RF51173-*M† | <i>flexlife</i> | 1. GN 2. RD/BK 3. RD/WH | |
| | RKM 311-*M/S600 | SJOOW CPE, Yellow 3x18 AWG 105°C 8.0 mm OD Cable #RF50658-*M† | <i>Weld Flash Immune, Flame Immune</i> | | |
| | RKM 311-*M/XOR/S620 | AWM Irradiated PVC Yellow 3x18 AWG 80°C, 5.7 mm OD Cable #RF04159-*M† | <i>Weld Resistance</i> | 1. GN 2. RD 3. RD/WH | |
| | RKM 31-*M | AWM PVC Yellow 3x18 AWG 105°C, 7.3 mm OD Cable #RF50513-*M† | <i>flexlife</i> | | |
| | RKM 31-*M/S600 | SJOOW CPE Yellow 3x18 AWG 105°C, 8.0 mm OD Cable #RF50654-*M† | <i>Weld Flash Immune, Flame Immune</i> | 1. BK 2. BN 3. BU | |
| | RKM 31-*M/S759 | AWM PVC Grey 3x22 AWG 80°C, 5.2 mm OD Cable #RF04106-*M† | <i>Braided Shield</i> | | |

* Length in Meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.
Standard coupling nut material is nickel plated brass "RKM .."; "RK .." indicates nylon and "RKV .." indicates 316 stainless steel.
† See Section N for *reelfast*® cable information.