


## Softstarters

### Enclosed PSTX softstarter - Normal duty




Max Motor Current	Motor Voltage	Control Voltage	Heavy duty HP Class 30 starts	Normal duty HP Class 10 starts	Frame	Dimensions (inches)	SCCR Rating	Weight (lb)	Ordering Code
28A	480V	CPT supplied	15 HP / 480 VAC	20 HP / 480 VAC	A	24H x 20W x 12D	65 kA	77	X20-B4-48-ND
68A	480V	CPT supplied	40 HP / 480 VAC	50 HP / 480 VAC	A	24H x 20W x 12D	65 kA	77	X50-B4-48-ND
104A	480V	CPT supplied	50 HP / 480 VAC	75 HP / 480 VAC	A	24H x 20W x 12D	65 kA	78	X75-B4-48-ND
130A	480V	CPT supplied	75 HP / 480 VAC	100 HP / 480 VAC	B	30H x 30W x 12D	65 kA	131	X100-B4-48-ND
169A	480V	CPT supplied	100 HP / 480 VAC	125 HP / 480 VAC	B	30H x 30W x 12D	65 kA	131	X125-B4-48-ND
192A	480V	CPT supplied	125 HP / 480 VAC	150 HP / 480 VAC	C	48H x 36W x 16D	65 kA	280	X150-B4-48-ND
248A	480V	CPT supplied	150 HP / 480 VAC	200 HP / 480 VAC	C	48H x 36W x 16D	65 kA	280	X200-B4-48-ND
302A	480V	CPT supplied	200 HP / 480 VAC	250 HP / 480 VAC	C	48H x 36W x 16D	65 kA	291	X250-B4-48-ND
361A	480V	CPT supplied	250 HP / 480 VAC	300 HP / 480 VAC	C	48H x 36W x 16D	65 kA	300	X300-B4-48-ND
480A	480V	CPT supplied	300 HP / 480 VAC	400 HP / 480 VAC	C	48H x 36W x 16D	65 kA	327	X400-B4-48-ND
590A	480V	CPT supplied	400 HP / 480 VAC	500 HP / 480 VAC	C	48H x 36W x 16D	65 kA	353	X500-B4-48-ND

See [catalog](#) for full description

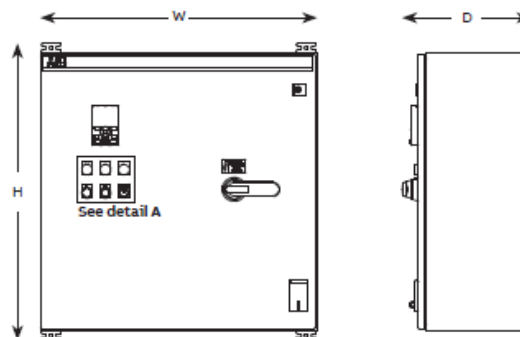

Detail A



**Typical heavy-duty applications include:**

- Centrifugal fan
- Conveyor belt (long)
- Crusher
- Mill
- Mixer
- Stirrer

**Typical normal-duty applications include:**

- Belt thruster
- Centrifugal pump
- Compressor
- Conveyor belt (short)
- Elevator

**Door-mounted pilot devices include:**

- PSTX keypad
- Hand-off-Auto Selector switch
- Start and stop pushbuttons
- Power on pilot light
- Run pilot light
- Fault pilot light