


Softstarters

Enclosed PSTX softstarter - Extreme duty




Max Motor Current	Motor Voltage	Control Voltage	Heavy duty HP Class 30 starts	Normal duty HP Class 10 starts	Frame	Dimensions (inches)	SCCR Rating	Weight (lb)	Ordering Code
80A	480V	CPT supplied	50 HP /480 VAC	60 HP /480 VAC	A	24H x 30W x 12D	65 kA	80	X50-B4-48-XD
130A	480V	CPT supplied	75 HP /480 VAC	100 HP /480 VAC	B	30H x 30W x 12D	65 kA	143	X75-B4-48-XD
169A	480V	CPT supplied	100 HP /480 VAC	125 HP /480 VAC	B	30H x 30W x 12D	65 kA	143	X100-B4-48-XD
192A	480V	CPT supplied	125 HP /480 VAC	150 HP /480 VAC	C	48H x 36W x 16D	65 kA	284	X125-B4-48-XD
248A	480V	CPT supplied	150 HP /480 VAC	200 HP /480 VAC	C	48H x 36W x 16D	65 kA	284	X150-B4-48-XD
302A	480V	CPT supplied	200 HP /480 VAC	250 HP /480 VAC	C	48H x 36W x 16D	65 kA	304	X200-B4-48-XD
361A	480V	CPT supplied	250 HP /480 VAC	300 HP /480 VAC	C	48H x 36W x 16D	65 kA	312	X250-B4-48-XD
480A	480V	CPT supplied	300 HP /480 VAC	400 HP /480 VAC	D	72H x 36W x 24D	65 kA	601	X300-B4-48-XD
590A	480V	CPT supplied	400 HP/480 VAC	500 HP/480 VAC	D	72H x 36W x 24D	65 kA	616	X400-B4-48-XD
720A	480V	CPT supplied	500 HP/480 VAC	600 HP/480 VAC	D	72H x 36W x 24D	65 kA	680	X500-B4-48-XD

See [catalog](#) for full description

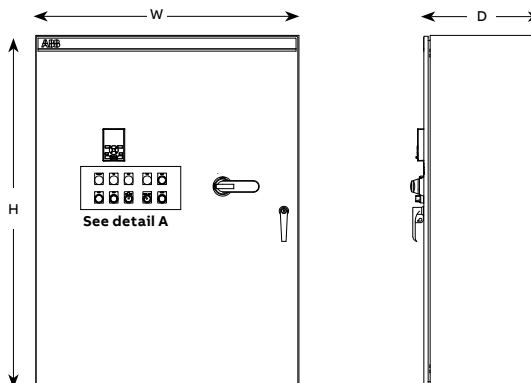

Detail A

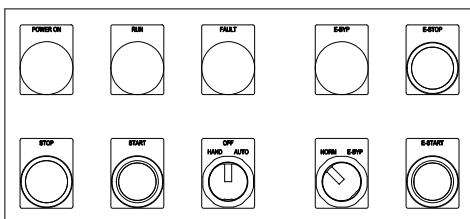

Door-mounted pilot devices include:

- PSTX keypad
- Hand-off-Auto Selector Switch
- Start and Stop Pushbuttons
- Power On Pilot Light
- Run Pilot Light
- Fault Pilot Light
- Normal-E-Bypass Selector Switch
- E-Bypass Start and Stop Pushbuttons
- E-Bypass Pilot Light

Typical heavy-duty applications include:

- Centrifugal fan
- Conveyor belt (long)
- Crusher
- Mill
- Mixer
- Stirrer

Typical normal-duty applications include:

- Belt thruster
- Centrifugal pump
- Compressor
- Conveyor belt (short)
- Elevator