RIF-2-BPT/4X21 - Relay base

2900934

https://www.phoenixcontact.com/us/products/2900934

PHŒNIX CONTACT

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Relay base RIF-2..., for industrial relay with 2 or 4 changeover contacts, Push-in connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

Commercial data

Item number	2900934
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	C465
Product key	DK6523
Catalog page	Page 298 (C-5-2019)
GTIN	4046356733175
Weight per piece (including packing)	68.7 g
Weight per piece (excluding packing)	62.825 g
Customs tariff number	85366990
Country of origin	CN

RIF-2-BPT/4X21 - Relay base

2900934

https://www.phoenixcontact.com/us/products/2900934



Technical data

Product properties

	Product type	Relay socket
	Product family	RIFLINE complete
Ele	ectrical properties	
	Neminal valtage L	

Е

Nominal voltage U _N	250 V AC/DC
Nominal current I _N	max. 12 A (Depends on application/assembly)
Protective circuit	depending on the selected input/suppressor modules

Connection data

Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section rigid	0.14 mm ² 1.5 mm ²
Conductor cross section flexible	0.14 mm ² 1.5 mm ²
	0.14 mm ² 1.5 mm ² (Ferrule with plastic sleeve)
	0.14 mm ² 1 mm ² (Ferrule with plastic sleeve, two conductors on double terminal block)
Conductor cross section AWG	26 16 (solid)
	26 16 (flexible)

Dimensions

Drill hole

Diameter	3.2 mm
Width	31 mm
Height	96 mm
Depth Retaining bracket	75 mm (with retaining bracket)

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V2 (Housing)

Environmental and real-life conditions

Ambient conditions	
Ambient temperature (operation)	-40 °C 85 °C (Depends on application/assembly)
Ambient temperature (storage/transport)	-40 °C 85 °C

Approvals

Corrosive gas test	
Identification	ISA-S71.04. G3 Harsh Group
	EN 60068-2-60



https://www.phoenixcontact.com/us/products/2900934



Mounting

Mounting type	DIN rail mounting
Mounting position	any




https://www.phoenixcontact.com/us/products/2900934



Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2900934

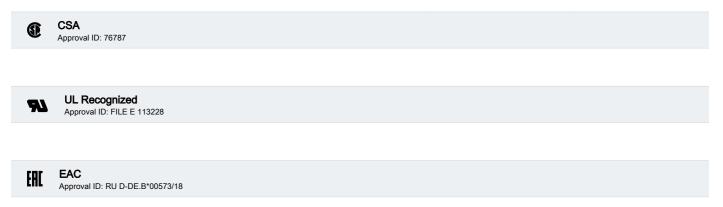



https://www.phoenixcontact.com/us/products/2900934



Classifications

ECLASS

	ECLASS-13.0	27371603
E	ГІМ	
	ETIM 9.0	EC001456
UNSPSC		
	UNSPSC 21.0	39122300



https://www.phoenixcontact.com/us/products/2900934



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%





Mandatory accessories

REL-IR2/LDP- 12DC/2X21 - Single relay

2903659

https://www.phoenixcontact.com/us/products/2903659



Plug-in industrial relay with power contacts, 2 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, input voltage: 12 V DC

REL-IR2/LDP- 24DC/2X21 - Single relay

2903660

https://www.phoenixcontact.com/us/products/2903660



Plug-in industrial relay with power contacts, 2 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, input voltage: 24 V DC

RIF-2-BPT/4X21 - Relay base

2900934

https://www.phoenixcontact.com/us/products/2900934



REL-IR2/LDP- 48DC/2X21 - Single relay

2903661

https://www.phoenixcontact.com/us/products/2903661



Plug-in industrial relay with power contacts, 2 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, input voltage: 48 V DC

REL-IR2/LDP- 60DC/2X21 - Single relay

2903662

https://www.phoenixcontact.com/us/products/2903662



Plug-in industrial relay with power contacts, 2 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, input voltage: 60 V DC



https://www.phoenixcontact.com/us/products/2900934



REL-IR2/LDP-110DC/2X21 - Single relay

2903663

https://www.phoenixcontact.com/us/products/2903663



Plug-in industrial relay with power contacts, 2 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, input voltage: 110 V DC

REL-IR2/LDP-125DC/2X21 - Single relay

2903664

https://www.phoenixcontact.com/us/products/2903664



Plug-in industrial relay with power contacts, 2 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, input voltage: 125 V DC



https://www.phoenixcontact.com/us/products/2900934



REL-IR2/LDP-220DC/2X21 - Single relay

2903665

https://www.phoenixcontact.com/us/products/2903665



Plug-in industrial relay with power contacts, 2 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, input voltage: 220 V DC

REL-IR2/L- 24AC/2X21 - Single relay

2903666 https://www.phoenixcontact.com/us/products/2903666



Plug-in industrial relay with power contacts, 2 changeover contacts, test button, status LED, mechanical switching position indicator, input voltage: 24 V AC



https://www.phoenixcontact.com/us/products/2900934



REL-IR2/L-120AC/2X21 - Single relay

2903667

https://www.phoenixcontact.com/us/products/2903667



Plug-in industrial relay with power contacts, 2 changeover contacts, test button, status LED, mechanical switching position indicator, input voltage: 120 V AC

REL-IR2/L-230AC/2X21 - Single relay

2903668

https://www.phoenixcontact.com/us/products/2903668



Plug-in industrial relay with power contacts, 2 changeover contacts, test button, status LED, mechanical switching position indicator, input voltage: 230 V AC



REL-IR4/LDP- 12DC/4X21 - Single relay

2903676

https://www.phoenixcontact.com/us/products/2903676



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 12 V DC

REL-IR4/LDP- 24DC/4X21 - Single relay

2903677 https://www.phoenixcontact.com/us/products/2903677



Plug-in industrial relay with power contacts, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, input voltage: 24 V DC





REL-IR4/LDP- 48DC/4X21 - Single relay

2903678

https://www.phoenixcontact.com/us/products/2903678



Plug-in industrial relay with power contacts, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 48 V DC

REL-IR4/LDP- 60DC/4X21 - Single relay

2903679 https://www.phoenixcontact.com/us/products/2903679



Plug-in industrial relay with power contacts, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 60 V DC



https://www.phoenixcontact.com/us/products/2900934



REL-IR4/LDP-110DC/4X21 - Single relay

2903680

https://www.phoenixcontact.com/us/products/2903680




Plug-in industrial relay with power contacts, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 110 V DC

REL-IR4/LDP-125DC/4X21 - Single relay

2903681 https://www.phoenixcontact.com/us/products/2903681



Plug-in industrial relay with power contacts, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 125 V DC



https://www.phoenixcontact.com/us/products/2900934



REL-IR4/L- 24AC/4X21 - Single relay

2903686

https://www.phoenixcontact.com/us/products/2903686



Plug-in industrial relay with power contacts, 4 changeover contacts, test button, status LED, mechanical switching position indicator, coil voltage: 24 V AC

REL-IR4/L-120AC/4X21 - Single relay

2903687 https://www.phoenixcontact.com/us/products/2903687



Plug-in industrial relay with power contacts, 4 changeover contacts, test button, status LED, mechanical switching position indicator, coil voltage: 120 V AC



https://www.phoenixcontact.com/us/products/2900934



REL-IR4/L-230AC/4X21 - Single relay

2903688

https://www.phoenixcontact.com/us/products/2903688



Plug-in industrial relay with power contacts, 4 changeover contacts, test button, status LED, mechanical switching position indicator, input voltage: 230 V AC $\,$


REL-IR4/LDP- 12DC/4X21AU - Single relay

2903669

https://www.phoenixcontact.com/us/products/2903669



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 12 V DC



https://www.phoenixcontact.com/us/products/2900934



REL-IR4/LDP- 24DC/4X21AU - Single relay

2903670

https://www.phoenixcontact.com/us/products/2903670



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 24 V DC

REL-IR4/LDP- 48DC/4X21AU - Single relay

2903671 https://www.phoenixcontact.com/us/products/2903671



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 48 V DC





REL-IR4/LDP- 60DC/4X21AU - Single relay

2903672

https://www.phoenixcontact.com/us/products/2903672



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 60 V DC

REL-IR4/LDP-110DC/4X21AU - Single relay

2903673 https://www.phoenixcontact.com/us/products/2903673



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 110 V DC



https://www.phoenixcontact.com/us/products/2900934



REL-IR4/LDP-220DC/4X21AU - Single relay

2903675

https://www.phoenixcontact.com/us/products/2903675



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 220 V DC

REL-IR4/LDP-220DC/4X21 - Single relay

2903682

https://www.phoenixcontact.com/us/products/2903682



Plug-in industrial relay with power contacts, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 220 V DC





REL-IR4/L- 24AC/4X21AU - Single relay

2903683

https://www.phoenixcontact.com/us/products/2903683



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, mechanical switching position indicator, coil voltage: 24 V AC

REL-IR4/L-120AC/4X21AU - Single relay

2903684

https://www.phoenixcontact.com/us/products/2903684



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, mechanical switching position indicator, coil voltage: 120 V AC



https://www.phoenixcontact.com/us/products/2900934



REL-IR4/L-230AC/4X21AU - Single relay

2903685

https://www.phoenixcontact.com/us/products/2903685



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, mechanical switching position indicator, coil voltage: 230 V AC

REL-IR2/24DC/2X21 - Single relay

2907051 https://www.phoenixcontact.com/us/products/2907051



Plug-in industrial relay with power contacts, 2 changeover contacts, test key, mechanical switch position indicator, polarity: bipolar, input voltage: 24 V DC



https://www.phoenixcontact.com/us/products/2900934



REL-IR2/100AC/2X21 - Single relay

2907052

https://www.phoenixcontact.com/us/products/2907052



Plug-in industrial relay with power contacts, 2 changeover contacts, test key, mechanical switch position indicator, polarity: bipolar, input voltage: 100 V AC

REL-IR2/200AC/2X21 - Single relay

2907053 https://www.phoenixcontact.com/us/products/2907053



Plug-in industrial relay with power contacts, 2 changeover contacts, test key, mechanical switch position indicator, polarity: bipolar, input voltage: 200 V AC



https://www.phoenixcontact.com/us/products/2900934



REL-IR4/24DC/4X21 - Single relay

2907054

https://www.phoenixcontact.com/us/products/2907054



Plug-in industrial relay with power contacts, 4 changeover contacts, test key, mechanical switch position indicator, polarity: bipolar, input voltage: 24 V DC

REL-IR4/100AC/4X21 - Single relay

2907055 https://www.phoenixcontact.com/us/products/2907055



Plug-in industrial relay with power contacts, 4 changeover contacts, test key, mechanical switch position indicator, polarity: bipolar, input voltage: 100 V AC



https://www.phoenixcontact.com/us/products/2900934



REL-IR4/200AC/4X21 - Single relay

2907056

https://www.phoenixcontact.com/us/products/2907056



Plug-in industrial relay with power contacts, 4 changeover contacts, test key, mechanical switch position indicator, polarity: bipolar, input voltage: 200 V AC

Accessories

FBS 2-6 - Plug-in bridge

3030336 https://www.phoenixcontact.com/us/products/3030336



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

RIF-2-BPT/4X21 - Relay base

2900934

https://www.phoenixcontact.com/us/products/2900934



FBS 2-6 BU - Plug-in bridge

3036932

https://www.phoenixcontact.com/us/products/3036932



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue

FBS 2-6 GY - Plug-in bridge

3032237 https://www.phoenixcontact.com/us/products/3032237



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: gray



https://www.phoenixcontact.com/us/products/2900934



STP 5-2 - Marker carriers

0800967

https://www.phoenixcontact.com/us/products/0800967



Marker carriers, snaps into STTB 2,5, STTB 4, PTTB 2,5, and PTTB 4 doublelevel spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unlabeled, mounting type: plug in, text field height: 10.5 mm, text field width: 5 mm

RIF-RH-2 - Retaining bracket

2900954 https://www.phoenixcontact.com/us/products/2900954



Relay retaining bracket, with ejector function and holder for marking material, suitable for RIF-2 relay base, for industrial relay



https://www.phoenixcontact.com/us/products/2900934



RIF-RHS-2 - Retaining bracket

2908043

https://www.phoenixcontact.com/us/products/2908043



Reinforced relay retaining bracket, with eject function and holder for marking material, suitable for RIF-2 relay base, for industrial relays

RIF-RHM-2 - Relay retaining bracket

2905984 https://www.phoenixcontact.com/us/products/2905984



Relay retaining bracket, wire model, suitable for RIF-2 relay base



https://www.phoenixcontact.com/us/products/2900934



MPS-MT - Test plug

0201744

https://www.phoenixcontact.com/us/products/0201744




Test plug, with solder connection up to 1 \mbox{mm}^2 conductor cross section, number of positions: 1, color: gray

RIF-LDP-12-24 DC - Plug-in module

2900939 https://www.phoenixcontact.com/us/products/2900939



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with freewheeling diode and yellow LED, polarity: A1+, A2-, input voltage: 12 V DC ... 24 V DC \pm 30 %





RIF-LDP-48-60 DC - Plug-in module

2900940

https://www.phoenixcontact.com/us/products/2900940



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with freewheeling diode and yellow LED, polarity: A1+, A2-, input voltage: 48 V DC ... 60 V DC $\pm 20~\%$

RIF-LDP-110 DC - Plug-in module

2900941 https://www.phoenixcontact.com/us/products/2900941



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with freewheeling diode and yellow LED, polarity: A1+, A2-, input voltage: 110 V DC $\pm 20~\%$





RIF-LV-12-24 UC - Plug-in module

2900942

https://www.phoenixcontact.com/us/products/2900942



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with varistor and yellow LED, input voltage: 12 V AC ... 24 V AC / DC \pm 20 %

RIF-LV-48-60 UC - Plug-in module

2900943 https://www.phoenixcontact.com/us/products/2900943



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with varistor and yellow LED, input voltage: 48 V AC \dots 60 V AC / DC ±20 %



PHŒNIX CONTACT

RIF-LV-120-230 AC/110 DC - Plug-in module

2900944

https://www.phoenixcontact.com/us/products/2900944



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with varistor and yellow LED, input voltage: 120 V AC... 230 V AC / 110 V DC ±20 %

RIF-V-12-24 UC - Plug-in module

2900945 https://www.phoenixcontact.com/us/products/2900945



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with varistor, input voltage: 12 V AC ... 24 V AC / DC \pm 20 %



https://www.phoenixcontact.com/us/products/2900934



RIF-V-48-60 UC - Plug-in module

2900947

https://www.phoenixcontact.com/us/products/2900947



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with varistor, input voltage: 48 V AC ... 60 V AC / DC ±20 %

RIF-V-120-230 UC - Plug-in module

2900948 https://www.phoenixcontact.com/us/products/2900948



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with varistor, input voltage: 120 V AC ... 230 V AC / DC ± 20 %





RIF-RC-12-24 UC - Plug-in module

2900949

https://www.phoenixcontact.com/us/products/2900949



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with RC element, input voltage: 12 V AC ... 24 V AC / DC ± 20 %

RIF-RC-48-60 UC - Plug-in module

2900950 https://www.phoenixcontact.com/us/products/2900950



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with RC element, input voltage: 48 V AC \dots 60 V AC / DC ±20 %





RIF-RC-120-230 UC - Plug-in module

2900951

https://www.phoenixcontact.com/us/products/2900951



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with RC element, input voltage: 120 V AC ... 230 V AC / DC ± 20 %

RIF-T3-24UC - Timer module

2902647 https://www.phoenixcontact.com/us/products/2902647



Plug-in module for extending a relay module to create a timer relay, 3 time functions, 4 time ranges, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, input voltage: $12 \text{ V DC} \dots 24 \text{ V DC}$





RIF-BR-12-230 AC - Plug-in module

2907060

https://www.phoenixcontact.com/us/products/2907060




Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with bridge rectifier, input voltage: 12 V AC \dots 230 V AC

RIF-LDM-12-24 DC - Plug-in module

2907057 https://www.phoenixcontact.com/us/products/2907057



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with freewheeling diode and yellow LED, input voltage: 12 V DC ... 24 V DC \pm 20 %, polarity A1-, A2+



https://www.phoenixcontact.com/us/products/2900934



NS 35/7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/us/products/0801733



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/us/products/0801681



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



https://www.phoenixcontact.com/us/products/2900934



NS 35/7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/us/products/1204119



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver

NS 35/7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/us/products/1204122



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver



https://www.phoenixcontact.com/us/products/2900934



NS 35/7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/us/products/0801704



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/7,5 ZN PERF 2000MM - DIN rail perforated

1206421 https://www.phoenixcontact.com/us/products/1206421



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver



https://www.phoenixcontact.com/us/products/2900934



NS 35/7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/us/products/1206434



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/us/products/0801762



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

RIF-2-BPT/4X21 - Relay base

2900934 https://www.phoenixcontact.com/us/products/2900934



NS 35/ 7,5 CAP - End cap

1206560 https://www.phoenixcontact.com/us/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730 https://www.phoenixcontact.com/us/products/1201730



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



https://www.phoenixcontact.com/us/products/2900934



NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

https://www.phoenixcontact.com/us/products/1201714



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

https://www.phoenixcontact.com/us/products/0806602



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white



https://www.phoenixcontact.com/us/products/2900934

PHŒNIX CONTACT

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

https://www.phoenixcontact.com/us/products/1204135



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

https://www.phoenixcontact.com/us/products/1201756



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver



https://www.phoenixcontact.com/us/products/2900934



NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

https://www.phoenixcontact.com/us/products/1206599



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

https://www.phoenixcontact.com/us/products/1206586



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver



https://www.phoenixcontact.com/us/products/2900934



NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

https://www.phoenixcontact.com/us/products/1201895



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573 https://www.phoenixcontact.com/us/products/1206573

DIN rail end piece, for DIN rail NS 35/15





https://www.phoenixcontact.com/us/products/2900934



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

https://www.phoenixcontact.com/us/products/1201798



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com