



The LLC4 combines resistance sensing circuitry with solid-state timing to provide single probe level maintenance. On adjustable units, the sensitivity adjustment allows accurate level sensing while ignoring foaming agents and floating debris. Isolated pulsed DC is provided at the probe to prevent electrolysis. A trickle current of less than 1mA determines the presence or absence of conductive liquid between the probe and common. The LLC4 Series can be used with many types of low voltage (resistance changing) transducers to perform other control functions like temperature limit control, photo limit control, condensation sensing, and ice sensing.

For more information see:
Appendix B, page 166, Figure 19 for dimensional drawing.
Appendix C, page 170, Figure 24 for connection diagram.

Operation

Drain (Pump-Down Mode): When the liquid level rises and touches the probe, the time delay begins. This time delay prevents rapid cycling of the output relay and its load. At the end of the time delay, the output relay and LED energize and remain energized until the liquid level falls below the probe level. The output relay and LED de-energize and remain de-energized until the liquid rises and touches the probe.

Fill (Pump-Up Mode): When the liquid level falls below the probe, the time delay begins. This time delay prevents rapid cycling of the output relay and its load. At the end of the time delay, the output relay and LED energize and remain energized until the liquid level rises and touches the probe. The output relay and LED then de-energize and remain de-energized until the liquid level again falls below the probe level.

Features:

- Single probe level control for conductive liquids
- Adjustable or fixed sensing up to 250 K Ω
- Selectable or fixed fill or drain operation available
- 24, 120, or 230VAC models are available
- Isolated pulsed DC on the probes
- Isolated, 4A, SPDT output contacts

Approvals:

Auxiliary Products:

- **Electrode:** P/N: PHST-38QTN
- **Threaded probe (24"):** P/N: LLP-24
- **Panel mount kit:** P/N: BZ1
- **8-pin socket:** P/N: NDS-8
- **Hold-down clips (sold in pairs):** P/N: PSC8 (NDS-8)

Available Models:

LLC42A10A	LLC44A60A
LLC42A1A	LLC44B1F250
LLC42B15A	LLC44B20A
LLC44A10A	LLC44B2A
LLC44A1A	LLC44B30A
LLC44A2A	LLC44B4A
LLC44A4A	LLC44B5A
LLC44A5A	LLC44B5F100

If desired part number is not listed, please call us to see if it is technically possible to build.

Order Table:


LLC4	X	X	X	X
	Input	Operation	Time Delay	Sense Resistance
	2 - 24VAC	A - Drain	Specify fixed delay	A - Adjustable (1-250k)
	4 - 120VAC	B - Fill	1-60s in 1s increments	F - Fixed (Specify fixed resistance (1-250) in 1K Ω increments.)
	6 - 230VAC			

Specifications

Control	Type.....ON/OFF (single level) resistance sensor with built-in time delay to prevent rapid cycling	Protection	SurgeIEEE C62.41-1991 Level A
Sensing VoltagePulsed DC at probe terminals	Sensing ResistanceFixed or adjustable to 250K Ω	Isolation Voltage \geq 1500V RMS between input, output & probe	Mechanical
Sensing Resistance ToleranceAdjustable: 1K \pm 500 Ω at low end; 250K \pm 25% at high end; Factory fixed: \pm 10% or 500 Ω , whichever is greater		MountingPlug-in socket	TerminationOctal 8-pin plug-in
Input	Voltage24, 120, or 230VAC	Dimensions2.91 x 2.39 x 1.78 in. (73.9 x 60.7 x 45.2 mm)	Environmental
Tolerance	24VAC.....-15%, +20%	Operating / Storage Temperature-20° to 60°C/-40° to 80°C	Weight \approx 6 oz (170 g)
120 & 230VAC.....-20%, +10%	AC Line Frequency50/60 Hz		
Output	TypeElectromechanical relay		
FormIsolated, SPDT	Rating4A resistive @ 240VAC; 1/10 hp @ 240VAC		


Appendix B - Dimensional Drawings

FIGURE 13

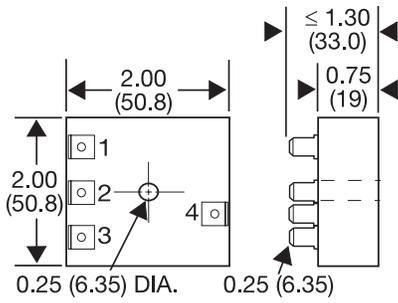



AF

FIGURE 14

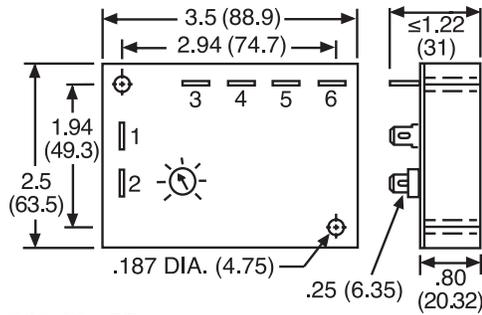


SC3; SC4; SQ

FIGURE 15

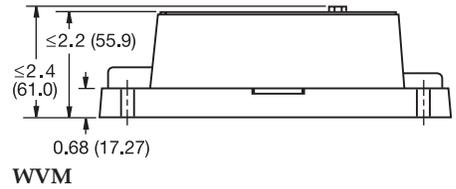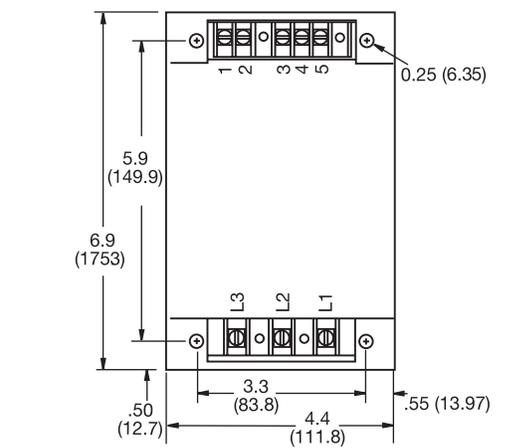


WVM

FIGURE 16

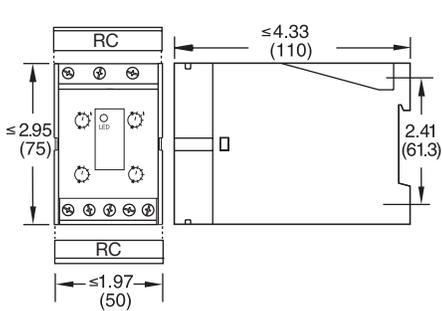


DLMU

FIGURE 17

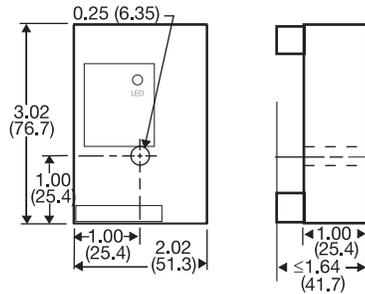


FB9L; HLMU; SCR9L

FIGURE 18

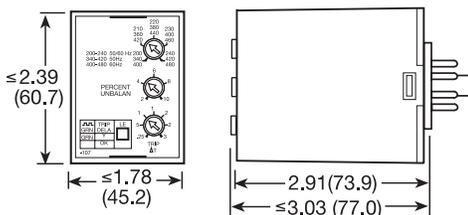


PLMU

FIGURE 19

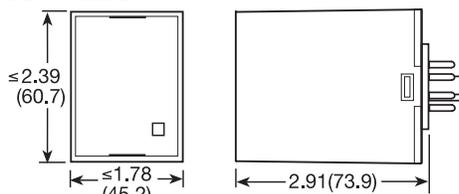


LLC4; LLC6; PLS

FIGURE 20

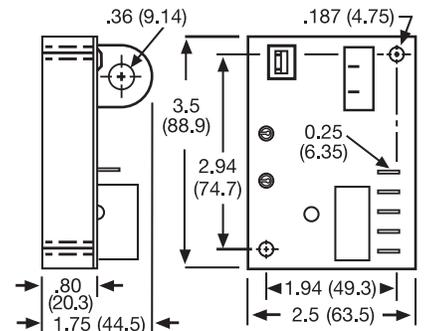


ECS; ECSW (ECS has spade connectors and ECSW has terminal board)

FIGURE 21

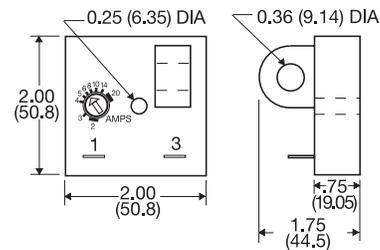


TCS; TCSA

FIGURE 22

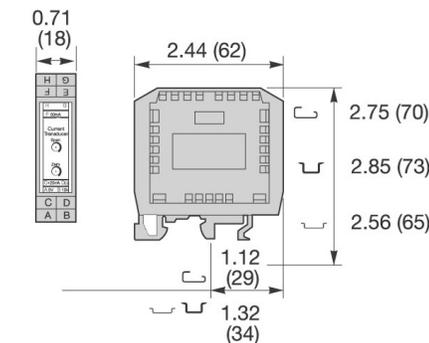

DCSA

FIGURE 23

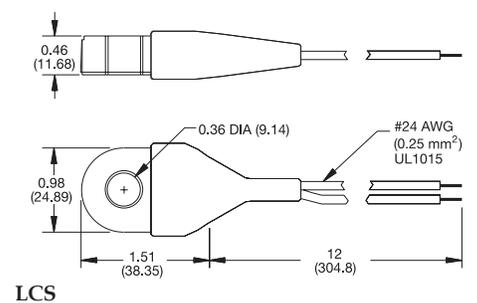


LCS

inches (millimeters)

Appendix C - Connection Diagrams

FIGURE 22 - LCS10T12



Wire Length: 500 ft. (152.4m) max. (Customer Supplied)
CAUTION: The LCS10T12 must be connected to the LPM12 or LPMG12 before current flows to prevent damage or shock hazard. Monitored wires must be properly insulated.

FIGURE 23 - LLC1 Series

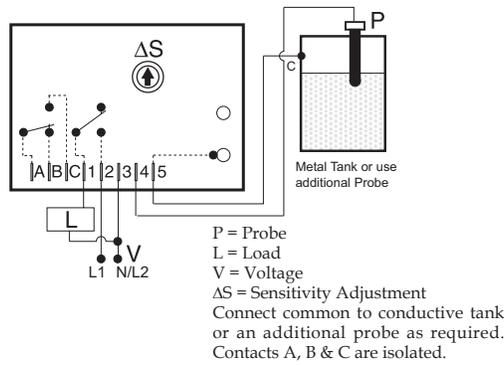


FIGURE 24 - LLC4 Series

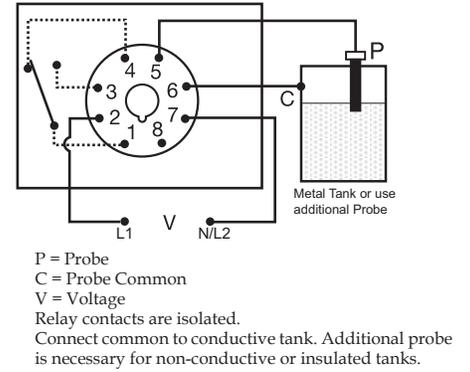


FIGURE 25 - LLC8 Series

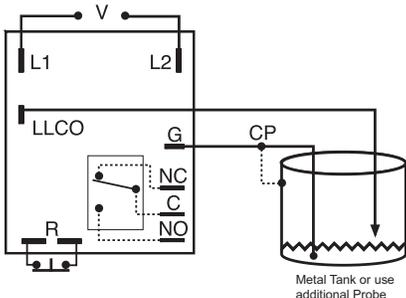


FIGURE 26 - LLC6 Series

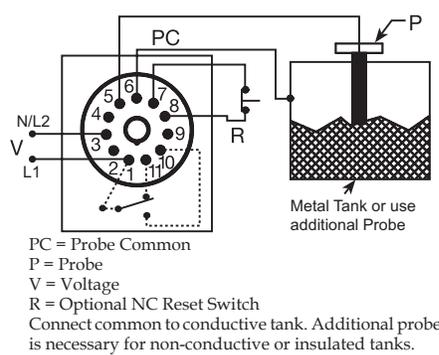


FIGURE 27 - LLC2 Series

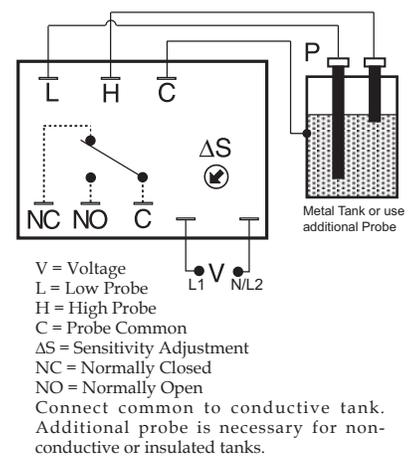


FIGURE 28 - LLC5 Series


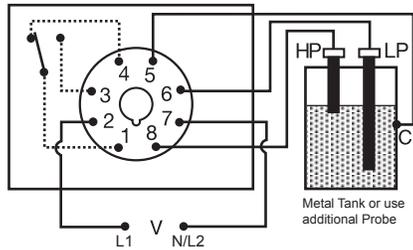


FIGURE 29 - ARP Series

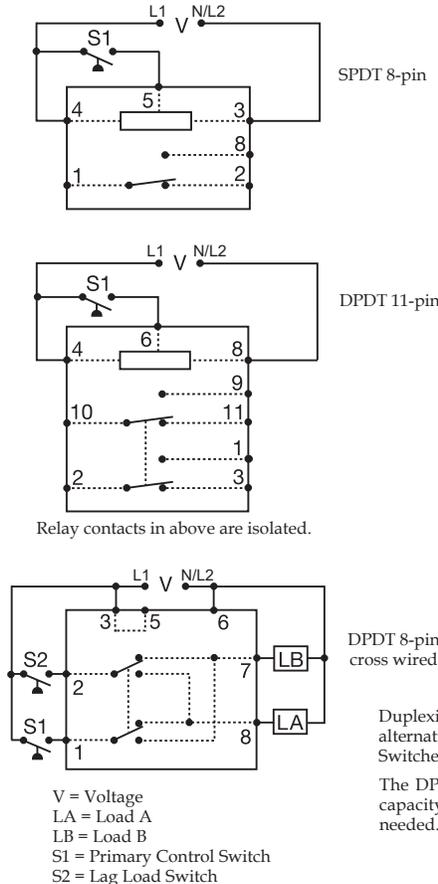

Duplexing (Cross Wired): Duplexing models operate the same as alternating relays and when both the Control (S1) and Lag Load (S2) Switches are closed, Load A and Load B energize simultaneously.

The DPDT 8-pin, cross wired option, allows extra system load capacity through simultaneous operation of both motors when needed. Relay contacts are not isolated.