


FEMALE END VIEW




- 1 = BROWN
- 2 = WHITE
- 3 = BLUE
- 4 = BLACK



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	POLYESTER/BLACK
MOLDED HEAD MATERIAL/COLOR	POLYESTER/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER CABLE JACKET MATERIAL/COLOR	PTFE/WHITE
CONDUCTOR INSULATION MATERIAL	PTFE
NUMBER OF CONDUCTORS [AWG]	5x22 AWG
TEMPERATURE RANGE	-20°C to +150°C (-4°F to +302°F)
PROTECTION CLASS	IP65

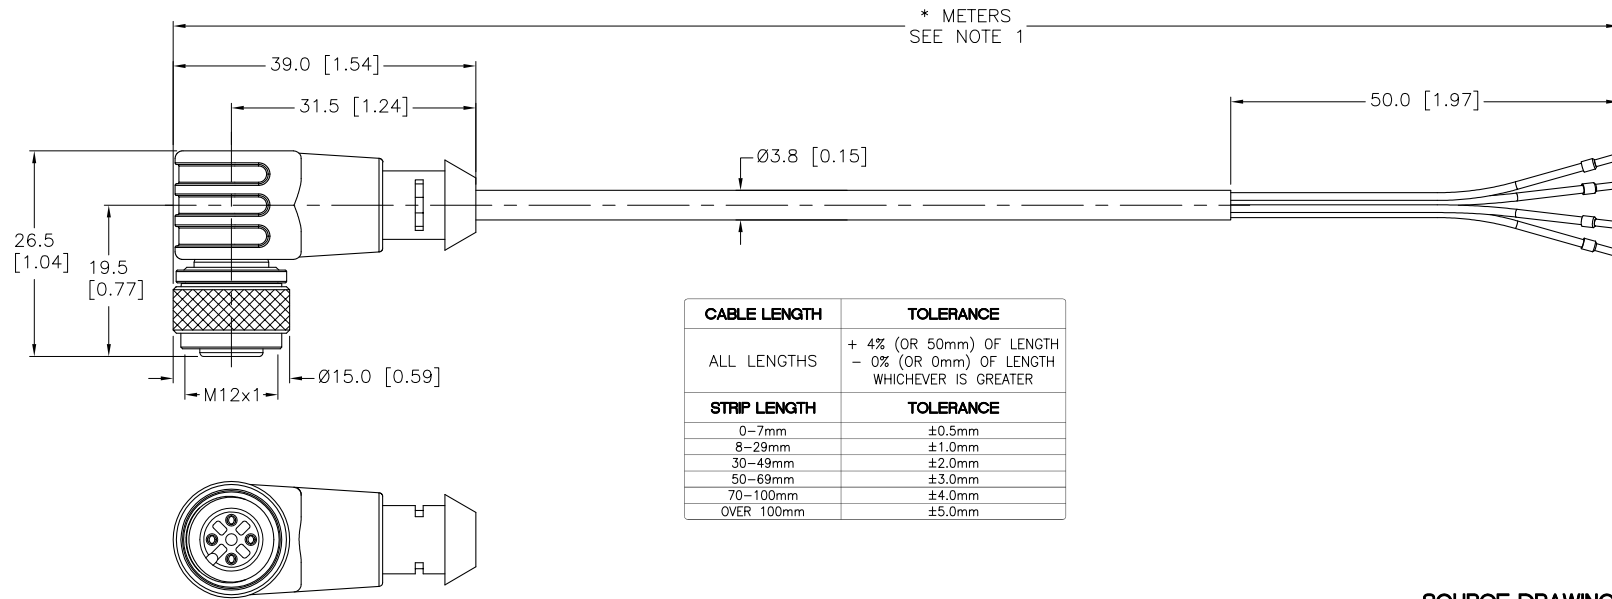

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- CONDUCTORS ARE STRIPPED AND CRIMPED WITH NON-INSULATING FERRULES, INSTEAD OF TINNING.
- GREY CONDUCTOR IS NOT CONNECTED AND TRIMMED BACK TO CABLE JACKET.
- "/S849" DESIGNATES 22AWG CONDUCTORS.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<b>TURCK INC</b> High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				DRFT RDS		DATE 12/17/08	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DESCRIPTION		HT-WKC 4.4T-*/S849	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		DSGN RDS		SCALE 1=1.0	
FINISH		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS		MILLIMETER [ INCH ]		FILE: 777023386		A	
A DRAWING RELEASE		RDS 01/15/09		DO NOT SCALE THIS DRAWING		SHEET 1 OF 1	
REV DESCRIPTION		BY DATE ECO NO.					