
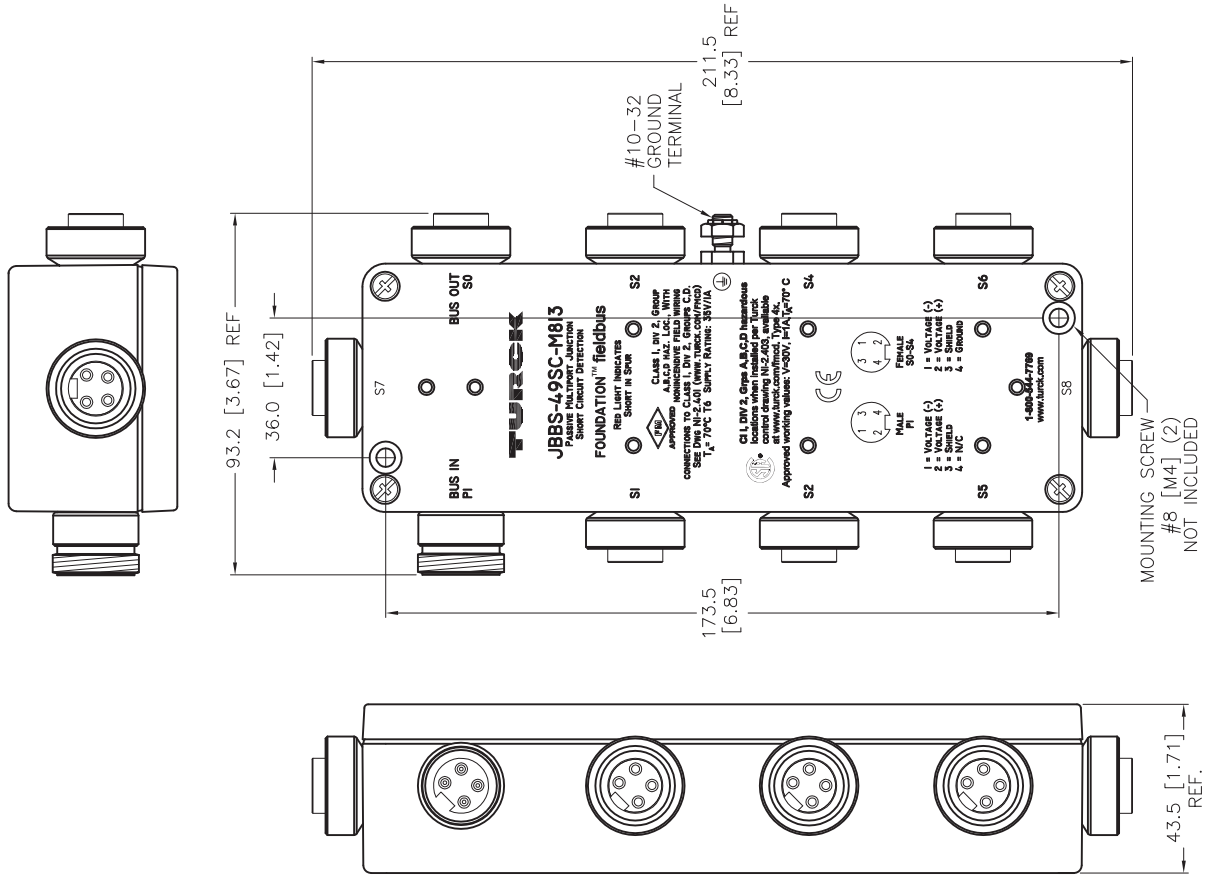
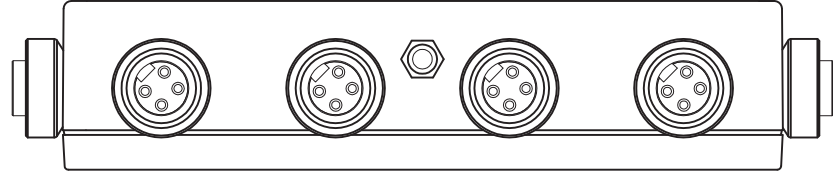


SPECIFICATIONS

HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MAT'L/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	9-32 VDC
SHORT CIRCUIT PROTECTION	0.55 VDC @ 55mA, 0.20 VDC @ 20mA
CURRENT CONSUMPTION	5.0 mA
OPEN CIRCUIT VOLTAGE	33 VDC
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)

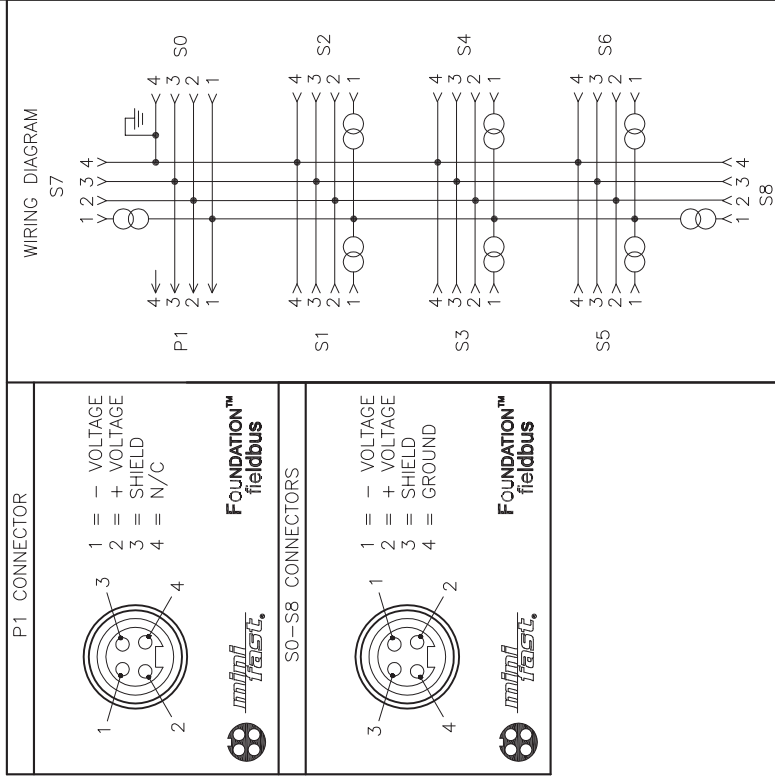

SOURCE DRAWING - FOR REFERENCE ONLY

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT PERMISSION IS PROHIBITED.		DATE	09/27/01	DESCRIPTION	JBBS-49SC-M813
DRFT	DF	SCALE	1=2.0	UNIT OF MEASUREMENT	MILLIMETER [INCH]
APVD	DF	MATERIAL		FINISH	
3RD ANGLE PROJECTION		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		CONTACT TURCK FOR MORE INFORMATION	
RELATED DOCUMENTS		1. 2. 3. 4.		ECO NO. 38770	
MATERIAL		FINISH		DATE 05/07/12	
DO NOT SCALE THIS DRAWING		FILE: U7909		SHEET 1 OF 1	

REV	DESCRIPTION	BY	DATE	ECO NO.	
M	DRAWING PROCESSED AS PART OF ECO 38770	KMY	05/07/12	38770	
TURK INC. 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com				REV	M