


SPECIFICATIONS					
CONTACT CARRIER MATERIAL	TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	10.0 A				
RATED VOLTAGE [V]	600 V				
OUTER JACKET MATERIAL/COLOR	PVC/BLACK				
CONDUCTORS	3x16 AWG				
CONDUCTOR INSULATION MATERIAL	PVC				
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67				

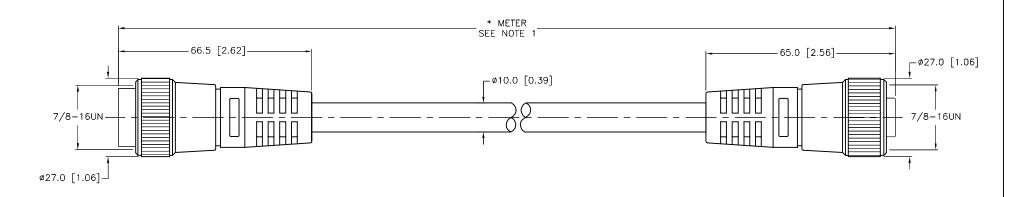

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNILESS OTHERWISE SPECIFIED					

## NOTES:

- 1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S760" DESIGNATES BLACK CABLE JACKET.
- 3. "/S771" DESIGNATES BLACK MOLDED PLUG BODIES.

Α	DRAWING RELEASE	RDS	06/22/15	
REV	DESCRIPTION	BY	DATE	ECO N

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND PROPERTY OF TUR INC. USE OF THI DOCUMENT WITHOL WRITTEN PERMISSIOL PROHIBITED.	High Technolog	Y Sensors and Automation Controls  MINNEA 1-8 (76 (76)	CAMPUS POLIS, MN 00-544- 3) 553-7 3) 553-0 turck.com	N 55441 7769 7300 )708 fax
MATERIAL		DRFT RDS	DATE 06/12/15	DESCRIPTION RYM RKM 36-*M/S78	M/S760/S771	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD L.H.	SCALE 1=1.3		00,01	, ,
FINISH	DRAWING ARE FOR REFERENCE ONLY	UNIT OF	MEASUREMENT	IDENTIFICATION NO.		REV
LINISH	CONTACT TURCK	MILLIME	TER [ INCH ]			Ιд
SEE SPECIFICATIONS	FOR MORE INFORMATION					/ \
		DO NOT SCALE THIS DRAWING FILE: 777035605 SHEE				