


NOTES:

SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON OR TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	250 V				
OUTER JACKET MATERIAL/COLOR	PVC/GREY				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	4x22 AWG, 1x20 AWG				
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K				

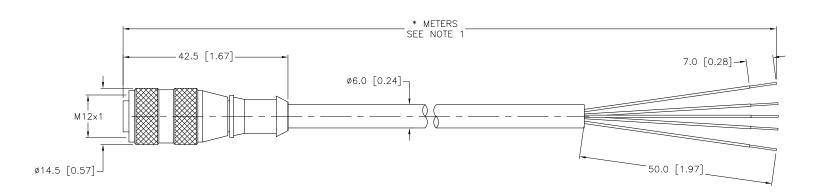

CABLE LENGTH	TOLERANCE		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE		
0-7mm	±0.5mm		
8-29mm	±1.0mm ±2.0mm		
30-49mm			
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:		
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO OF LENGTHS.	ORDER SPECIFIC	

F	UPDATE CABLE DIAMETER	KMY	11/10/11	36149
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	3000 CAMPUS MINNEAPOLIS, MI 1-800-544- (763) 553-7 (763) 553-0 turck.com	N 55441 7769 7300 0708 fax	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS	DRFT CBM APVD	DATE 10/09/00 SCALE 1=1.0	DESCRIPTION WAKW 4.	5T-*	
FINISH	DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		
	IN ORMATION	DO NOT SCALE	THIS DRAWING	FILE: 777000679	SHEET	1 OF 1