

FEMALE END VIEW	
SHIELD 6 7 4 3 2 8	
1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED	

SPECIFICATIONS		
CONTACT CARRIER MATERIAL	NYLON or TPU	
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
RATED CURRENT [A]	2.0 A	
RATED VOLTAGE [V]	60 VAC/75 VDC	
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY	
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS [AWG]	8x24 AWG	
DRAIN/SHIELD	26 AWG/ALUMPOLYESTER FOIL & T-C BRAIDED	
TEMPERATURE RANGE -40°C to +105°C (-40°F to +221°F)		
PROTECTION CLASS	MEETS IEC IP67	

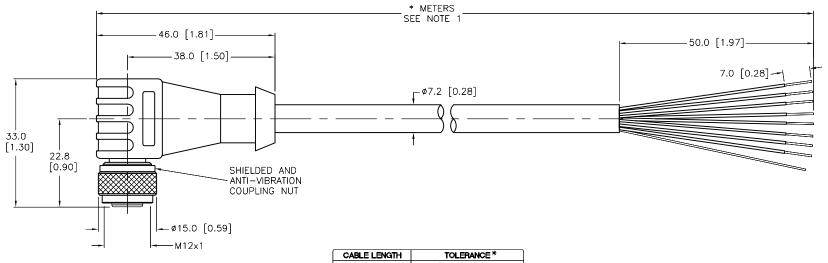



	CABLE LENGTH	TOLERANCE *		
	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
	STRIP LENGTH	TOLERANCE *		
	0-7mm	±0.5mm		
	8-29mm	±1.0mm		
	30-49mm	±2.0mm		
	50-69mm ±3.0mm			
	70-100mm	±4.0mm		
	0VER 100mm ±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

RELATED DOCUMENTS

## SOURCE DRAWING - FOR REFERENCE ONLY

## NOTES:

1."\*" INDICATES CABLE LENGTH IN METERS, CONTACT TURCK TO ORDER SPECIFIC LENGTHS

	SPECIFIC LENGIHS.			
	2. COUPLING NUT IS CONNECTED TO SHIELD.			
О	UPDATE PROTECTION CLASS	RDS	02/10/11	34226
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION				
1.					
2.					
3.	<del>(0)</del>				
4.	) 1				
MATERIAL					
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY				
FINISH					
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION				

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED. JBJ APVD

FILE: 777000450

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax

www.turck.us

SHEET 1 OF 1

DATE 10/17/01 DESCRIPTION WKS 8T-\* SCALE 1=1.0

UNIT OF MEASUREMENT

MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

IDENTIFICATION NO. REV