

## SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE


24V LED+RC M16x1.5


Form A (18 mm)  
24 V AC/DC  $\pm 25\%$   
LED and RC  
metric

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration

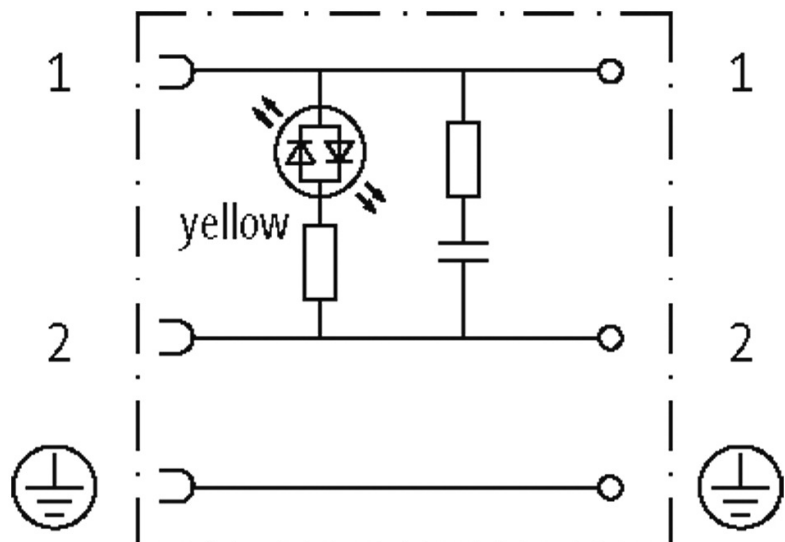

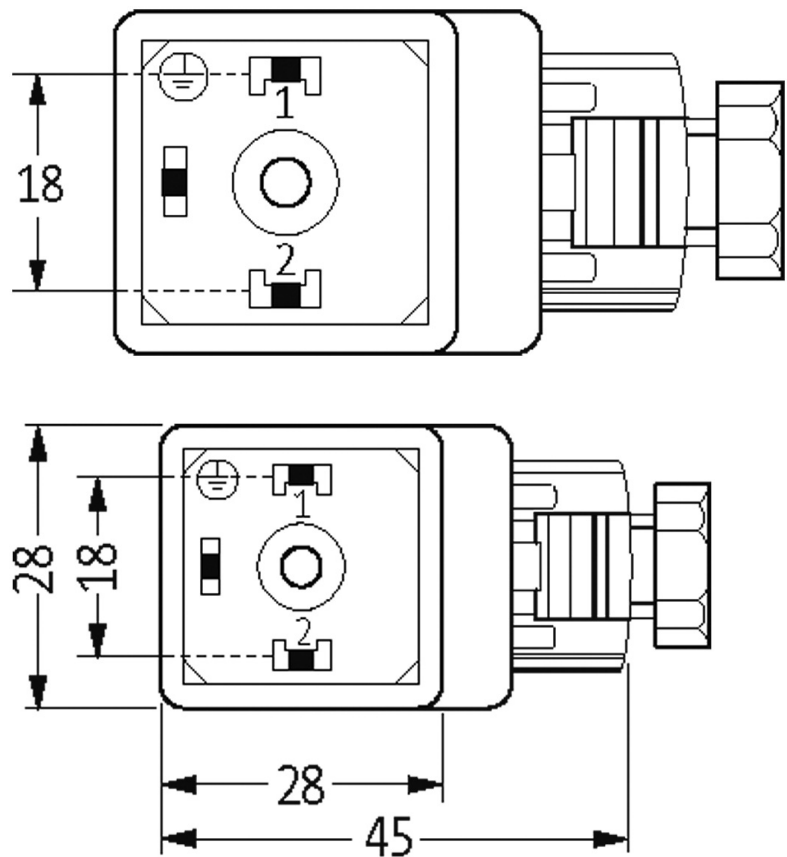

Height: 41 mm

Product may differ from Image

### Form

Form 29041

### Technical Data

Operating voltage	24 V AC/DC $\pm 25\%$
Operating current per contact	max. 2 A
Max. power (W)	max. 50 W (VA)
Sealing range (cable $\varnothing$ )	5...10 mm
Locking of ports	M3 (recommended torque 0.4 Nm)
Compression gland	M16 $\times$ 1.5 mm
Protection	IP65 inserted and tightened (EN 60529), with gland

### General data

Temperature range -20...+60 °C

### Commercial data

country of origin	CZ
customs tariff number	85366990
EAN	4048879187640

minimum order quantity

1