

Converter - FB-HSC - 2316371

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Head station for monitoring up to four PROFIBUS networks

Product Description

PROFIBUS head station

Why buy this product

- ✓ One communication interface module can drive up to ten individual PROFIBUS DP or PROFIBUS PA modules
- ✓ Powerful, embedded web server for configuration and access to network diagnostics
- ✓ Manage and configure PROFIBUS field devices using FDT/DTM

Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	1.000 g
Country of origin	Netherlands

Technical data

Dimensions

Width	25 mm
Height	100 mm
Depth	132 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 60 °C
Degree of protection	IP20

General

Converter - FB-HSC - 2316371

Technical data

General

Net weight	222 g
Color	green
UL, USA/Canada	UL 508 Listed
UL, Canada	CSA C22.2 No. 142

Power supply

Supply voltage range	10.8 V DC ... 26.4 V DC
Max. current consumption	800 mA
Conductor cross section flexible max.	2.50 mm ²
Conductor cross section flexible min.	0.20 mm ²
Conductor cross section solid max.	2.50 mm ²
Conductor cross section solid min.	0.20 mm ²
Conductor cross section AWG max.	12
Conductor cross section AWG min.	24

Serial interface

Interface 1	Ethernet
Interface	10/100 Mbps Ethernet
Number of connections	1
Connection method	RJ45
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12


Standards and Regulations

UL, USA/Canada	UL 508 Listed
UL, Canada	CSA C22.2 No. 142

Drawings

Converter - FB-HSC - 2316371

Dimensional drawing

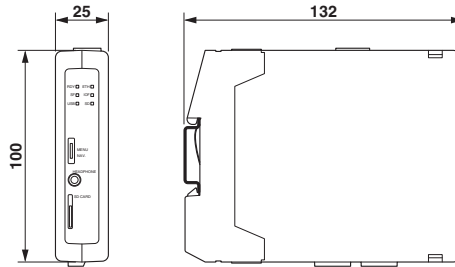

Classifications

eCl@ss

eCl@ss 5.1	27242208
eCl@ss 6.0	27242208
eCl@ss 8.0	27242610
eCl@ss 9.0	27242610

ETIM

ETIM 5.0	EC001600
ETIM 6.0	EC001600

UNSPSC

UNSPSC 13.2	32151602
-------------	----------

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed


Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
-----------	--	-------------------------------------------------------------------------------------------------------------------------------------------------------	---------------

Converter - FB-HSC - 2316371

Approvals

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
------------	-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------	---------------

cULus Listed			
--------------	-----------------------------------------------------------------------------------	--	--

Accessories

Accessories

Device coupler

Repeater - FB-DP-RPTR - 2316373



PROFIBUS DP interface/repeater module

Repeater - FB-PA/SC - 2316375



PROFIBUS PA interface module with oscilloscope

Repeater - FB-DP-RPTR/SC - 2316374



PROFIBUS DP interface/repeater module with oscilloscope functionality