

Incremental Type RI-10 (Shaft) / RI-12 (Hollow Shaft)



Versatile

- **The right connection for every application:** Cable, M12 connector, M23 connector, and Mil-Spec Connectors.
- **Wide variety of standard industrial mounting options:** Servo, square, clamping flanges.
- **Standardized designs for worldwide use:** Compatible with US and European standards; 5-30 V supplies; Various output options; Up to 5,000 ppr.



Compact

- **Small footprint:** Outer diameter 2" x 2" Can utilize 2" or 2.5" flanges.

Rugged and Tough

- **High tolerance to vibration, shock and alignment issues:** Sturdy double bearing lock design.
- **Environmentally protected design:** Die-cast housings; butyl rubber shaft seals and O-rings; robust stainless steel hubs, flanges, and disc tables. Ratings up to IP67.
- **Wide temperature range:** -40 to +185 °F (-40 to +85 °C)
- Also available in seawater resistant version, certified acc. to salt-spray test IEC 68-2-11 ≥ 672 hours

Mechanical Characteristics:

Speed IP65 ¹⁾ :	max. 12,000 RPM
Speed IP67 ²⁾ :	max. 6,000 RPM
Rotor moment of inertia:	Shaft: approx. 0.098 oz-in ² (1.8 x 10 ⁻⁶ kgm ²)
	Hollow shaft: approx. 0.328 oz-in ² (6.0 x 10 ⁻⁶ kgm ²)
Starting torque:	< 1.4 oz-in (< 0.01 Nm), IP65 < 7 oz-in (< 0.05 Nm), IP67
Radial load capacity of the shaft:	18 lbs (80 N)
Axial load capacity of the shaft:	9 lbs (40 N)

¹⁾ For continuous operation 6000 RPM

²⁾ For continuous operation max. 3000 RPM

³⁾ With connector: -40 °F (-40 °C), cable fixed: -22 °F (-30 °C), cable moved: -4 °F (-20 °C)

Weight:	approx. 0.9 lbs (0.4 kg)
Protection acc. to EN 60 529 without shaft sealing:	IP65
Protection acc. to EN 60 529 with shaft sealing:	IP67
Working temperature ³⁾ :	-40 to +185 °F (-40 to +85 °C)
Shaft:	stainless steel
Shock resistance acc. to EN 60068-2-27:	250 g (2,500 m/s ²), 6 ms
Vibration resistance to EN 60068-2-6:	10 g (100 m/s ²), 10-2,000 Hz

Electrical Characteristics:

Output circuit [Key Code]:	RS 422 [4B] (TTL compatible)	RS 422 [4A] (TTL compatible)	Push-Pull [2B] (IC-DL)	Push-Pull [2K] (7272) ³⁾	Open Collector [CA] (7273) ³⁾
Supply voltage:	5-30 VDC	5 V ±5%	10-30 V DC	5-30 V DC	5-30 V DC
Power consumption (no load):	typ. 40 mA max. 90 mA	typ. 40 mA max. 90 mA	typ. 50 mA max. 100 mA	typ. 50 mA max. 100 mA	100 mA
Permissible load/channel:	max. ±20 mA	max. ±20 mA	max. ±20 mA	max. ±20 mA	20 mA sink@30 VDC
Pulse frequency:	max. 300 kHz	max. 300 kHz	max. 300 kHz	max. 300 kHz	max. 300 kHz
Signal level high:	min. 2.5 V	min. 2.5 V	min. +V -1.0 V	min. +V -2.0 V	n/a
Signal level low:	max. 0.5 V	max. 0.5 V	max. 0.5 V	max. 0.5 V	n/a
Rise time t _r :	max. 200 ns	max. 200 ns	max. 1 μs	max. 1 μs	
Fall time t _f :	max. 200 ns	max. 200 ns	max. 1 μs	max. 1 μs	
Short-circuit protected ¹⁾ :	yes ²⁾⁴⁾	yes ²⁾⁴⁾	yes	yes ²⁾⁴⁾	yes
Reverse polarity protection:	yes	no	yes	no	no

¹⁾ If supply voltage correctly applied

²⁾ Only one channel allowed to be shorted-out: (If +V=5 V, short-circuit to channel, 0 V, or +V is permitted.) (If +V=5-30 V, short-circuit to channel or 0 V is permitted.)

³⁾ Max. recommended cable length 30 m

⁴⁾ Approximately one minute

Rotary Position Technology

Incremental Encoders

Incremental Type RI-10 (Shaft) / RI-12 (Hollow Shaft)

Standard Wiring :

Connection Type	Case Ground	Common (0V)	+V	A	\bar{A}	B	\bar{B}	Z	\bar{Z}	N/C	N/C	0V ¹⁾ Sens	+V ²⁾ Sens
M23 <i>multifast</i> [®]	Coupling Nut	10	12	5	6	8	1	3	4	-	-	11	2
MS 6-pin	-	A	B	E	-	D	-	C	-	-	-		
MS 7-pin	G	F	D	A	-	B	-	C	-	-	-		E
MS 10-pin	J	F	D	A	G	B	H	C	I	-	-		E
M12 <i>eurofast</i> [®]	Coupling Nut	1	2	3	4	5	6	7	8	-	-		
Cable	Shield/Drain	WH	BN	GN	YE	GY	PK	BU	RD	BK	VT	GY/PK	RD/BU

¹⁾ The sensor cables are connected to the supply voltage internally. If long feeder cables are involved they can be used to adjust or control the voltage at the encoder.

²⁾ Isolate unused outputs before initial startup.

Special Pin Configuration:

		Connection Type	Case Ground	Common (0V)	+V	A	\bar{A}	B	\bar{B}	Z	\bar{Z}
Wiring Code	N41	M12 <i>eurofast</i> [®]	Coupling Nut	7	2	1	3	4	5	6	8
	N35	MS 6-pin	-	A, F	B	D	-	E	-	C	-
	N38	MS 7-pin	G	F	D	A	C	B	E	-	-
	N40	MS 10-pin	G	F	D	A	H	B	I	C	J

Wiring Diagrams:

Male Encoder View				
M12 <i>eurofast</i> [®] Pinout	M23 <i>multifast</i> [®] Pinout	MS Pinout (6-pin)	MS Pinout (7-pin)	MS Pinout (10-pin)
Mating Cordset: E-RKC 8T-930-*	Mating Cordset: E-CKM 12-931-*	Mating Cordset: E-MK 6-0-*	Mating Cordset: E-MK 7-930-*	Mating Cordset: E-MK 10-931-*

* Length in meters.

Incremental Type RI-10 (Shaft) / RI-12 (Hollow Shaft) Accessories - Inserts

Isolation/Adapter Inserts for Hollow Shaft Encoders




Thermal and Electrical Isolation of the Encoders:

Isolation inserts prevent currents from passing through the encoder bearings. These currents can occur when using inverter controlled three-phase or AC vector motors and considerably shorten the service life of the encoder bearings. In addition, the encoder is thermally isolated as the plastic does not transfer the heat to the encoder.

Tip:

By using these adapter inserts, you can achieve six different hollow shaft diameters, all on the basis of one 15 mm encoder.

Dimensions:

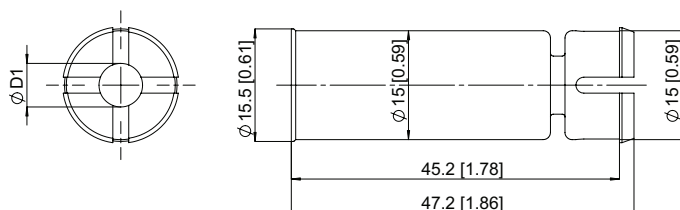

Isolation insert	D1 [mm]	D1 [in]
8.0010.4021.0000	6	
8.0010.4022.0000	6.35	(1/4)
8.0010.4023.0000	10	
8.0010.4024.0000	9.53	(3/8)
8.0010.4025.0000	12	
8.0010.4026.0000	12.7	(1/2)

Note: Use with 15 mm bore size hollow shaft RI-12 encoder.

Incremental Type RI10 (Shaft)

Part Number Key: RI-10 Shaft Version

A	B	C		D	E		F		G/H
RI-10S	6	Z2	-	2B	1024	-	H1181	/	Specials

A	Type
RI-10S	Ø 2", Shaft, IP67 Shaft Seal
RI-10T	Ø 2", Shaft, IP65 Shaft Seal

B	Shaft (Ø x L)
6	Ø 6 mm x 10 mm
8	Ø 8 mm x 15 mm
10	Ø 10 mm x 20 mm
12	Ø 12 mm x 20 mm
A0	Ø 1/4" ¹⁾
A1	Ø 3/8" ²⁾

¹⁾ 1/4" x 5/8" for Flange Z2, Z4, C & S. 1/4" x 7/8" for Flange R & S0.
²⁾ 3/8" x 5/8" for Flange Z2, Z4, C & S. 3/8" x 7/8" for Flange R & S0.

C	Flange
Z2	Ø 2" Servo Flange
Z4	2" Square Flange
C	Ø 58 mm Clamping Flange
S	Ø 58 mm Servo Flange
R	2.5" Square Flange
S0	Ø 2.5" Servo Flange

D	Voltage Supply and Output Type
2B	10-30 VDC, Line Driver (IC-DL)
2K	5-30 VDC, Line Driver (7272 w/o Bypass Capacitor)
4A	5 VDC, TTL (26C31)
4B	5-30 VDC, TTL (26C31)
CA	5-30 VDC, Open Collector

E	Pulse Rate
	1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 250 Pulses => 250)
	Other Pulse Rates Available on Request

F	Type of Connection
H1181	Radial 8-pin M12 eurofast ® Connector
H1481	Axial 8-pin M12 eurofast ® Connector
12M23	Radial 12-pin M23 multifast ® Connector
12M23A	Axial 12-pin M23 multifast ® Connector
6MIL	Radial 6-pin MS Connector
7MIL	Radial 7-pin MS Connector
10MIL	Radial 10-pin MS Connector
C1M	Radial Cable (1 m PVC)
CA1M	Axial Cable (1 m PVC)

G	Special Output Signal Formats
	N21 to N33 (See Page E34)

H	Special Connector Pin Configuration
	N35 to N41 (See Page E12)


Accessories:

- See page H1, Connectivity, for cables and connectors
- See page G1, Accessories, for mounting attachments and couplings


Incremental Type RI-10 (Shaft) / RI-12 (Hollow Shaft)

Dimensions: RI-10 Shaft Version


RI-10 Flange Z2 Connection H1181 & H1481

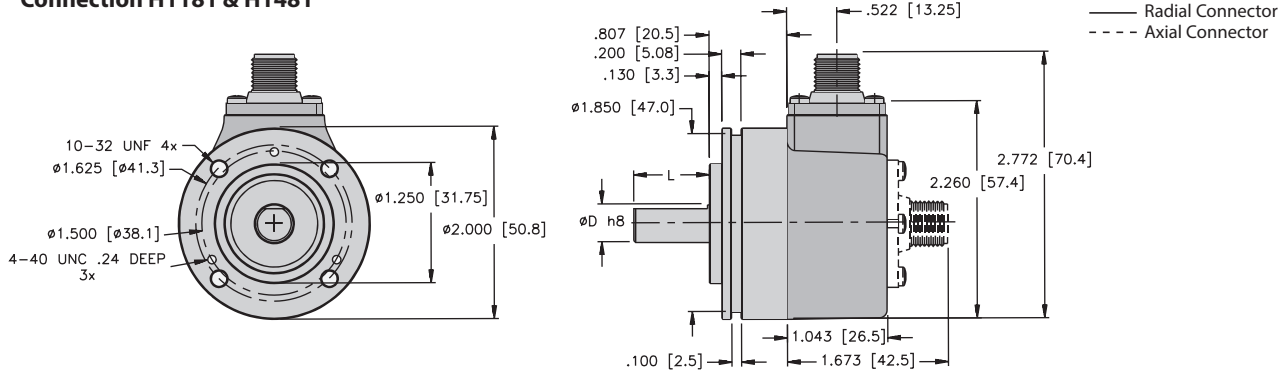

RI-10 Flange Z4 Connection C & CA

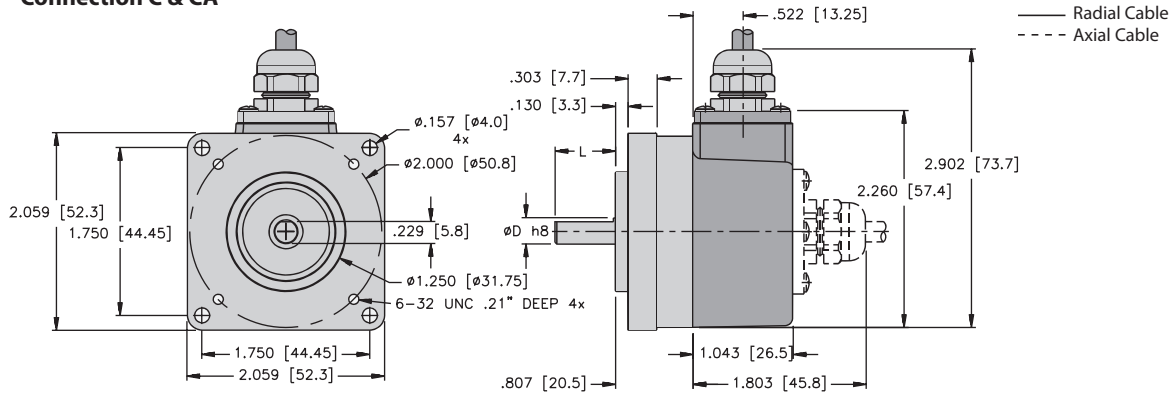

RI-10 Flange R Connection 6 MIL, 7 MIL & 10 MIL

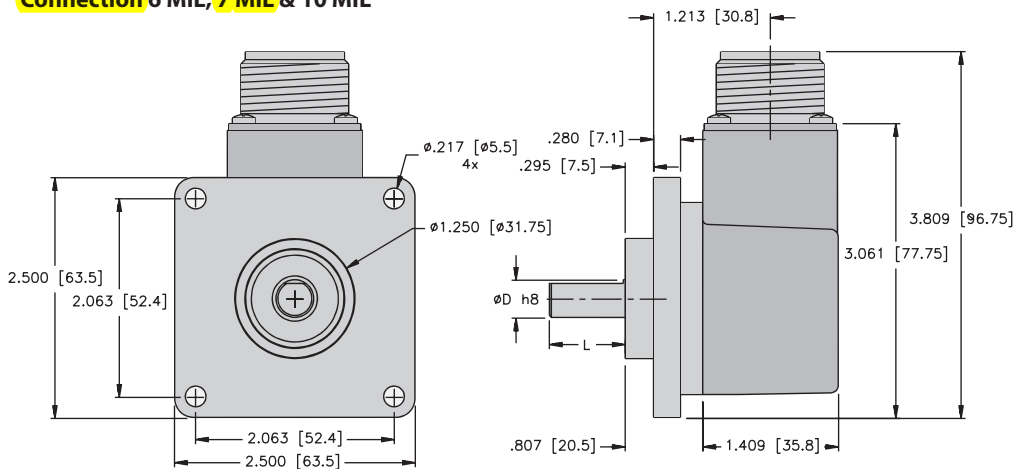

Mounting advice:

The flanges and shafts of the encoder and drive should not be rigidly coupled together at the same time. We recommend the use of suitable couplings (see page G1, Accessories).