

# PT 1,5/S-3L - Multi-level terminal block




3213713

<https://www.phoenixcontact.com/us/products/3213713>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Multi-level terminal block, nom. voltage: 500 V, nominal current: 15 A, connection method: Push-in connection, 1 level, Rated cross section: 1.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 1.5 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: gray



## Your advantages

- Time-saving conductor connection thanks to tool-free direct-connection technology
- Convenient plugging with lower insertion force
- High conductor pull-out forces due to the spring design
- Vibration-resistant and maintenance-free conductor connection
- Full flexibility thanks to the standardized CLIPLINE complete bridging, marking, and testing accessories
- High space savings thanks to the compact integration of two separate circuits in a single terminal block
- Optimized for manual and automated wiring

## Commercial data

Item number	3213713
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE22
Product key	BE2215
GTIN	4046356572484
Weight per piece (including packing)	12.02 g
Weight per piece (excluding packing)	11.957 g
Customs tariff number	85369010
Country of origin	PL

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## Technical data

### Product properties

Product family	PT
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	6
Number of rows	3
Potentials	3

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.56 W

### Connection data

Number of connections per level	2
Nominal cross section	1.5 mm <sup>2</sup>

#### 1 level

Connection method	Push-in connection
Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A1 / B1
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Cross section AWG	26 ... 16 (converted acc. to IEC)
Conductor cross-section flexible	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section, flexible [AWG]	26 ... 16 (converted acc. to IEC)
Conductor cross-section flexible ultrasound-compressed	0.34 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section, flexible [AWG] ultrasound-compressed	22 ... 16 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Flexible conductor cross-section (ferrule with plastic sleeve)	0.14 mm <sup>2</sup> ... 1 mm <sup>2</sup> (Using the AI-S 1-8 TQ ferrule, Item No. 1200293, is recommended)
Nominal cross section	1.5 mm <sup>2</sup>
Nominal current	15 A
Maximum load current	15 A
Nominal voltage	500 V

#### 1 level Connection cross sections directly pluggable

Conductor cross-section rigid	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section flexible (ferrule without plastic sleeve)	0.34 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



Flexible conductor cross-section (ferrule with plastic sleeve)	0.34 mm <sup>2</sup> ... 1 mm <sup>2</sup>
--	--

## Dimensions

Width	3.5 mm
End cover width	2.2 mm
Height	97.2 mm
Depth	51.7 mm
Depth on NS 35/7,5	53.2 mm
Depth on NS 35/15	60.7 mm

## Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Electrical tests

### Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

### Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 1.5 mm <sup>2</sup>	0.18 kA
Result	Test passed

### Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

## Mechanical properties

### Mechanical data

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

Open side panel

Yes

## Mechanical tests

### Mechanical strength

Result	Test passed
--------	-------------

### Attachment on the carrier

DIN rail/fixing support	NS 35
Test force setpoint	1 N
Result	Test passed

### Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross-section/weight	0.14 mm <sup>2</sup> / 0.2 kg
	1.5 mm <sup>2</sup> / 0.4 kg
Result	Test passed

## Environmental and real-life conditions

### Aging

Temperature cycles	192
Result	Test passed

### Needle-flame test

Time of exposure	30 s
Result	Test passed

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Long life test category 1, class B, body mounted
Frequency	f <sub>1</sub> = 5 Hz to f <sub>2</sub> = 150 Hz
ASD level	1.857 (m/s <sup>2</sup> ) <sup>2</sup> /Hz
Acceleration	0.8g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

### Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15

# PT 1,5/S-3L - Multi-level terminal block


3213713

<https://www.phoenixcontact.com/us/products/3213713>



## Drawings

Circuit diagram

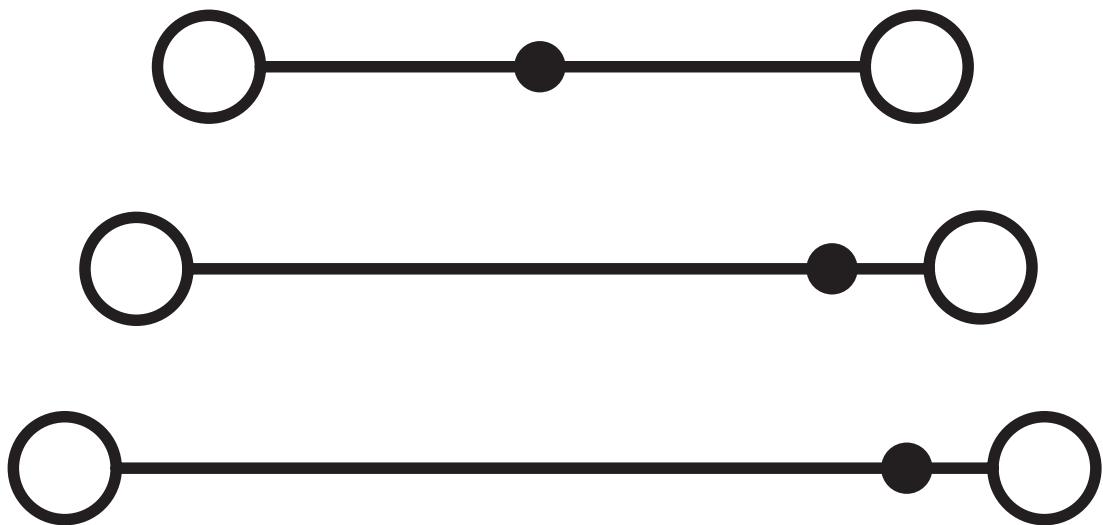

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3213713>

		CSA		
		Approval ID: 2030668		
		Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG
B		300 V	15 A	26 - 14
C		300 V	15 A	26 - 14
D		600 V	5 A	26 - 14

		EAC		
		Approval ID: RU C-DE.BL08.B.00644		

		cULus Recognized		
		Approval ID: E60425		
		Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG
B		300 V	15 A	26 - 14
C		300 V	15 A	26 - 14
D		600 V	5 A	26 - 14

		LR		
		Approval ID: LR2371832TA		

		NK		
		Approval ID: 14ME0912		

		DNV		
		Approval ID: TAE000010T		

		EAC		
		Approval ID: KZ7500651131219505		

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## Classifications

### ECLASS

ECLASS-13.0	27250102
ECLASS-15.0	27250102

### ETIM

ETIM 10.0	EC000897
-----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

### EF3.1 Climate Change

CO2e kg	0.058 kg CO2e
---------	---------------

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## Accessories

 Note: Applying some accessories below might limit this product.

### FBS 2-3,5 - Plug-in bridge

3213014

<https://www.phoenixcontact.com/us/products/3213014>

Plug-in bridge, pitch: 3.5 mm, number of positions: 2, nominal current: 17.5 A,  
color: red



 Max. current carrying capacity: 15 A

### FBS 3-3,5 - Plug-in bridge

3213027

<https://www.phoenixcontact.com/us/products/3213027>

Plug-in bridge, pitch: 3.5 mm, number of positions: 3, nominal current: 17.5 A,  
color: red



 Max. current carrying capacity: 15 A

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## FBS 4-3,5 - Plug-in bridge

3213030

<https://www.phoenixcontact.com/us/products/3213030>

Plug-in bridge, pitch: 3.5 mm, number of positions: 4, nominal current: 17.5 A,  
color: red



Max. current carrying capacity: 15 A

---

## FBS 5-3,5 - Plug-in bridge

3213043

<https://www.phoenixcontact.com/us/products/3213043>

Plug-in bridge, pitch: 3.5 mm, number of positions: 5, nominal current: 17.5 A,  
color: red



Max. current carrying capacity: 15 A

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## FBS 10-3,5 - Plug-in bridge

3213056

<https://www.phoenixcontact.com/us/products/3213056>

Plug-in bridge, pitch: 3.5 mm, number of positions: 10, nominal current: 17.5 A,  
color: red



Max. current carrying capacity: 15 A

---

## FBS 20-3,5 - Plug-in bridge

3213069

<https://www.phoenixcontact.com/us/products/3213069>

Plug-in bridge, pitch: 3.5 mm, number of positions: 20, nominal current: 17.5 A,  
color: red



Max. current carrying capacity: 15 A

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## FBS 2-3,5 BU - Plug-in bridge

3213086

<https://www.phoenixcontact.com/us/products/3213086>

Plug-in bridge, pitch: 3.5 mm, number of positions: 2, nominal current: 17.5 A,  
color: blue



Max. current carrying capacity: 15 A

---

## FBS 3-3,5 BU - Plug-in bridge

3213099

<https://www.phoenixcontact.com/us/products/3213099>

Plug-in bridge, pitch: 3.5 mm, number of positions: 3, nominal current: 17.5 A,  
color: blue



Max. current carrying capacity: 15 A

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## FBS 4-3,5 BU - Plug-in bridge

3213109

<https://www.phoenixcontact.com/us/products/3213109>

Plug-in bridge, pitch: 3.5 mm, number of positions: 4, nominal current: 17.5 A,  
color: blue



Max. current carrying capacity: 15 A

---

## FBS 5-3,5 BU - Plug-in bridge

3213112

<https://www.phoenixcontact.com/us/products/3213112>

Plug-in bridge, pitch: 3.5 mm, number of positions: 5, nominal current: 17.5 A,  
color: blue



Max. current carrying capacity: 15 A

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## FBS 10-3,5 BU - Plug-in bridge

3213125

<https://www.phoenixcontact.com/us/products/3213125>

Plug-in bridge, pitch: 3.5 mm, number of positions: 10, nominal current: 17.5 A,  
color: blue



Max. current carrying capacity: 15 A

---

## FBS 20-3,5 BU - Plug-in bridge

3213138

<https://www.phoenixcontact.com/us/products/3213138>

Plug-in bridge, pitch: 3.5 mm, number of positions: 20, nominal current: 17.5 A,  
color: blue



Max. current carrying capacity: 15 A

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## FBS 2-3,5 GY - Plug-in bridge

3213153

<https://www.phoenixcontact.com/us/products/3213153>

Plug-in bridge, pitch: 3.5 mm, number of positions: 2, nominal current: 17.5 A,  
color: gray



Max. current carrying capacity: 15 A

---

## FBS 3-3,5 GY - Plug-in bridge

3213167

<https://www.phoenixcontact.com/us/products/3213167>

Plug-in bridge, pitch: 3.5 mm, number of positions: 3, nominal current: 17.5 A,  
color: gray



Max. current carrying capacity: 15 A

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## FBS 4-3,5 GY - Plug-in bridge

3213180

<https://www.phoenixcontact.com/us/products/3213180>

Plug-in bridge, pitch: 3.5 mm, number of positions: 4, nominal current: 17.5 A,  
color: gray



Max. current carrying capacity: 15 A

---

## FBS 5-3,5 GY - Plug-in bridge

3213183

<https://www.phoenixcontact.com/us/products/3213183>

Plug-in bridge, pitch: 3.5 mm, number of positions: 5, nominal current: 17.5 A,  
color: gray



Max. current carrying capacity: 15 A

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## FBS 10-3,5 GY - Plug-in bridge

3213196

<https://www.phoenixcontact.com/us/products/3213196>

Plug-in bridge, pitch: 3.5 mm, number of positions: 10, nominal current: 17.5 A,  
color: gray



Max. current carrying capacity: 15 A

---

## FBS 20-3,5 GY - Plug-in bridge

3213206

<https://www.phoenixcontact.com/us/products/3213206>

Plug-in bridge, pitch: 3.5 mm, number of positions: 20, nominal current: 17.5 A,  
color: gray



Max. current carrying capacity: 15 A

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## FBS 1,5/S-PV - Potential bridge

3216263

<https://www.phoenixcontact.com/us/products/3216263>

Vertical potential bridge, to connect the upper and lower level



## RB ST (2,5/4)-1,5/S - Reducing bridge

3214356

<https://www.phoenixcontact.com/us/products/3214356>

Reducing bridge, pitch: 6.7 mm, number of positions: 2, nominal current: 32 A, length: 23 mm, color: red



Max. current carrying capacity: 24 A

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## RB ST 16-1,5/S - Reducing bridge

3213254

<https://www.phoenixcontact.com/us/products/3213254>

Reducing bridge, pitch: 10 mm, number of positions: 2, length: 37 mm, color: red



Max. current carrying capacity: 24 A

---

## RB ST 10-1,5/S - Reducing bridge

3213252

<https://www.phoenixcontact.com/us/products/3213252>

Reducing bridge, pitch: 3.5 mm, number of positions: 2, length: 36 mm, color: red



Max. current carrying capacity: 24 A

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## RB ST 6-1,5/S - Reducing bridge

3213250

<https://www.phoenixcontact.com/us/products/3213250>

Reducing bridge, pitch: 8 mm, number of positions: 2, nominal current: 32 A, length: 30 mm, color: red



Max. current carrying capacity: 24 A

---

## FBS 50-3,5 - Plug-in bridge

3000706

<https://www.phoenixcontact.com/us/products/3000706>

Plug-in bridge, pitch: 3.5 mm, number of positions: 50, nominal current: 17.5 A, color: red



Max. current carrying capacity: 17.5 A

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## FBS 50-3,5 BU - Plug-in bridge

3000708

<https://www.phoenixcontact.com/us/products/3000708>

Plug-in bridge, pitch: 3.5 mm, number of positions: 50, nominal current: 17.5 A,  
color: blue



 Max. current carrying capacity: 17.5 A

---

## FBS 50-3,5 GY - Plug-in bridge

3000707

<https://www.phoenixcontact.com/us/products/3000707>

Plug-in bridge, pitch: 3.5 mm, number of positions: 50, nominal current: 17.5 A,  
color: gray



 Max. current carrying capacity: 17.5 A

---

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## D-PT 1,5/S-3L - End cover

3113771

<https://www.phoenixcontact.com/us/products/3113771>

End cover, depth: 45.5 mm, width: 2.2 mm, height: 97.2 mm, color: gray



---

## STP 3,5-3 - Marker carriers

0830132

<https://www.phoenixcontact.com/us/products/0830132>



Marker carriers, snaps into the PT 1,5/S-3L Push-in three-level terminal block, can be marked with UCT-TM 3,5, UCT-TMF 3,5, ZB 3,5, or ZBF 3,5, gray, unmarked, mounting type: plug in, text field height: 10.5 mm, text field width: 3.5 mm

---

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## D-PT 1,5/S-3L-0,8 OG - End cover

1029590

<https://www.phoenixcontact.com/us/products/1029590>

End cover, depth: 45.5 mm, width: 0.8 mm, height: 97.2 mm, color: orange



---

## AI-S 1 - 8 TQ - Ferrule

1200293

<https://www.phoenixcontact.com/us/products/1200293>

Ferrule, S-Slimline, Length contact range: 8 mm, sleeve length: 14 mm, color: turquoise



# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

---

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

---

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

---

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

---

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



---

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

---

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

---

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white

---

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

---

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

---

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

---

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver-colored

---

MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>



Test plug, with solder connection up to 1 mm<sup>2</sup> conductor cross-section, number of positions: 1, color: gray

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



---

## MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red



# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



---

## MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



---

## MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



---

## PS-3,5 - Test plug

3031010

<https://www.phoenixcontact.com/us/products/3031010>

Test plug, Modular test plug, number of positions: 1, color: red



# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## DP PS-3,5 - Spacer plate

3031011

<https://www.phoenixcontact.com/us/products/3031011>



Spacer plate, depth: 33.5 mm, width: 3.5 mm, height: 15.9 mm, number of positions: 1, color: red

---

## PS-3,5/E - Test plug

3031012

<https://www.phoenixcontact.com/us/products/3031012>



Test plug, Individual test plug, number of positions: 1, color: red

# PT 1,5/S-3L - Multi-level terminal block




3213713

<https://www.phoenixcontact.com/us/products/3213713>

ZBF 3,5:UNBEDRUCKT - Zack Marker strip, flat

0829392

<https://www.phoenixcontact.com/us/products/0829392>




Zack Marker strip, flat, Strip, white, unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 5.2 mm, text field width: 3.5 mm

---

ZBF 3,5 CUS - Zack Marker strip, flat

0829394

<https://www.phoenixcontact.com/us/products/0829394>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 5.2 mm, text field width: 3.5 mm

---

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



ZBF 3,5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0801406

<https://www.phoenixcontact.com/us/products/0801406>




Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 5. 15 mm, text field width: 3.5 mm

ZBF 3,5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0801407

<https://www.phoenixcontact.com/us/products/0801407>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 10, text field height: 5. 15 mm, text field width: 3.5 mm

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## UCT-TMF 3,5 - Marker for terminal blocks

0829486

<https://www.phoenixcontact.com/us/products/0829486>

Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 3.5 mm, Number of individual labels: 108, text field height: 4.7 mm, text field width: 2.7 mm



## UCT-TMF 3,5 CUS - Marker for terminal blocks

0829644

<https://www.phoenixcontact.com/us/products/0829644>

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 3.5 mm, Number of individual labels: 108, text field height: 4.7 mm, text field width: 2.7 mm



# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## SZF 0-0,4X2,5 - Screwdriver

1204504

<https://www.phoenixcontact.com/us/products/1204504>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

---

## ST-BW 0 - Actuation tool

1200135

<https://www.phoenixcontact.com/us/products/1200135>



Actuation tool, for all 1.5 mm<sup>2</sup> spring cages from PT 1,5/S and FT 1,5/S

# PT 1,5/S-3L - Multi-level terminal block

3213713


<https://www.phoenixcontact.com/us/products/3213713>



## PROJECT COMPLETE - Software

1050453

<https://www.phoenixcontact.com/us/products/1050453>



Intuitive planning and marking software for configuring terminal strips and for professional marking of marking materials for terminal blocks, conductors, cables, devices, and systems. The software is available for download

## CRIMPFOX CENTRUS 6S - Crimping pliers

1213144

<https://www.phoenixcontact.com/us/products/1213144>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm<sup>2</sup> ... 6 mm<sup>2</sup>, also for TWIN ferrules up to 2 x 4 mm<sup>2</sup>, automatic cross section adjustment, lateral insertion, equipped with fall protection

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## CRIMPFOX CENTRUS 10S - Crimping pliers

1213154

<https://www.phoenixcontact.com/us/products/1213154>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm<sup>2</sup> ... 10 mm<sup>2</sup>, also for TWIN ferrules up to 2 x 4 mm<sup>2</sup>, automatic cross section adjustment, lateral insertion, equipped with fall protection

## CRIMPFOX CENTRUS 6H - Crimping pliers

1213146

<https://www.phoenixcontact.com/us/products/1213146>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm<sup>2</sup> ... 6 mm<sup>2</sup>, also for TWIN ferrules up to 2 x 4 mm<sup>2</sup>, automatic cross section adjustment, lateral insertion, equipped with fall protection

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## CRIMPFOX CENTRUS 10H - Crimping pliers

1213156

<https://www.phoenixcontact.com/us/products/1213156>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm<sup>2</sup> ... 10 mm<sup>2</sup>, also for TWIN ferrules up to 2 x 4 mm<sup>2</sup>, automatic cross section adjustment, lateral insertion, equipped with fall protection

## CRIMPFOX 10S - Crimping pliers

1212045

<https://www.phoenixcontact.com/us/products/1212045>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm<sup>2</sup> ... 10 mm<sup>2</sup>, unlockable pressure lock, lateral entry

# PT 1,5/S-3L - Multi-level terminal block

3213713

<https://www.phoenixcontact.com/us/products/3213713>



## CRIMPFOX 6H - Crimping pliers

1212046

<https://www.phoenixcontact.com/us/products/1212046>

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm<sup>2</sup> ... 6 mm<sup>2</sup>, unlockable pressure lock, lateral entry



## CRIMPFOX 2,5-M - Crimping pliers

1212719

<https://www.phoenixcontact.com/us/products/1212719>

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>, lateral entry, trapezoidal crimp



# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## CRIMPFOX 6-M - Crimping pliers

1212720

<https://www.phoenixcontact.com/us/products/1212720>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6.0 mm<sup>2</sup>, lateral entry, trapezoidal crimp

---

## CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/us/products/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6.0 mm<sup>2</sup>, lateral entry, trapezoidal crimp

---

# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## CRIMPFOX 6T - Crimping pliers

1212037

<https://www.phoenixcontact.com/us/products/1212037>

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6 mm<sup>2</sup>, lateral entry, trapezoidal crimp



## CRIMPFOX 6T-F - Crimping pliers

1212038

<https://www.phoenixcontact.com/us/products/1212038>

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6 mm<sup>2</sup>, front entry, trapezoidal crimp



# PT 1,5/S-3L - Multi-level terminal block



3213713

<https://www.phoenixcontact.com/us/products/3213713>

## CRIMPFOX 6S-F - Crimping pliers

1212043

<https://www.phoenixcontact.com/us/products/1212043>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.5 mm<sup>2</sup> ... 6 mm<sup>2</sup>, front entry, square crimp

## CRIMPFOX-M - Crimping pliers

1212072

<https://www.phoenixcontact.com/us/products/1212072>



Basic pliers, for accommodating dies for a wide range of type of contacts

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)