# TTC-6P-4-24DC-PT-I - Surge protection device

1106014

https://www.phoenixcontact.com/us/products/1106014

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.






Surge protection, consisting of protective plug and base element, with integrated status indicator for a 4-wire floating signal circuit with high nominal current. Ideal for 4-wire measurements, e.g., of temperatures and weights. Can be used in safety-related circuits up to SIL 3.

## Your advantages

- Efficient use of space: the narrowest pluggable surge protection solution for 4-conductor applications
- Easy function monitoring: on-site or optionally via remote signaling, with optical monitoring, without additional effort
- Servicing without affecting the signal: replace the surge protection module without affecting the measuring signal
- Flexible choice: Push-in Technology or screw connection

ELEKTROGERÄTE RÜCKNAHME

## Commercial data

| | |
|---|---|
| Item number | 1106014 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | CL23 |
| Weight per piece (excluding packing) | 40 g |
| Customs tariff number | 85363010 |
| Country of origin | DE |

## Technical data

### Product properties

| | |
|---|---|
| Product type | Surge protection for MCR technology |
| Product family | TERMITRAB complete |
| IEC test classification | C1 |
| | C2 |
| | C3 |
| | D1 |
| Type | DIN rail module, two-section, divisible |

Insulation characteristics

| | |
|---|---|
| Overvoltage category | III |
| Pollution degree | 2 |


### Electrical properties

| | |
|---|---|
| Nominal voltage $U_N$ | 24 V DC |
| | 24 V AC |

### Connection data

| | |
|---|---|
| Connection method | Push-in connection |
| Conductor cross-section flexible | 0.2 mm² ... 2.5 mm² |
| Conductor cross-section rigid | 0.2 mm² ... 4 mm² |
| Conductor cross-section AWG | 24 ... 12 |

### Dimensions

| | |
|---|---|
| Dimensional drawing |   |
| Width | 6.2 mm +0.1 mm |
| Height | 125 mm |
| Depth | 100 mm (incl. DIN rail 7.5 mm) |

### Material specifications

| | |
|---|---|
| Color (Base element) | gray (RAL 7042) |
| Color (Male connector) | light gray (RAL 7035) |
| Flammability rating according to UL 94 | V-0 |
| Insulating material | PBT |
| Housing material | PBT |

### Mechanical properties

Mechanical data

| | |
|---|---|
| Open side panel | No |

## Protective circuit

| | |
|---|---|
| Direction of action | Line-Line & Line-Earth Ground |
| Nominal voltage $U_N$ | 24 V DC |
| | 24 V AC |
| Maximum continuous operating voltage $U_C$ | 36 V DC |
| | 30 V AC |
| Rated current | 2.5 A (60°C for insulated systems) |
| Operating effective current $I_C$ at $U_C$ | ≤ 5 µA |
| Protective conductor current $I_{PE}$ | ≤ 1 µA |
| Nominal discharge current $I_n$ (8/20) µs (line-line) | 350 A |
| Nominal discharge current $I_n$ (8/20) µs (line-ground) | 5 kA |
| Pulse discharge current $I_{imp}$ (10/350) µs (line-earth) | 0.5 kA |
| Total discharge current $I_{Total}$ (8/20) µs | 10 kA |
| Voltage protection level $U_p$ (line-line) | ≤ 100 V (C1 - 0.7 kV / 350 A) |
| | ≤ 100 V (C3 - 50 A) |
| | ≤ 80 V (C3 - 25 A) |
| Voltage protection level $U_p$ (line-earth) | ≤ 900 V (C1 - 1 kV / 500 A) |
| | ≤ 900 V (C2 - 10 kV / 5 kA) |
| Response time $t_A$ (line-line) | ≤ 1 ns |
| Response time $t_A$ (line-earth) | ≤ 100 ns |
| Input attenuation aE, sym. | typ. 0.3 dB (≤ 12 MHz / 150 Ω) |
| Cut-off frequency fg (3 dB), sym. in 150 Ω system | > 60 MHz |
| Capacity (Core-Core) | typ. 30 pF |
| Capacity (Core-Earth) | typ. 30 pF |
| Resistance per path | 0.03 Ω |
| Surge protection fault message | optical |
| Max. required back-up fuse | 2.5 A (F) |
| Impulse durability (line-line) | C1 - 700 V / 350 A |
| | C3 - 50 A |
| Impulse durability (line-earth) | C1 - 1 kV / 500 A |
| | C2 - 10 kV / 5 kA |
| | C3 - 100 A |
| | D1 - 500 A |

### Additional technical data

| | |
|---|---|
| Max. total discharge current $I_{total\ max}$ (8/20) µs | 20 kA (1x) |

## Environmental and real-life conditions

### Ambient conditions

| | |
|---|---|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 85 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |

| | |
|---|---|
| Altitude | ≤ 6000 m (amsl) |
| Permissible humidity (operation) | 5 % ... 95 % |

## Approvals

Conformity/Approvals

| | |
|---|---|
| UL, USA / Canada | Class I, Div. 2, Groups A, B, C, D T4A |

## Standards and regulations

| | |
|---|---|
| Standards/specifications | IEC 61643-21 |
| Note | 2000 + corrigendum 2001 + A1:2008, modified + A2:2012 |

EN 61643-21


| | |
|---|---|
| Standards/specifications | EN 61643-21 |
| Note | 2001 + A1:2009 + A2:2013 |

## Mounting

| | |
|---|---|
| Mounting type | DIN rail: TH 35 - 7.5 mm |

## Drawings

Dimensional drawing

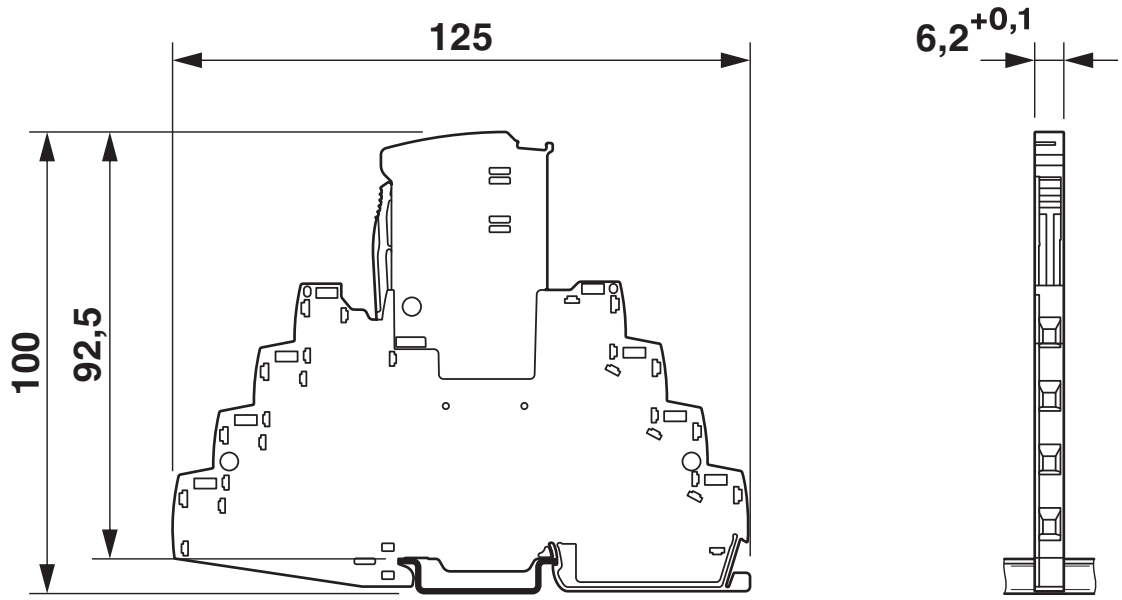



Schematic diagram


| TTC-6P-4-...DC-...-I | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Category | 1oo1 architecture, HFT=0 | | | | 1oo2 architecture, HFT=1 | | | | |
| | $PFD_{AVG}$ | PFH | Used budget of SIL 2 SIF | | $PFD_{AVG}$ | PFH | CCF | Used budget of SIL 3 SIF | |
| | | | $PFD_{AVG}$ | PFH | | | | $PFD_{AVG}$ | PFH |
| | $1.23_{x10^{-4}}$ | $2.18_{x10^{-8}}$ 1/h | 1.2 % | 2.2 % | $6.15_{x10^{-6}}$ | $1.09_{x10^{-9}}$ 1/h | 5 % | 0.6 % | 1.1 % |
| | | | | | $1.24_{x10^{-5}}$ | $2.18_{x10^{-8}}$ 1/h | 10 % | 1.2 % | 2.2 % |
| | Calculation based on exida report, Phoenix Contact 16/06-072 R022 V4R2<br>exida Profile 1, FMEDA Analysis 2, $T_{proof}$: 1 year, MT: 10 years, MTTR: 24 hours, PTC: 99%<br>Used standards<br>IEC/EN 61508, edition 2010 (device specific)<br>IEC/EN 61511, edition 2016 + COR1:2016 + A1:2017 (system specific) | | | | | | | | |

Functional safety scenarios

Diagram

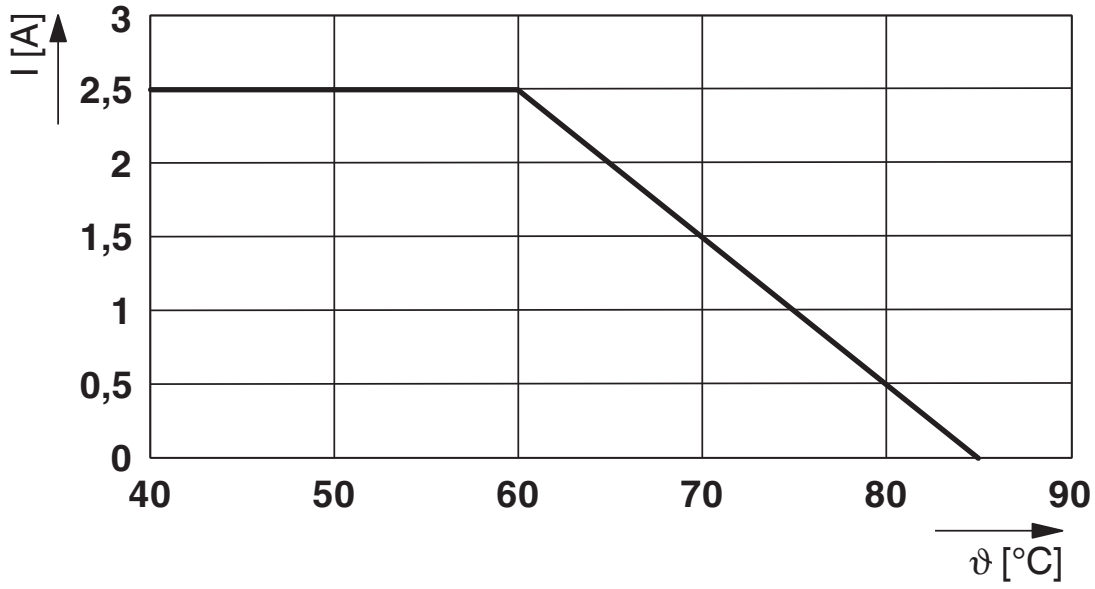


Circuit diagram

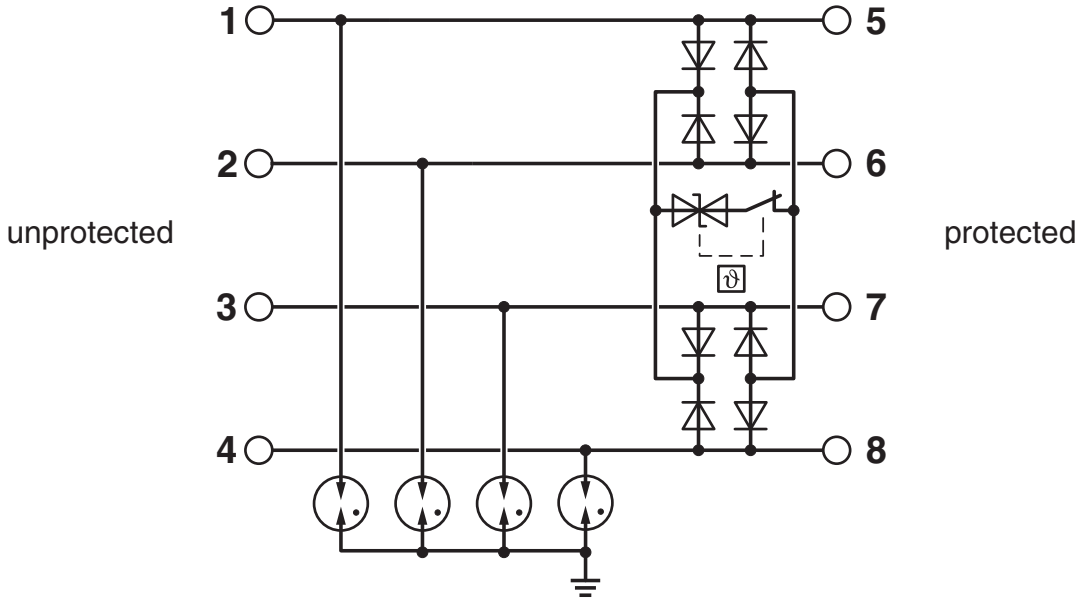

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-13.0 | 27171501 |
| ECLASS-15.0 | 27171501 |

### ETIM

| | |
|---|---|
| ETIM 10.0 | EC001466 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 39121600 |

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a) |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | aacb531d-9b60-4ae6-923a-43b9de0e288d |

EF3.1 Climate Change

| | |
|---|---|
| CO2e kg | 2.936 kg CO2e |


Phoenix Contact 2026 © - all rights reserved
https://www.phoenixcontact.com



Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com