# GW PL ETH/UNI-BUS - Ethernet HART multiplexer

2702233

https://www.phoenixcontact.com/us/products/2702233

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Ethernet head station for modular HART gateway. Connect up to five GW PL HART…-BUS expansion modules to communicate with up to 40 HART devices. Supports Modbus TCP, OPC UA, PROFINET, HART IP, FDT/DTM and Arcom.

## Product description

Ethernet HART multiplexer provides a simple way to parameterize and monitor HART instruments on an Ethernet network and is an ideal replacement for RS-485 HART multiplexer systems. The multiplexer allows users to perform time and money saving operations from the comfort of an office – including loop checks, device calibration, and improved process monitoring with multivariable devices.

## Your advantages

- Available communication DTM integrates into an FDT/DTM container and provides the ability to remotely configure HART instruments
- Extended temperature range of -40 °C … +70 °C
- Independent HART controller per channel ensures fastest update rates
- Monitor PV, SV, TV, QV HART variables using Modbus/TCP or PROFINET
- Monitor up to 14 HART variables using OPC UA
- Supports Arcom for simple integration into Emerson AMS

ELEKTROGERÄTE RÜCKNAHME

## Commercial data

| | |
|---|---|
| Item number | 2702233 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DN11 |
| Product key | DNC322 |
| GTIN | 4055626067049 |

| | |
|---|---|
| Weight per piece (including packing) | 218.8 g |
| Weight per piece (excluding packing) | 216.9 g |
| Customs tariff number | 85176200 |
| Country of origin | DE |

## Technical data

### Notes

Note on application

| | |
|---|---|
| Note on application | Only for industrial use |

Utilization restriction

| | |
|---|---|
| CCCex note | Use in potentially explosive areas is not permitted in China. |

### Product properties

| | |
|---|---|
| Product type | Gateways/Proxies |
| MTBF | 292 Years (Siemens model SN29500, temperature 40°C, env. factor 1.5 and stress factor 50%) |

### Electrical properties

| | |
|---|---|
| Test voltage data interface/power supply | 500 V AC |

Supply

| | |
|---|---|
| Supply voltage range | 19.2 V DC ... 30 V DC |
| Typical current consumption | 46 mA (at 24 V DC) |
| Max. current consumption | 63 mA (at 24 V DC) |

### Interfaces

| | |
|---|---|
| Web server | yes |

Data

| | |
|---|---|
| Transmission length | ≤ 100 m |
| Output nominal voltage | 24 V DC |
| Maximum output current | 3.937 A (per station) |


Data: Modbus/TCP, HART IP, PROFINET

| | |
|---|---|
| Connection method | RJ45 socket, auto negotiation and auto crossing |
| Protocols supported | Modbus/TCP, HART IP, PROFINET |

### Signaling

| | |
|---|---|
| Status display | Green LED (power and status) |

### Dimensions

| | |
|---|---|
| Dimensional drawing |  |
| Width | 22.5 mm |

| | |
|---|---|
| Height | 99 mm |
| Depth | 114.5 mm |

## Material specifications

| | |
|---|---|
| Color (Housing) | light gray (RAL 7035) |

## Environmental and real-life conditions

### Ambient conditions

| | |
|---|---|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 70 °C |
| | -40 °F ... 158 °F |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |

## Approvals

### Conformity/Approvals

| | |
|---|---|
| Conformance | CE-compliant |
| Noxious gas test | ISA-S71.04-1985 G3 Harsh Group A |

### Ex data

| | |
|---|---|
| ATEX | Ⓔx II 3 G Ex nA IIC T4 Gc DEMKO 17 ATEX 1749X |
| IECEx | IECEx ULD 17.0020X Ex nA IIC T4 Gc |
| UL, USA / Canada | Class I, Div. 2, Groups A, B, C, D |

## EMC data


| | |
|---|---|
| Electromagnetic compatibility | Conformance with EMC Directive 2004/108/EC |

## Mounting


| | |
|---|---|
| Mounting type | DIN rail mounting |
| Assembly note | on standard DIN rail NS 35 in accordance with EN 60715 |
| Mounting position | any |
| Useable DIN rail type | DIN rail: 35 mm |

## Drawings

Dimensional drawing

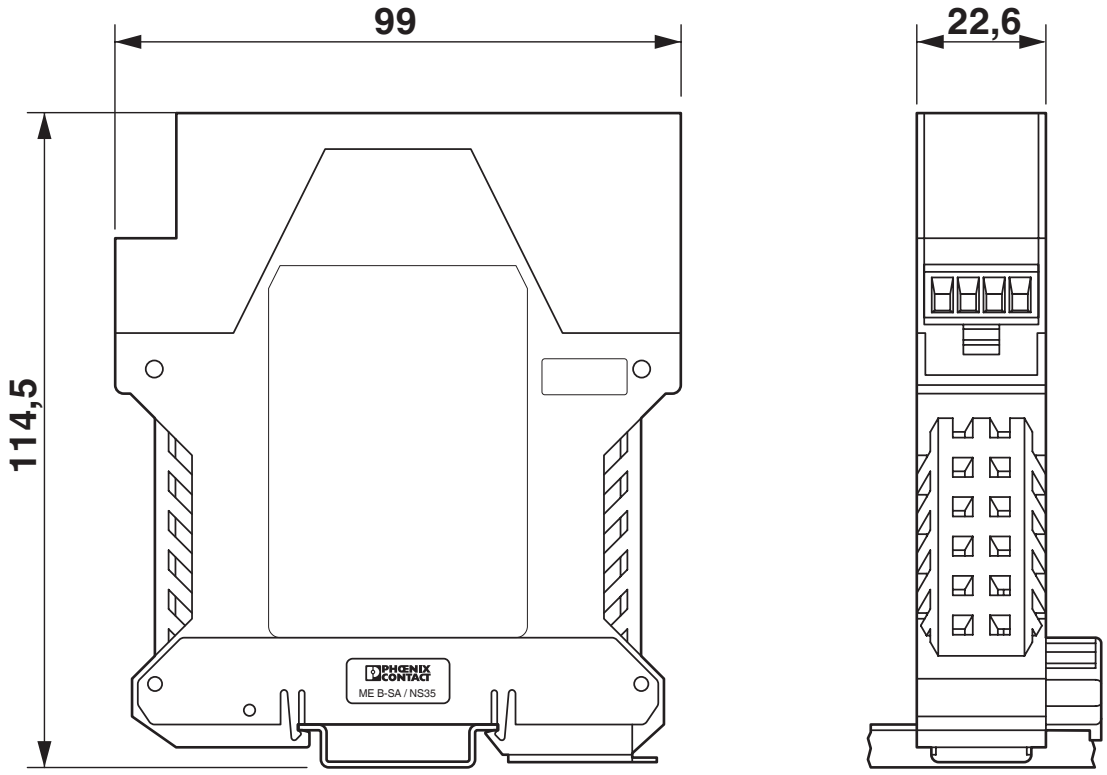

Block diagram

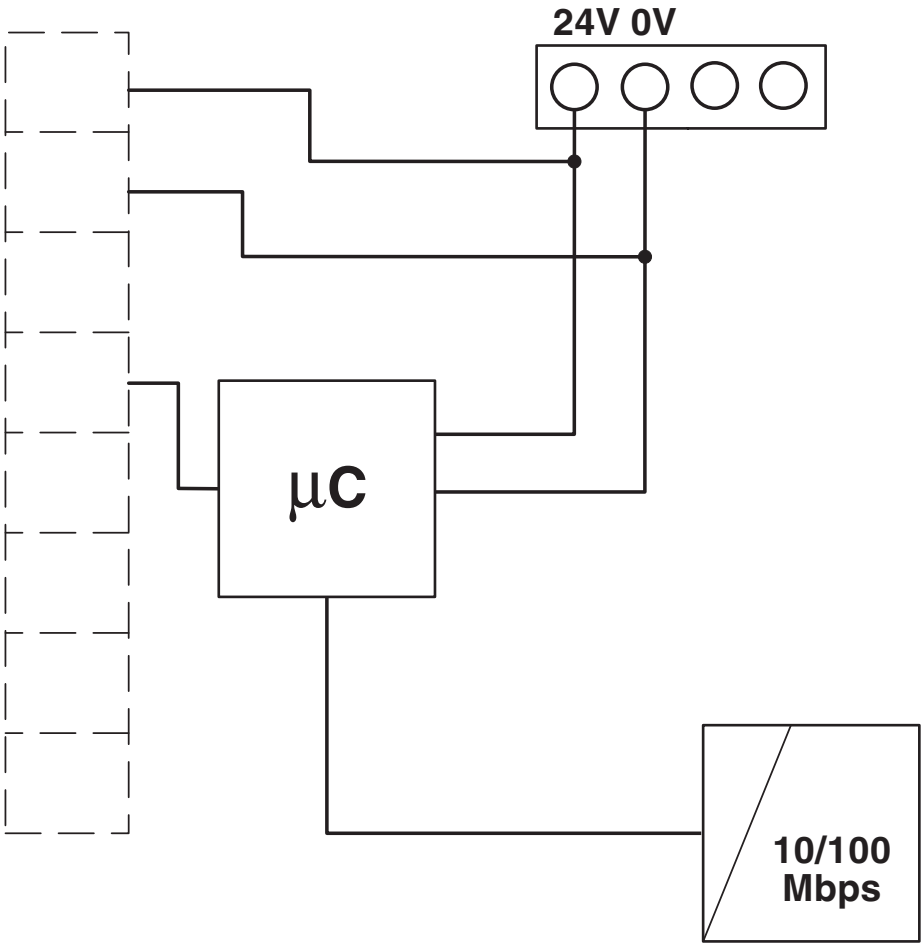

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-13.0 | 27242208 |
| ECLASS-15.0 | 27242208 |

### ETIM

| | |
|---|---|
| ETIM 10.0 | EC001423 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 32151700 |

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2026 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com