MALE END VIEW




1 = BROWN


2 = WHITE $\overline{3} = BLUE$

4 = BLACK

\triangle	ภากใหกใ
W	íast.

SPECIFICATIONS				
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
HOUSING MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	9.0 A			
RATED VOLTAGE [V]	600 V			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	4x18 AWG			
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K			



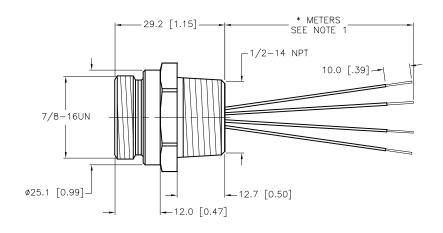

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS 01	THERWISE SPECIFIED			

NOTES:

DESCRIPTION

UPDATE PROTECTION CLASS

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDESPECIFIC LENGTHS.

	RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RC	(763) (763)	LIS, MN -544-7 553-7	55441 7769 300 708 fax
		MATERIAL		DRFT JBJ	DATE 11/27/02	DESCRIPTION	40-*M/NPT		
		SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.0	N.SF	40- · M/ NP I		
			DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT	IDENTIFICATION NO.			REV
		FINISH	CONTACT TURCK	MILLIMETE	ER[INCH]	BENTI TOATION NO.			
1	76628	SEE SPECIFICATIONS	FOR MORE INFORMATION		-				
	ECO NO.			DO NOT SCALE	THIS DRAWING	FILE: 777001570		SHEET	1 OF 1

ER			

CBM 04/13/21

DATE

SOURCE DRAWING - FOR REFERENCE ONLY