


4x22 AWG AWM 21744 90C 600V

SPECIFICATIONS

- A 22 AWG 19x.0058" UNILAY TINNED COPPER
- B PVC INSULATION
- C 24 AWG TINNED COPPER DRAIN
- D ALUMINUM/POLYESTER FOIL SHIELD (FOIL IN)
- E TPU JACKET
JACKET COLOR: GRAY
CABLE IS RoHS COMPLIANT

CONDUCTOR COLORS

- 1 = RED
- 2 = BLACK
- 3 = WHITE
- 4 = GREEN

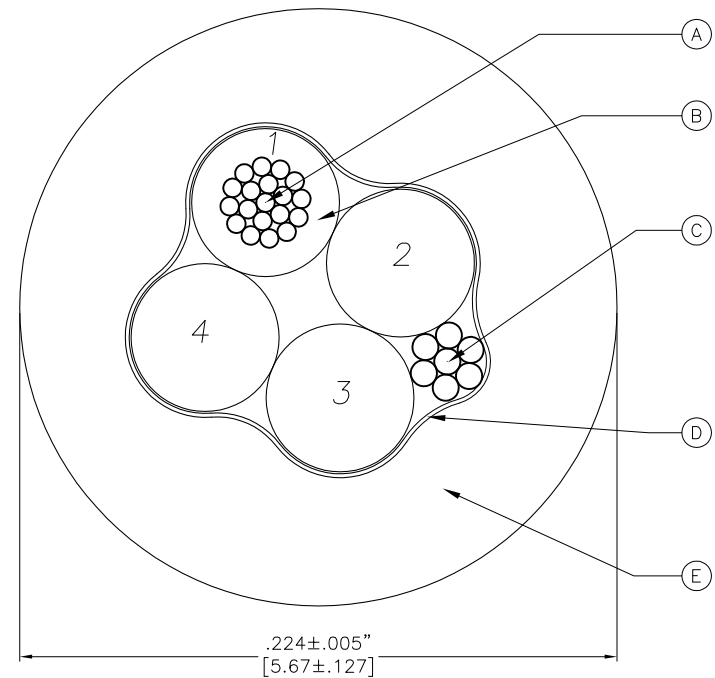

ELECTRICAL REQUIREMENTS
DIELECTRIC WITHSTAND VOLTAGE: 2.0 KVAC

MECHANICAL REQUIREMENTS
STATIC: 5x CABLE O.D.
FLEX SHIELDED: 15x CABLE O.D.

NOTES:

1. BLACK INK
101550701 22 AWG/4 RU AWM 90C 600V UL# CSA AWM CSA#
1/II A/B 90C 600V FT1 SUPPLIER LOT CODE (WHEN APPLICABLE)
MFG DATE CODE (EXAMPLE 00108 (DAY & YEAR))
2. c(UL) IS ACCEPTABLE IN PLACE OF ANY/ALL CSA MARKINGS.

NOTE: CONDUCTOR ROTATION MAY BE INVERTED FROM VIEW SHOWN **SOURCE DRAWING - FOR REFERENCE ONLY**

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL SEE SPECIFICATIONS	DRFT CK APVD DO	DATE 05/26/11 SCALE NONE	DESCRIPTION CAB,5.69,GRY,TPU,4X22,S-,AWM	
FINISH SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT INCH [MILLIMETER]		IDENTIFICATION NO. 101550701 (SOURCE)	REV E
E REMOVE "CE" MARK	RDS 07/19/17	61364	DO NOT SCALE THIS DRAWING		
REV DESCRIPTION	BY	DATE	ECO NO.	FILE: 101550701	SHEET 1 OF 1